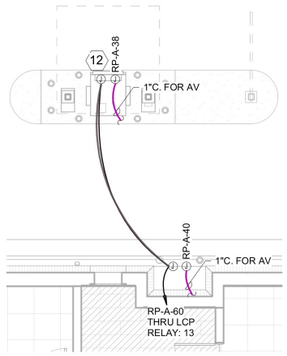

2 E-010 ELECTRICAL POWER & AUXILIARY RDT PLAN
3/16" = 1'-0"

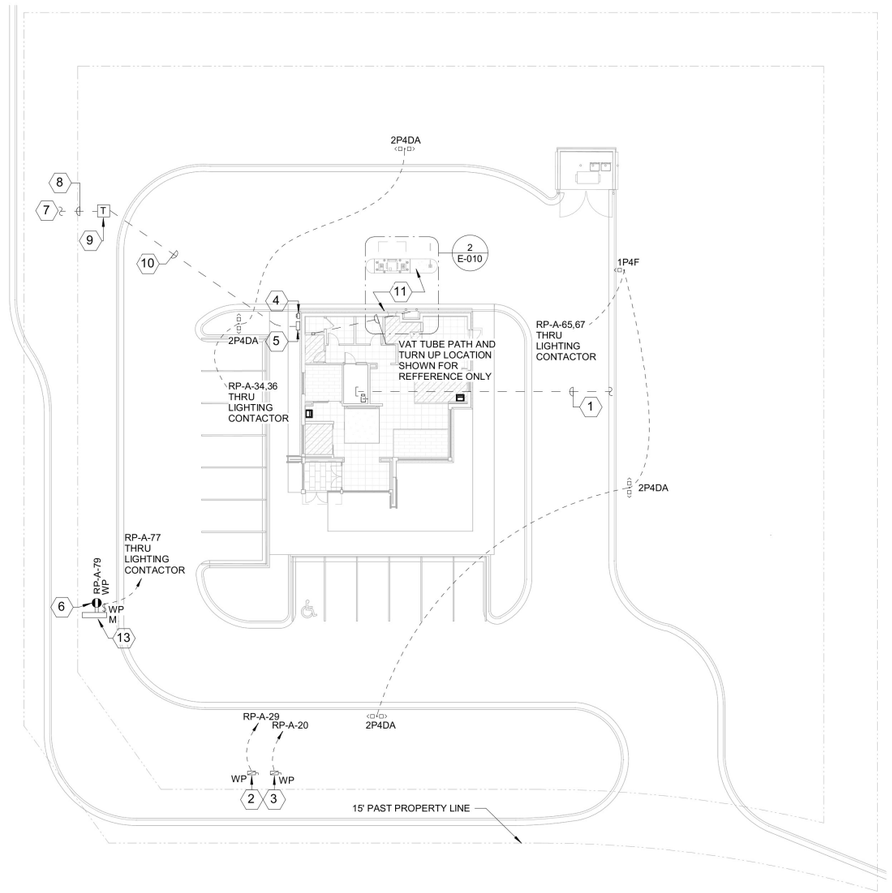

1 E-010 ELECTRICAL SITE PLAN
1" = 20'-0"

SHEET NOTES:

1. COORDINATE ALL SITE CONDUIT ROUTINGS WITH GENERAL CONTRACTOR.
2. REFER TO CIVIL PLANS FOR FINAL LOCATION AND ELECTRICAL REQUIREMENTS OF ALL SIGNAGE, UTILITY CONNECTION POINTS, AND SITE UTILITIES/EQUIPMENT SUCH AS LIFT STATIONS, IRRIGATION PUMPS/CONTROLLERS, HOT BOXES, ETC.
3. ALL UNDERGROUND WIRING SHALL BE LOCATED WITHIN 12" OF BACK OF CURB IN ALL LOCATIONS.
4. BACKFILL, TAMP, AND RESURFACE ALL EXISTING PAVEMENT/ASPHALT AND RESTORE ALL EXISTING LANDSCAPING DISTURBED AS A RESULT OF TRENCHING AND/OR DIRECTIONAL BORING TO ITS ORIGINAL CONDITION.
5. ALL UTILITY SERVICE SHALL BE VERIFIED WITH THE UTILITY COMPANIES PRIOR TO BIDDING AND ALL RESULTING COSTS SHALL BE INCLUDED IN BID
6. ACTUAL INSTALLATION OF ALL UTILITY SERVICES SHALL BE ACCORDING TO FINAL UTILITY COMPANY PLANS.
7. PROVIDE PULLWIRE IN ALL EMPTY CONDUITS.
8. USE JOINT TRENCHING WHEREVER POSSIBLE

KEYED NOTES:

1. ROUTE (2)4"C TO MAIN TELEPHONE SERVICE ENTRANCE. ROUTE TO CLEAR STRUCTURAL FOOTING. CONDUITS SHALL BE STUBBED UP AND CAPPED 12" A.F.F. IN BUILDING. ASBUILT DRAWINGS MUST SHOW CONDUIT LENGTH AND ROUTE
2. IRRIGATION BACKFLOW. VERIFY LOCATION DISCONNECT SHALL BE NEMA 3R.
3. DDCV HOTBOX. VERIFY LOCATION DISCONNECT SHALL BE NEMA 3R.
4. ELECTRIC UTILITY METER. PROVIDE ELECTRIC UTILITY METER PER POWER COMPANY REQUIREMENTS. REFER TO ELECTRICAL RISER DIAGRAM FOR ADDITIONAL INFORMATION. EXACT LOCATION TO BE DETERMINED BY UTILITY COMPANY REPRESENTATIVE IN FIELD.
5. SERVICE DISCONNECT. PROPOSED ELECTRICAL SERVICE DISCONNECT MOUNTED ON BUILDING EXTERIOR. REFER TO ELECTRICAL RISER DIAGRAM FOR ADDITIONAL INFORMATION.
6. MAINTENANCE RECEPTACLE: PROVIDE 120V, 20A, GFCI WEATHER-RESISTANT DUPLEX RECEPTACLE IN WEATHERPROOF SURFACE MOUNTED BELL BOX WITH "EXTRA DUTY WHILE-IN-USE" METALLIC COVER.
7. STUBOUT AND TERMINATE PER UTILITY COMPANY REQUIREMENTS. VERIFY LOCATION OF HIGH VOLTAGE SERVICE POINT PRIOR TO BIDDING AND INCLUDE ALL COST IN BID.
8. (2)5"C FOR HIGH VOLTAGE SERVICE FROM PROPERTY LINE TO TRANSFORMER SLABS VERIFY LOCATION AND ROUTING. HIGH VOLTAGE CONDUIT SHALL BE 48" DEEP. TERMINATE IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS INCLUDING TRENCHING AND BACKFILL TO 90% COMPACTION.
9. TRANSFORMER SLABBOX WITH TRAFFIC GUARDS PER UTILITY COMPANY REQUIREMENTS. VERIFY SIZE, LOCATION AND ORIENTATION WITH UTILITY COMPANY. CONTRACTOR WILL PROVIDE TRANSFORMER SLABS INSTALLED COMPLETE IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS. PROVIDE ADEQUATE GUARD RAILING AROUND POWER TRANSFORMERS IN PARKING AREAS.
10. SECONDARY FROM TRANSFORMER TO MAIN DISCONNECT. VERIFY ROUTING WITH UTILITY COMPANY AND ROUTE TO CLEAR STRUCTURAL FOOTING. SEE RISER DIAGRAM. TERMINATE IN ACCORDANCE WITH PLANS AND SPECIFICATIONS.
11. CANOPY LIGHT FIXTURE: FACTORY INSTALLED CANOPY LIGHT PROVIDED BY KIOSK MANUFACTURER. EC TO COORDINATE WITH THE MANUFACTURER AND MAKE FINAL CONNECTION.
12. DRIVE-THRU ATM: PROVIDE CONDUIT AND WIRING FOR ATM. REFER TO ELECTRICAL FLOOR PLAN ON SHEET E-500 FOR ADDITIONAL INFORMATION.
13. MONUMENT SIGN POWER: COORDINATE EXACT LOCATION OF SIGNAGE STUB-UP WITH SIGN VENDOR AND MAKE FINAL ELECTRICAL CONNECTIONS. PROVIDE 120V, 20A, TOGGLE SWITCH IN METALLIC BELL BOX WITH METALLIC WEATHERPROOF COVER IF DISCONNECT IS NOT FURNISHED WITH MONUMENT SIGN. COORDINATE EXACT LOCATION WITH CIVIL DRAWINGS.

1"DIA CONDUIT	4.8 FT
(2) 2"DIA CONDUIT	15.4 FT
1"DIA CONDUIT	15.4 FT

8 PM

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL SITE PLAN AND REMOTE DRIVE THRU

Sheet Number:
E-010

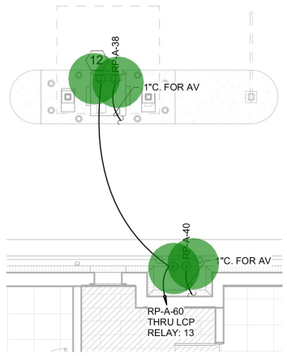

2 E-010 ELECTRICAL POWER & AUXILIARY RDT PLAN
3/16" = 1'-0"

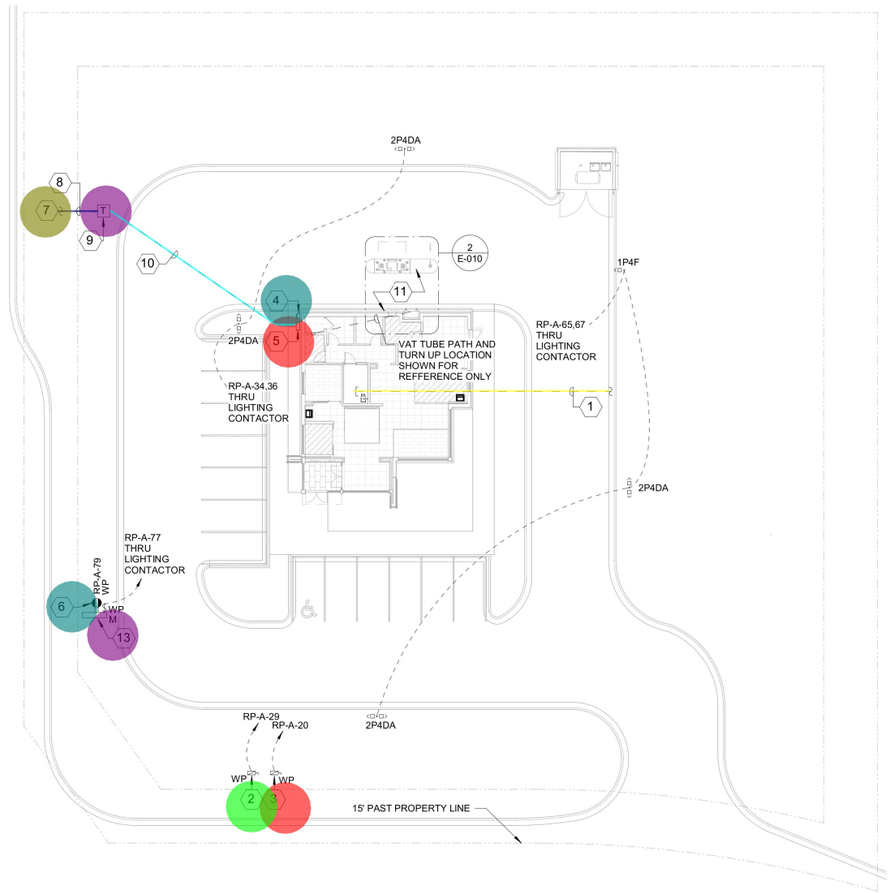

1 E-010 ELECTRICAL SITE PLAN
1" = 20'-0"

SHEET NOTES:

1. COORDINATE ALL SITE CONDUIT ROUTINGS WITH GENERAL CONTRACTOR.
2. REFER TO CIVIL PLANS FOR FINAL LOCATION AND ELECTRICAL REQUIREMENTS OF ALL SIGNAGE, UTILITY CONNECTION POINTS, AND SITE UTILITIES/EQUIPMENT SUCH AS LIFT STATIONS, IRRIGATION PUMPS/CONTROLLERS, HOT BOXES, ETC.
3. ALL UNDERGROUND WIRING SHALL BE LOCATED WITHIN 12" OF BACK OF CURB IN ALL LOCATIONS.
4. BACKFILL, TAMP, AND RESURFACE ALL EXISTING PAVEMENT/ASPHALT AND RESTORE ALL EXISTING LANDSCAPING DISTURBED AS A RESULT OF TRENCHING AND/OR DIRECTIONAL BORING TO ITS ORIGINAL CONDITION.
5. ALL UTILITY SERVICE SHALL BE VERIFIED WITH THE UTILITY COMPANIES PRIOR TO BIDDING AND ALL RESULTING COSTS SHALL BE INCLUDED IN BID
6. ACTUAL INSTALLATION OF ALL UTILITY SERVICES SHALL BE ACCORDING TO FINAL UTILITY COMPANY PLANS.
7. PROVIDE PULLWIRE IN ALL EMPTY CONDUITS.
8. USE JOINT TRENCHING WHEREVER POSSIBLE

KEYED NOTES:

1. ROUTE (2)4"C TO MAIN TELEPHONE SERVICE ENTRANCE. ROUTE TO CLEAR STRUCTURAL FOOTING. CONDUITS SHALL BE STUBBED UP AND CAPPED 12" A.F.F. IN BUILDING. ASBUILT DRAWINGS MUST SHOW CONDUIT LENGTH AND ROUTE
2. IRRIGATION BACKFLOW. VERIFY LOCATION DISCONNECT SHALL BE NEMA 3R.
3. DDCV HOTBOX. VERIFY LOCATION DISCONNECT SHALL BE NEMA 3R.
4. ELECTRIC UTILITY METER. PROVIDE ELECTRIC UTILITY METER PER POWER COMPANY REQUIREMENTS. REFER TO ELECTRICAL RISER DIAGRAM FOR ADDITIONAL INFORMATION. EXACT LOCATION TO BE DETERMINED BY UTILITY COMPANY REPRESENTATIVE IN FIELD.
5. SERVICE DISCONNECT. PROPOSED ELECTRICAL SERVICE DISCONNECT MOUNTED ON BUILDING EXTERIOR. REFER TO ELECTRICAL RISER DIAGRAM FOR ADDITIONAL INFORMATION.
6. MAINTENANCE RECEPTACLE: PROVIDE 120V, 20A, GFCI WEATHER-RESISTANT DUPLEX RECEPTACLE IN WEATHERPROOF SURFACE MOUNTED BELL BOX WITH "EXTRA DUTY WHILE-IN-USE" METALLIC COVER.
7. STUBOUT AND TERMINATE PER UTILITY COMPANY REQUIREMENTS. VERIFY LOCATION OF HIGH VOLTAGE SERVICE POINT PRIOR TO BIDDING AND INCLUDE ALL COST IN BID.
8. (2)5"C FOR HIGH VOLTAGE SERVICE FROM PROPERTY LINE TO TRANSFORMER SLABS VERIFY LOCATION AND ROUTING. HIGH VOLTAGE CONDUIT SHALL BE 48" DEEP. TERMINATE IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS INCLUDING TRENCHING AND BACKFILL TO 90% COMPACTION.
9. TRANSFORMER SLABBOX WITH TRAFFIC GUARDS PER UTILITY COMPANY REQUIREMENTS. VERIFY SIZE, LOCATION AND ORIENTATION WITH UTILITY COMPANY. CONTRACTOR WILL PROVIDE TRANSFORMER SLABS INSTALLED COMPLETE IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS. PROVIDE ADEQUATE GUARD RAILING AROUND POWER TRANSFORMERS IN PARKING AREAS.
10. SECONDARY FROM TRANSFORMER TO MAIN DISCONNECT. VERIFY ROUTING WITH UTILITY COMPANY AND ROUTE TO CLEAR STRUCTURAL FOOTING. SEE RISER DIAGRAM. TERMINATE IN ACCORDANCE WITH PLANS AND SPECIFICATIONS.
11. CANOPY LIGHT FIXTURE: FACTORY INSTALLED CANOPY LIGHT PROVIDED BY KIOSK MANUFACTURER. EC TO COORDINATE WITH THE MANUFACTURER AND MAKE FINAL CONNECTION.
12. DRIVE-THRU ATM: PROVIDE CONDUIT AND WIRING FOR ATM. REFER TO ELECTRICAL FLOOR PLAN ON SHEET E-500 FOR ADDITIONAL INFORMATION.
13. MONUMENT SIGN POWER: COORDINATE EXACT LOCATION OF SIGNAGE STUB-UP WITH SIGN VENDOR AND MAKE FINAL ELECTRICAL CONNECTIONS. PROVIDE 120V, 20A, TOGGLE SWITCH IN METALLIC BELL BOX WITH METALLIC WEATHERPROOF COVER IF DISCONNECT IS NOT FURNISHED WITH MONUMENT SIGN. COORDINATE EXACT LOCATION WITH CIVIL DRAWINGS.

SAFETY SWITCH, 30A, 3 POLE, FUSED@ 20A	NAN EA
120V, 20A TOGGLE SWITCH IN METALLIC BELL BOX W/ METALLIC...	1.0 EA
120V, 20A GFCI WEATHER RESISTANT DUPLEX RECEPTACLE	1.0 EA
DDCV HOT BOX	1.0 EA
IRRIGATION BACKFLOW	1.0 EA
(2) 4"DIA CONDUIT	71.5 FT
JUNCTION BOX	4.0 EA
STUBOUT & TERMINATE PER UTILITY COMPANY REQUIREMENT...	1.0 EA
(2) 5"DIA CONDUIT	11.4 FT
TRANSFORMER SLABBOX W/ TRAFFIC GUARD	1.0 EA
(2) 2"DIA CONDUIT	61.8 FT
ELECTRIC UTILITY METER	1.0 EA
SERVICE DISCONNECT SWITCH	1.0 EA

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL SITE PLAN AND REMOTE DRIVE THRU

Sheet Number:
E-010

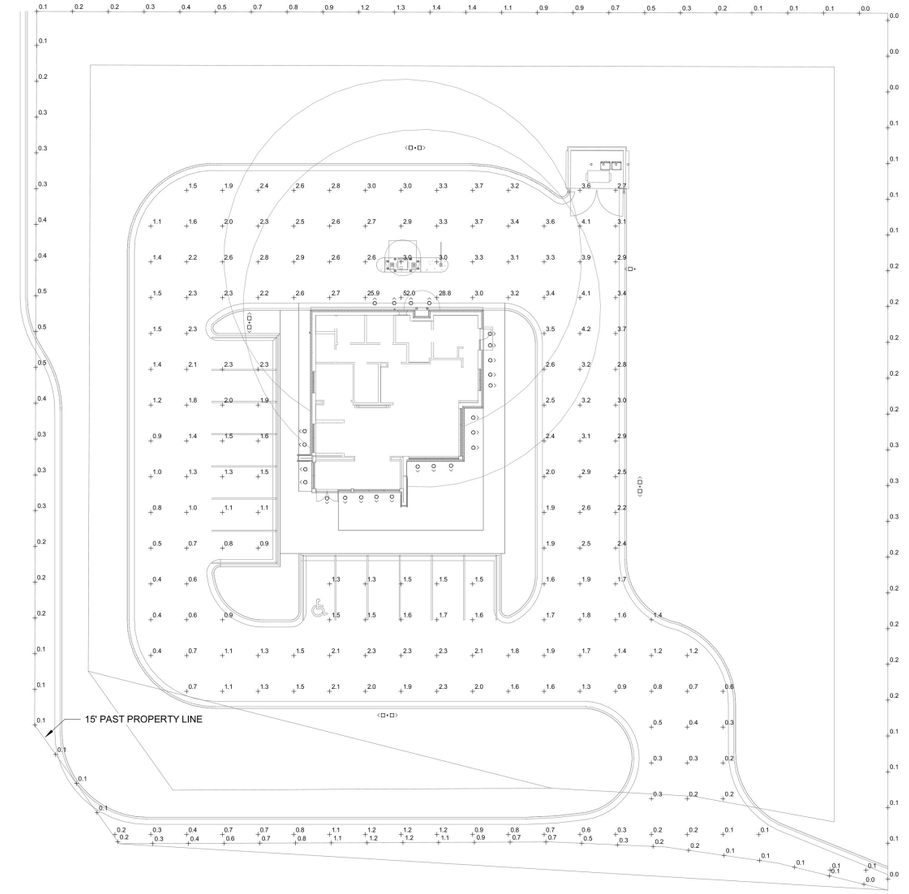

1 E-011 ELECTRICAL PHOTOMETRIC SITE PLAN AT GRADE
1" = 20'-0"

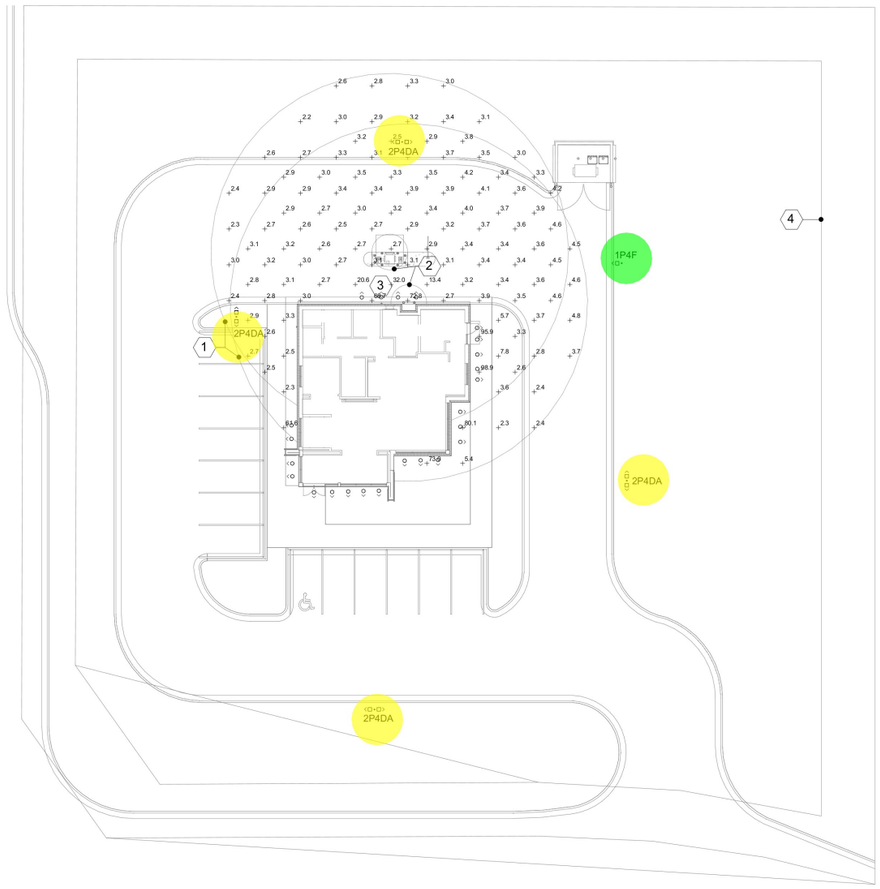

2 E-011 ELECTRICAL PHOTOMETRIC SITE PLAN AT 3'-0"
1" = 20'-0"

LIGHTING STANDARD:

MINIMUM STANDARD

REGULATED STATES: ALABAMA, CALIFORNIA, CONNECTICUT, DISTRICT OF COLUMBIA, FLORIDA, GEORGIA, ILLINOIS, KANSAS, KENTUCKY, LOUISIANA, MARYLAND, MASSACHUSETTS, MISSOURI, MONTANA, NEVADA, NEW HAMPSHIRE, NEW JERSEY, NEW YORK, OREGON, RHODE ISLAND, TEXAS, VIRGINIA, WASHINGTON, VIRGINIA**.

A. BANKING CENTERS IN VIRGINIA MUST COMPLY WITH ALL HOME STATE LAWS AND IS CONSIDERED REGULATED IF THE BANK HEADQUARTERS ARE LOCATED IN A REGULATED STATE.

- A MINIMUM OF TEN (10) FOOT CANDLE POWER AT THE FACE OF THE ATM OR AFTERHOUR DEPOSITORY EXTENDING OUTWARD FIVE (5) FEET IN ALL UNOBSTRUCTED DIRECTIONS.
- A MINIMUM OF TWO (2) FOOT CANDLE POWER EXTENDING OUTWARDS IN ALL UNOBSTRUCTED DIRECTIONS FIFTY (50) FEET FROM THE FACE OF THE ATM AND AFTERHOUR DEPOSITORY.
- A MINIMUM OF TWO (2) FOOT CANDLE POWER IN DEFINED PARKING AREAS WITHIN SIXTY (60) FEET OF THE ATM AND AFTERHOUR DEPOSITORY. IN THE EVENT THE ATM OR AFTERHOUR DEPOSITORY IS LOCATED WITHIN TEN (10) FEET OF THE CORNER OF THE BUILDING AND IS GENERALLY ACCESSIBLE FROM THE ADJACENT SIDE, THERE SHALL BE A MINIMUM OF TWO (2) FOOT CANDLE POWER ALONG THE FIRST FORTY (40) UNOBSTRUCTED FEET OF THE ADJACENT SIDE OF THE BUILDING.
- IF THE ATM OR AFTERHOUR DEPOSITORY IS LOCATED INSIDE A ACCESSIBLE VESTIBULE DURING ANY HOURS OF DARKNESS, A MINIMUM OF 10 FOOT CANDLE POWER AT THE FACE OF THE ATM OR AFTERHOUR DEPOSITORY EXTENDING OUTWARD FIVE (5) FEET IN ALL UNOBSTRUCTED DIRECTIONS. THERE WILL BE A MINIMUM OF TWO (2) FOOT CANDLE POWER AT THE INSIDE OF THE VESTIBULE ENTRY/EXIT DOOR(S). A MINIMUM OF TWO (2) FOOT CANDLE POWER EXTENDING OUTWARDS IN ALL UNOBSTRUCTED DIRECTIONS FIFTY (50) FEET FROM THE VESTIBULE ENTRY/EXIT DOOR. A MINIMUM OF TWO (2) FOOT CANDLE POWER IN DEFINED PARKING AREAS WITHIN SIXTY (60) FEET OF THE VESTIBULE ENTRY/EXIT DOOR. IN THE EVENT THE VESTIBULE ENTRY/EXIT DOOR IS LOCATED WITHIN TEN (10) FEET OF THE CORNER OF THE BUILDING AND IS GENERALLY ACCESSIBLE FROM THE ADJACENT SIDE, THERE SHALL BE A MINIMUM OF TWO (2) FOOT CANDLE POWER ALONG THE FIRST FORTY (40) UNOBSTRUCTED FEET OF THE ADJACENT SIDE OF THE BUILDING. IN URBAN SETTINGS FOR WHICH THERE IS NO DEFINED BANK PARKING AND THE ONLY ACCESS AREA IS A PUBLIC SIDEWALK, A MINIMUM 2 FOOT CANDLE POWER SHALL BE FOR THE FIRST 5 UNOBSTRUCTED FEET FROM THE DOOR. THE MINIMUM FOOT CANDLE READING WILL ALSO BE LIMITED TO BANK CONTROLLED PROPERTY LINES.
- A MINIMUM OF TWO (2) FOOT CANDLE POWER IN THE IMMEDIATE AREA OF THE DESIGNATED ASSOCIA[illegible] E ENTRANCE/EXIT TO THE EACH DAY.
- [illegible] ARE TO BE TAKEN AT 36 INCHES ABO[illegible] AL PLANE, UNLESS OTHERWISE LAW OR REGULATION (3/07).
- CO[illegible] OVERALL RESPONSIBILITY OF ENSURI[illegible] AINS IN COMPLIANCE. THIS [illegible] UNLESS A GREATER STANDARD IS REQUIRED BY [illegible] E JURISDICTION.

CALCULATION SUMMARY AT 36" AFG

LABEL	CALCTYPE	UNIT	AVG	MAX	MIN	AVG/MIN	MAX/MIN
DRIVEUP VAT 5FT COMPLIANCE	LUMINANCE	FC	PROVIDE BY OTHERS				
DRIVEUP VAT 50FT COMPLIANCE	LUMINANCE	FC	7.8	52.0	2.3	34.8:1	34.8:1
DRIVEUP ATM 5FT COMPLIANCE	LUMINANCE	FC	PROVIDE BY OTHERS				
DRIVEUP ATM 50FT COMPLIANCE	LUMINANCE	FC	8.3	98.9	2.2	3.8:1	45.0:1

SHEET NOTES:

1. PHOTOMETRY CALCULATION:PHOTOMETRIC VALUES SHOWN HEREIN ARE INTENDED FOR DESIGN AND EVALUATION PURPOSES ONLY.THE CALCULATED POINT BY POINT VALUES SHOWN ON THIS SHEET ARE BASED ON A COMPUTER LIGHTING PROGRAM WITH APPROXIMATED PARAMETERS. AS A RESULT, PHOTOMETRIC VALUES MAY VARY FROM ACTUAL FIELD MEASUREMENTS.

KEYED NOTES:

1 ATM/VTM FIVE FOOT COMPLIANCE AREA: A MINIMUM OF TEN (10) FOOT CANDLE POWER AT THE FACE OF THE ATM/AFTERHOUR DEPOSITORY EXTENDING OUTWARD FIVE (5) FEET IN ALL UNOBSTRUCTED DIRECTIONS TO BE PROVIDED BY OWNER'S PREMANUFACTURED ATM CANOPY.

2 ATM/VTM FIFTY FOOT COMPLIANCE AREA: A MINIMUM OF TWO (2) FOOT CANDLE POWER EXTENDING OUTWARD IN ALL UNOBSTRUCTED DIRECTIONS FIFTY (50) FEET FROM THE FACE OF THE ATM AND AFTERHOUR DEPOSITORY.

3 AFTERHOUR DEPOSITORY SIXTY FOOT COMPLIANCE AREA: A MINIMUM OF TWO (2) FOOT CANDLE POWER EXTENDING OUTWARD IN ALL UNOBSTRUCTED DIRECTIONS SIXTY (60) FEET FROM THE FACE OF THE ATM AND AFTERHOURDEPOSITORY.

4 BANK CONTROLLED PROPERTY LINES: THE MINIMUM FOOT CANDLE READING WILL BE LIMITED TO BANK CONTROLLED PROPERTY LINES.

LIGHTING FIXTURE SCHEDULE (EXTERIOR)

LABEL	DESCRIPTION	LIGHT FIXTURE		MOUNTING	QTY. OF LAMPS	VOLTS	WATTS
		MFG.	MODEL NUMBER				
1P4F	LED FULL CUTOFF AREA LUMINAIRE, 15000 LUMENS,FORWARD DISTRIBUTION, ALUMINUM HOUSING, UL LISTED FOR WET LOCATION. 1HEAD	GE/LSI (POLE)	FIXTURE: EALS 04 2 F4 AF 7 40 X D D 1 DKBZ POLE: 4SQB5 S07G ** S BRZ 4BC 27'-6"	POLE MOUNT, **SEE DETAIL FOR POLE HEIGHT	LED	120-277	116
2P4DA	LED FULL CUTOFF AREA LUMINAIRE, 10000 LUMENS,FORWARD DISTRIBUTION, ALUMINUM HOUSING, UL LISTED FOR WET LOCATION. 2HEAD, 180° CONFIGURATION	GE/LSI (POLE)	FIXTURE: EALS 04 2 D4 AF 7 40 X D D1 DKBZ POLE: 4SQB5 S07G ** D180 BRZ 4BC 27'-6"	POLE MOUNT, **SEE DETAIL FOR POLE HEIGHT	LED	120-277	140

1P4F LIGHT 1.0 EA
2P4DA LIGHT 4.0 EA

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL PHOTOMETRIC SITE PLAN

Sheet Number:
E-011

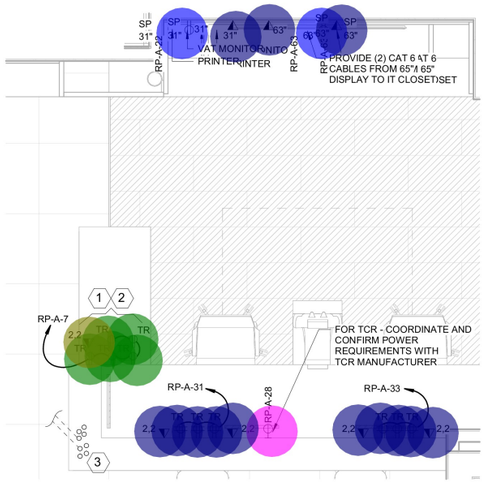

NOTE:

COORDINATE LOCATION OF ALL ELECTRICAL DEVICES WITH ARCHITECTURAL MILLWORK.

2 ELECTRICAL - POWER ENLARGED PLAN - TRANSACTION BAR1
E-100 1/2" = 1'-0"

TRANSACTION BAR KEYED NOTES:

1. ALL RECEPTACLES AND DATA AT TRANSACTION BAR, BELOW COUNTERHEIGHT, SHALL HAVE BLACK COVER PLATES AND OUTLETS U.O.N. COORDINATE DEVICE LOCATIONS WITH MILLWORK PROVIDER AND ARCHITECT. BOX ROUGH OPENINGS SHALL BE CUT BY THE MILLWORK PROVIDER.
2. E.C. TO COORDINATE WITH MILLWORK PROVIDER FOR EXACT LOCATIONS. PROVIDE OUTLETS WITHIN MILLWORK POCKET.
3. TRANSACTION BAR CONDUITS: PROVIDE FOUR (4) 3/4" CONDUITS FOR POWER AND (4) FOUR 2" CONDUITS FOR TELE/DATA FROM UNDER SLAB WITH CONDUIT BUSHINGS AND PULL STRINGS. COORDINATE WITH ARCHITECT AND MILLWORK VENDOR FOR EXACT STUB-UP LOCATIONS PRIOR TO ROUGH-IN. CONDUITS SHALL BE SEALED TO PREVENT RODENT INTRUSION.

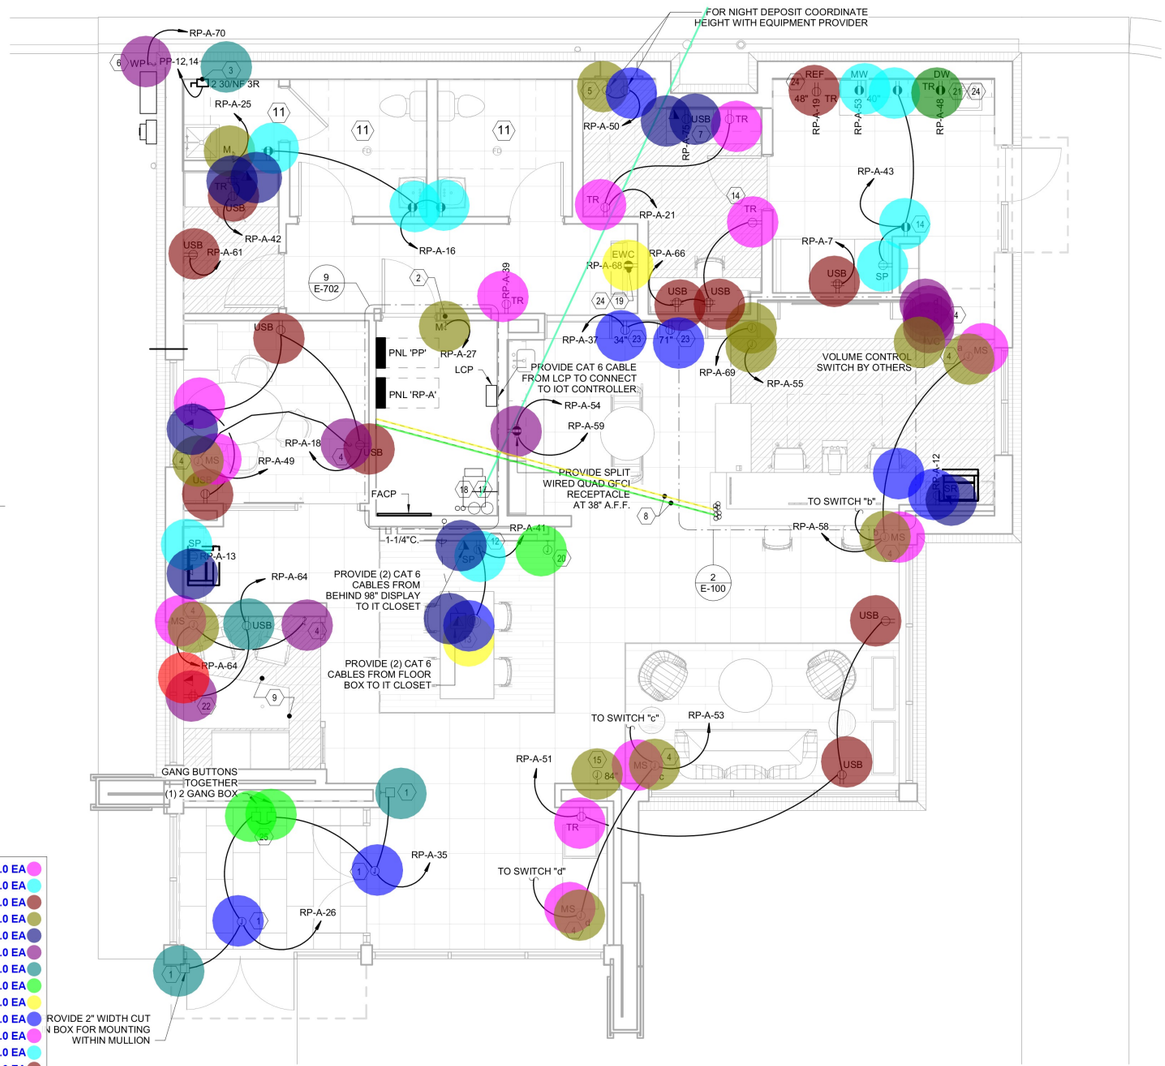

ELECTRICAL POWER & AUXILIARY PLAN
1/2" = 1'-0"

QUAD RECEPTACLE 20A, 125V	1.0 EA
DUPLEX RECEPTACLE, SURGE PROTECTIVE (LEVITON T5380W) 20A, 125V	3.0 EA
USB DUPLEX RECEPTACLE, 20A, 125V	7.0 EA
JUNCTION BOX	9.0 EA
COMBINATION DATA OUTLET	14.0 EA
SINGLE SWITCH, 120/277V, TOOGLE TYPE	6.0 EA
PUSH BUTTON W/ 2"W CUTIN BOX	2.0 EA
PUSH BUTTON W/ GANG DOOR PUSH PLATE & ELECTRIC BOX FOR PUSH PLATE	2.0 EA
RECESSED FLOOR BOX LEGRAND WIREMOLD #RFBA4C300G, RFBADP, RFBA24C4EXT,...	1.0 EA
DUPLEX RECEPTACLE, 20A, 125V	6.0 EA
TEMPER RESISTANT DUPLEX RECEPTACLE, 20A, 125V	5.0 EA
GFCI DUPLEX RECEPTACLE, 20A, 125V	6.0 EA
QUAD RECEPTACLE, 20A, 125V	3.0 EA
TEMPER RESISTANT GFCI DUPLEX RECEPTACLE, 20A, 125V	NAN EA
MOTOR RATED SINGLE SWITCH, 120/277V, TOOGLE TYPE	2.0 EA
TAMPER RESISTANT QUAD RECEPTACLE, 20A, 125V	7.0 EA
WEATHERPROOF SINGLE SWITCH, 120/277V, TOOGLE TYPE	1.0 EA
20/2 NF DISCONNECT SWITCH	1.0 EA
(4) 3/4"DIA IMC CONDUIT	19.6 FT
(4) 2"DIA IMC W/ STRING CONDUIT	19.5 FT
SIMPLEX LEFT RECEPTACLE, 20A, 125V	1.0 EA
TAMPER RESISTANT DUPLEX RECEPTACLE, 20A, 125V W/ BLACK COVER PLATE	5.0 EA
COMBINATION DATA OUTLET W/ BLACK COVER PLATE	1.0 EA
JUNCTION BOX W/ 2"W CUTIN BOX	2.0 EA
MOTION SENSOR, ASSUMED	6.0 EA
DRIVE THRU ALERT LIGHT	1.0 EA
TEMPER RESISTANT DUPLEX RECEPTACLE, 20A, 125V- PROVIDE FACTORY ENGRAVED...	1.0 EA
TEMPER RESISTANT GFCI DUPLEX RECEPTACLE, 20A, 125V	1.0 EA
4" SQUARE JUNCTION BOX	1.0 EA
USB DUPLEX RECETACLE, 20A, 125V	1.0 EA
20A, 125V QUAD RECEPTACLE W/ BLACK DEVICE & COVER PLATES	2.0 EA
USB DUPLEX RECEPTACLE, 20A, 125V W/ BLACK DEVICE & COVER PLATES	1.0 EA
COMBINATION DATA OUTLET W/ BLACK DEVICE & COVER PLATE	1.0 EA
JUNCTION BOX W/ DOUBLE GANG, DEEP JBOX	1.0 EA
(2) 4"DIA CONDUIT	30.2 FT
(2) 2"DIA CONDUIT	30.2 FT
GFCI DUPLEX RECEPTACLE, 20A, 125V- PROVIDE FACTORY ENGRAVED COVER PLATE ...	1.0 EA
DUPLEX RECEPTACLE, 20A, 125V W/ COVER PLATE	2.0 EA
VOLUMN CONTROL SWITCH BY OTHERS, GC TO INSTALL ONLY	1.0 EA

AUXILIARY - GENERAL NOTES:

1. ALL LOW VOLTAGE CONDUITS AND CABLING INCLUDING TELEPHONE, DATA, FIRE ALARM, AUXILIARY, ETC. SHOWN ON THESE PLANS ARE BY THE CONTRACTOR. SEE SHEET E001 "TELDATA" FOR ALL REQUIREMENTS.
2. ALL LOW VOLTAGE CABLES ABOVE ACCESSIBLE CEILING SHALL BE SUPPORTED WITH METALLIC JHOOKS FROM DEVICE LOCATIONS BACK TO THE TBB. WHERE CABLES ARE NOT ACCESSIBLE OR CONCEALED IN WALLS, THEY SHALL BE RUN IN EMT CONDUIT. JHOOKS SHALL BE SPACED SO THAT NO CABLE IS UNSUPPORTED FOR MORE THAN 5'0".

KEYED NOTES:

1. FOR POWER TO DOOR MOTOR AND DOOR PUSH PLATE. COORDINATE LOCATION OF DOOR POWER. PROVIDE 2" WIDTH CUTIN BOX FOR ALL PUSH PLATE MOUNTING WITHIN MULLION. VERIFY ALL REQUIRED CONNECTIONS PRIOR TO ROUGHIN.
2. FOR CONDENSATE PUMP.
3. 30/2 NF DISCONNECT FOR 2KW WATER HEATER, SEE RISER DIAGRAM.
4. RAISE/LOWER SWITCH FOR MECHOSHADES - COORDINATE LOCATION WITH ARCHITECT. THE INTERNET OF TEAM, LLC (IOT) WILL PROVIDE LOW VOLTAGE RAISE/LOWER SWITCHES, LINE VOLTAGE RELAY / MOTOR CONTROLLERS, THE SHADE SOLAR CONTROLLER (INTEGRAL AND PRE-INSTALLED INSIDE LCP) FOR THE ELECTRICAL CONTRACTOR (EC) TO INSTALL. IOT WILL PROVIDE MULTI GANG SWITCH OVER PLATES WHERE SHOWN AS GANGED SWITCH AND COVER PLATE SHALL BE BLACK WITHIN THE BOOTHS. EC SHALL PROVIDE WIRE, CONDUIT, AND ANCILLARY ITEMS NECESSARY TO INSTALL THE SYSTEM. TO COMPLETE THE SHADE CONTROL SYSTEM THE EC MUST PARTICIPATE IN POINT-TO-POINT COMMISSIONING AND RECEIVE SIGN-OFF WITH AN AGENT FROM IOT. REFERENCE IOT SHOP DRAWINGS FOR REQUIRED WIRE SPECIFICATIONS. REFERENCE IOT SHOP DRAWINGS FOR SHADE SYSTEM CONTROL DESIGN DETAILS AND INSTALLATION PROCEDURES. REFERENCE NEC AND LOCAL REQUIREMENTS FOR CONDUIT, FITTINGS, AND FIXTURES FOR CODE COMPLIANCE. COORDINATE ALL REQUIREMENTS WITH ARCHITECT, MECHOSHADE VENDOR, AND THE INTERNET OF TEAM, LLC
5. 4" SQUARE JUNCTION BOX MOUNTED ABOVE NIGHT DEPOSITORY WITH 3/4"C.STUBBED ABOVE ACCESSIBLE CEILING FOR ALARM CONNECTION. ELECTRICALCONTRACTOR SHALL MAKE FINAL CONNECTION FROM JBOX TO NIGHT-DEPOSITORY. COORDINATE LOCATION WITH EQUIPMENT VENDOR PRIOR TO ROUGHIN.
6. WP SWITCH FOR DISCONNECTING MEANS OF IRRIGATION CONTROL VERIFY LOCATION PRIOR TO ROUGHIN. SWITCH AND CONTROLLER SHALL BE MOUNTED NEXT TO THE UTILITY METER.
7. USB OUTLET. PROVIDE USB TYPE-A & TYPE-C OUTLET, LEGRAND R26USBACWCCV6, OR EQUAL.
8. TRANSACTION BAR POWER AND DATA STUB-UP. PROVIDE UNDER SLAB CONDUITS AS FOLLOWS: (4) 3/4" IMC FOR POWER AND (4) 2" IMC WITH STRING FOR TELE/DATA TO ELEC/IT ROOM. SEE ENLARGED PLAN FOR DETAILS. ELECTRICAL CONTRACTOR SHALL COORDINATE EXACT LOCATION AND CONNECTION REQUIREMENTS WITH FURNITURE VENDOR AND ARCHITECT PRIOR TO ROUGH-IN.
9. ALL RECEPTACLES AND DATA OUTLETS AT BOOTHS, SHALL HAVE BLACK DEVICES AND COVER PLATES.
10. POWER FOR INDOOR HEAT PUMP UNITS IS DERIVED FROM OUTDOOR HEAT PUMP. ELECTRICAL CONTRACTOR SHALL PROVIDE AND INSTALL CONNECTIONBETWEEN EACH INDOOR AND OUTDOOR UNIT. ELECTRICAL CONTRACTOR SHALL CONNECT DISCONNECT SWITCH PROVIDED BY MECHANICAL FOR EACH UNIT.
11. CONNECT EXHAUST FAN TO LIGHTING CIRCUIT SERVING ROOM. FAN SHALL BE CONTROLLED BY ROOM LIGHT SWITCH.
12. FOR CONNECTION TO VIDEO SIGNAGE DISPLAY MONITORS IN TECH WALL. INDICATED JUNCTION BOXES SHALL BE DOUBLEGANG, DEEP JBOX, EACH WITH 2" EMT STUBBED ABOVE ACCESSIBLE CEILING, PROVIDE BUSHING AND LABELED. CONTRACTOR SHALL COORDINATE EXACT CABLING AND TERMINATIONS WITH VIDEO SIGNAGE PROVIDER AND ARCHITECT. COORDINATE LOCATION OF SIGNAGE PLAYER BOX WITH SIGNAGE PROVIDER. PROVIDE CABLING FROM PLAYER BOX TO DISPLAY MONITORS. VERIFY THATALL CONNECTIONS CAN REACH THE BOXES WHERE THEY ARE TERMINATED AND FED FROM WITHOUT INTERFERING WITH MONITORS. SEE DETAIL 6, SHEET E501 FOR ELEVATIONS.
13. FLOOR BOX - PWR & DATA (RECESSED): PROVIDE RECESSED FLOOR BOX LEGRAND WIREMOLD #RFBA4C300G, RFBADP, RFBA24C4EXT, 2 HUB, RFBA6A, RFBAMAAP, 6CTC2GY (FLANGED COVER FOR CONCRETE FLOORS) WITH 3/4" IMC FOR POWER AND 1-1/4" IMC WITH PULL STRING FOR TELE/DATA TO ELEC/IT ROOM. ELECTRICAL CONTRACTOR SHALL COORDINATE EXACT LOCATION AND CONNECTION REQUIREMENTS WITH FURNITURE VENDOR AND ARCHITECT PRIOR TO ROUGH-IN.
14. FOR MONITOR. COORDINATE EXACT LOCATION, MOUNTING HEIGHT AND CONNECTIVITY WITH ARCHITECT PRIOR TO ROUGHIN. VERIFY MOUNTING WITH ARCHITECT.
15. PROVIDE DRIVE THRU ALERT LIGHT WHERE NOTED. COORDINATE ROUGH-IN REQUIREMENTS AND WIRING.
16. NOT USED.
17. STUB UP (2) 2" CONDUITS FROM VTM/ATM DRIVE THROUGH FOR EQUIPMENT DATA CONNECTION.
18. STUB UP (2) 4" CONDUITS FOR TELEPHONE SERVICE ENTRANCE. SEE SITE PLAN.
19. FOR E.W.C. COORDINATE MOUNTING HEIGHT AND EXACT ROUGH-IN LOCATION WITH PLUMBING FIXTURE SUBMITTAL.
20. PROVIDE RECESSED DOUBLE GANG BOX AND (1) CAT 6 CABLE FROM 7" TOUCHPANEL TO IT CLOSET MOUNT AT 44" TO THE CENTER OF THE BOX A.F.F.CONFIRM TOP OF PANEL IS NOT HIGHER THAN 46" A.F.F. TO THE TOP. THE RECESSED DOUBLE GANG BOX SHALL BE MOUNTED VERTICALLY U.O.N.
21. FOR DISHWASHER MOUNT OUTLET IN THE SPACE ADJACENT TO THE SPACE OCCUPIED BY THE DISHWASHER SO THAT THE FLEXIBLE CORD CAN PASS THROUGH THE OPENING. COORDINATE WITH GC FOR OPENING PLACEMENT
22. INSTALL POWER/DATA RECEPTACLE PER ARCHITECTURAL ELEVATIONS TO AVOID FURNITURE PLACEMENT.
23. RECEPTACLES AND COVER PLATES AT LIBRARY WALL SHALL BE BROWN. INSTALL HORIZONTAL AND COORDINATE WITH ARCHITECT AND REFERENCE ARCHITECTURAL ELEVATION DRAWINGS FOR MORE DETAIL.
24. GFCI PROTECTED CONTROLLED RECEPTACLE: CONTROLLED RECEPTACLE SHALL BE FED FROM A GFCI PROTECTED CIRCUIT BREAKER. PROVIDE FACTORY ENGRAVED COVER PLATE WITH 'GFCI PROTECTED' LABEL
25. 2-GANG DOOR PUSH PLATES. EC SHALL INSTALL AND POWER THE POWER SUPPLY (SUPPLIED BY DOOR COMPANY) ABOVE CEILING AND COORDINATE LOCATION OF DOOR POWER. PROVIDE 2-GANG ELECTRICAL BOX FOR PUSH PLATE. VERIFY ALL REQUIRED CONNECTIONS PRIOR TO ROUGH-IN.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON
1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL POWER & AUXILIARY PLAN

Sheet Number:
E-100

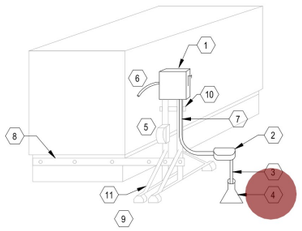

2 E-101 ROOF DISCONNECT MOUNTING DETAIL
N.T.S.

ROOF DISCONNECT MOUNTING DETAILS KEYNOTES:

1. DISCONNECT SWITCH SHALL BE LOCATED ADJACENT TO (NOT ATTACHED TO) EQUIPMENT AND MEET WORKING CLEARANCES.
2. WEATHERPROOF "LB" CONDUIT TO TRANSITION TO LMFC.
3. HVAC EQUIPMENT FEEDER IN IMC CONDUIT.
4. PROVIDE PITCH POCKET FOR ALL CONDUIT PENETRATIONS.
5. WHERE A RECEPTACLE IS SHOWN ON A UNIT, RECEPTACLE OUTLET WITHIN 25 FT. OF EQUIPMENT WITH AN OUTLET BOX HOOD. RECEPTACLE TO BE GFCI PROTECTED.
6. LFMC PER SPECS WITHIN 12" OR LESS OF THE CONNECTION POINT OF THE UNIT.
7. SUPPORT RACEWAY WITH GALVANIZED MULTISTRUT PIPE CLAMP WHERE RUN UP THE UNITSTRUT.
8. ATTACH UNISTRUT TO CURB (NOT EQUIPMENT AND FLASHING). SEAL ALL PENETRATIONS.
9. UV RESISTANT UNISTRUT SUPPORT BASE. TYPICAL.
10. ADDITIONAL UNITSTRUT SUPPORT PERPENDICULAR TO THE UNISTRUT THAT THE DISCONNECT IS ATTACHED TO.
11. UNISTRUT SUPPORT ADDED AT 45 DEGREE ANGLE FOR ADDITIONAL SUPPORT.

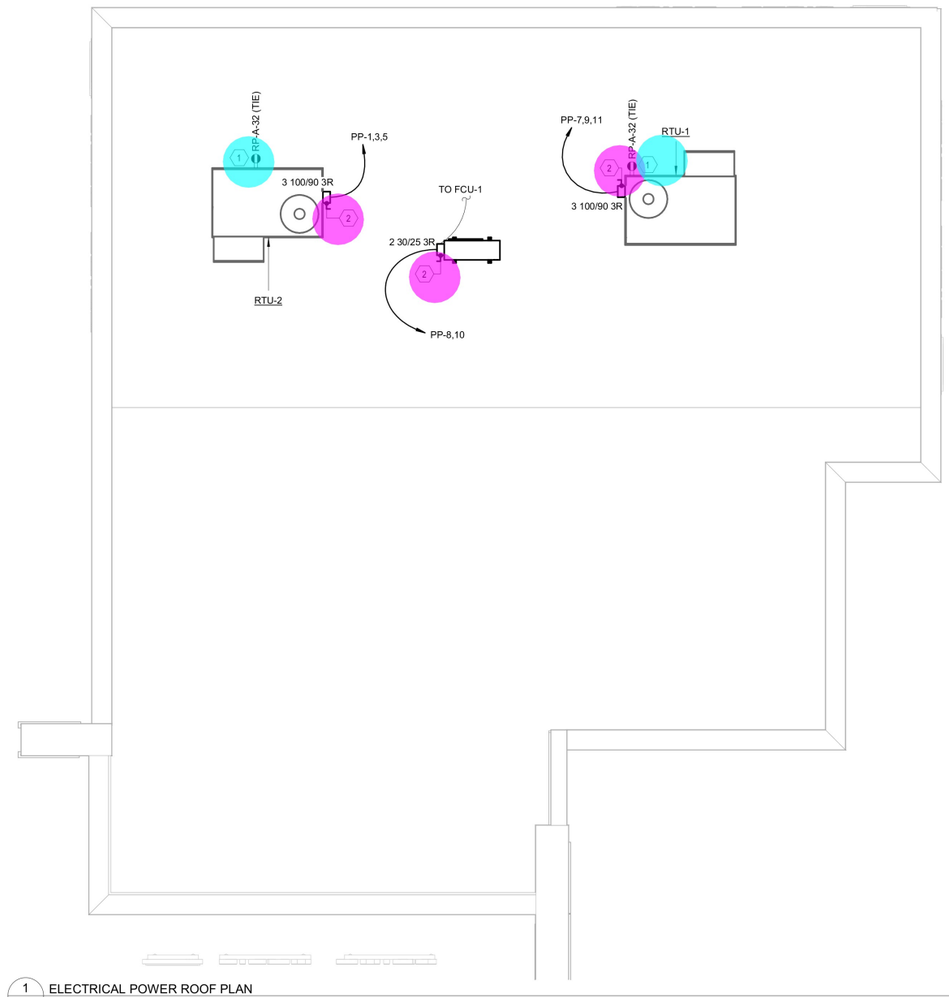

1 E-101 ELECTRICAL POWER ROOF PLAN
1/4" = 1'-0"

SHEET NOTES:

1. EXACT LOCATIONS OF MECHANICAL EQUIPMENT AND THEIR ELECTRICAL CONNECTIONS SHALL BE COORDINATED WITH MECHANICAL CONTRACTOR. ELECTRICAL CONNECTIONS TO ROOF TOP EQUIPMENT SHALL BE ROUTED WITHIN ROOF CURB
2. COORDINATE WITH MECHANICAL CONTRACTOR FOR MECHANICAL EQUIPMENT DISCONNECT SWITCH RESPONSIBILITIES. FINAL ELECTRICAL INSTALLATION AND CONNECTIONS BY ELECTRICAL CONTRACTOR.
3. PROVIDE APPROPRIATE TRIM RING AND 3/4" CONDUIT WITH INSULATED CONDUIT BUSHINGS AND PULL STRING TO ACCESSIBLE CEILING FOR EACH THERMOSTAT. REFER TO MECHANICAL PLAN FOR THERMOSTAT QUANTITIES AND LOCATIONS. IN AREAS WITH OPEN CEILINGS, A COMPLETE CONDUIT SYSTEM SHALL BE PROVIDED FROM THE THERMOSTAT TO THE MECHANICAL UNIT; FREE WIRING IS NOT ACCEPTABLE.
4. ELECTRICAL CONTRACTOR'S BID SHALL INCLUDE POWER TO ALL MISCELLANEOUS MECHANICAL AND PLUMBING EQUIPMENT ACCESSORIES AND AUXILIARY LOADS WHICH MAY NOT BE REFLECTED IN THE ELECTRICAL PLANS BUT NECESSARY FOR A COMPLETE AND FULLY FUNCTIONING SYSTEM. NO CHANGE ORDERS WILL BE CONSIDERED.

KEYED NOTES:

1. MAINTENANCE RECEPTACLE: PROVIDE 20A, 120V GFCI WEATHERPROOF/WEATHER-RESISTANT RECEPTACLE WITH METALLIC WHILE-IN-USE COVER IF NOT PROVIDED BY RTU MANUFACTURER. PROVIDE POWER CONNECTIONS AS REQUIRED BY RTU MANUFACTURER
2. MECHANICAL UNIT DISCONNECT SWITCH: PROVIDE NEMA 3R FUSIBLE DISCONNECT SWITCH. REFER TO "ROOF DISCONNECT MOUNTING DETAIL" ON THIS SHEET FOR MORE DETAILS.

- DISCONNECT SWITCH, PROVIDE NEMA 3R FUSIBLE DISCONNECT SWITCH — 3.0 EA
- GFCI WEATHERPROOF DUPLEX RECEPTACLE, 20A 120V W/ METALLIC COVER — 2.0 EA
- PITCH POCKET — 1.0 EA
- OUTLET BOX HOOD — 1.0 EA

02 PM

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL POWER ROOF PLAN

Sheet Number:
E-101



2 E-130 ELECTRICAL LIGHTING PLAN - BOOTH
1/4" = 1'-0"

LCP SCHEDULE

RELAY NUMBER	PANEL	CIRCUIT NUMBER	DESCRIPTION OF AREA	LOCAL CONTROL
1	RPA	47	CRITICAL LTG CONTACTOR	EXTERIOR OVERRIDE SWITCH
2	RPA	57	NONCRITICAL LTG CONTACTOR	EXTERIOR OVERRIDE SWITCH
3	RPA	44	EXTERIOR SIGNAGE	EXTERIOR OVERRIDE SWITCH
4	RPA	11	EXTERIOR SIGNAGE	EXTERIOR OVERRIDE SWITCH
5	RPA	5	WEATHER VESTIBULE/ENTRY	OVERRIDE SWITCH "a"
6	RPA	8	LIBRARY/TRANSACTION BAR	OVERRIDE SWITCH "b" & ELV DIMMER "b"
7	RPA	8	LIBRARY/TRANSACTION BAR	OVERRIDE SWITCH "i" & ELV DIMMER "i"
8	RPA	9	BANKING LOBBY	OVERRIDE SWITCH "c"
9	RPA	10	VESTIBULE 116 LOCAL	OVERRIDE SWITCH "d"
10	RPA	24	GATHERING AREA	OVERRIDE SWITCH "e"
11	RPA	8	UNDERCOUNTER SERVICE BAR	EXTERIOR OVERRIDE SWITCH "h"
12	RPA	6	EXTERIOR SIGNAGE	EXTERIOR OVERRIDE SWITCH
13	RPA	60	ATM TOPPER LIGHTING	EXTERIOR OVERRIDE SWITCH
14	RPA	3	UPLIGHTS AND PARAPET LIGHTING	EXTERIOR OVERRIDE SWITCH
15	RPA	4	EXTERIOR CANOPY LIGHTING	EXTERIOR OVERRIDE SWITCH

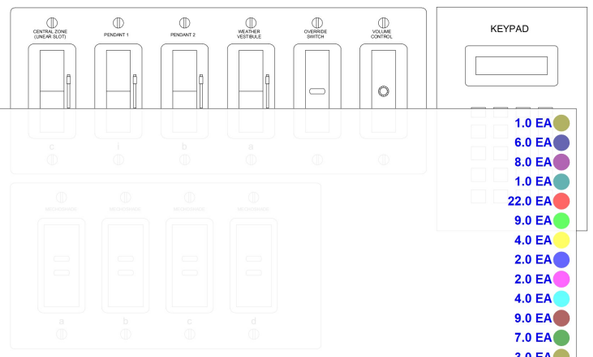

3 E-130 SWITCH BANK DETAIL
N.T.S.

- PB 1.0 EA
- AE 6.0 EA
- A 8.0 EA
- F3 1.0 EA
- G1 22.0 EA
- J 9.0 EA
- JE 4.0 EA
- GEM 2.0 EA
- X2 2.0 EA
- X1 4.0 EA
- TE 9.0 EA
- T 7.0 EA
- B 3.0 EA
- C 53.0 EA
- X3 1.0 EA
- FEM 2.0 EA
- S 2.0 EA
- U1 2.0 EA
- U3 1.0 EA
- L 30.4 FT
- G 26.8 FT
- UC 9.1 FT
- SWITCH BANK FOR SWITCHES 1.0 EA
- LOW VOLTAGE DIMMING OVERRIDE SWITCH W/ COVER PLATE 3.0 EA
- OCCUPANCY SENSOR 10.0 EA
- DISCONNECT SWITCH 3.0 EA
- OPEN/CLOSE GANG SWITCH W/ (1) COVER PLATE FOR BOTH 2.0 EA
- DIMMER SWITCH, 20A, 120/277V 3.0 EA
- LOW VOLTAGE DIMMER SWITCH 2.0 EA
- DIMMABLE POWER PACK LIGHTING CONTROL DEVICE 7.0 EA
- WEATHER PROOF JUNCTION BOX 6.0 EA
- SINGLE SWITCH 20A, 120/277V 2.0 EA
- INTERNET OF TEAM BMS LCP-SA LIGHTING CONTROL PANEL 1.0 EA
- LOW VOLTAGE 2-HOUR MANUAL OVERRIDE SWITCH 1.0 EA
- LOW VOLTAGE 2-HOUR MANUAL OVERRIDE DIMMER SWITCH 1.0 EA
- JUNCTION BOX 1.0 EA
- PHOTOSENSOR 4.0 EA

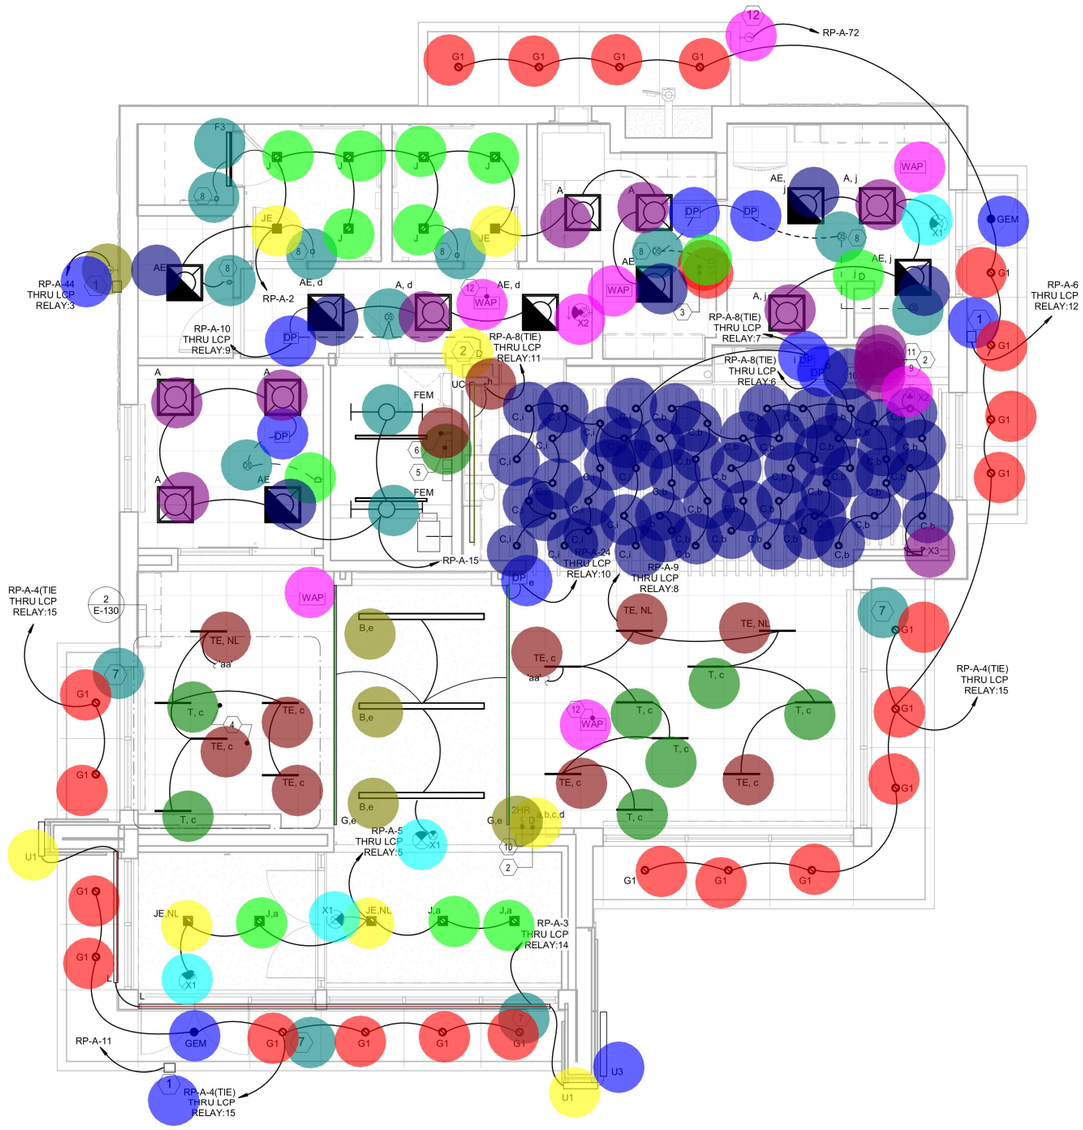

1 E-130 ELECTRICAL POWER & AUXILIARY PLAN
1/4" = 1'-0"

SHEET NOTES:

1. HALF SHADED OR FULLY SHADED LUMINAIRES SHALL BE PROVIDED WITH SELFCONTAINED 90MINUTE BACKUP BATTERY PACKS.
2. EMERGENCY LIGHTING FIXTURES SHALL SWITCH WITH LOCAL NORMAL LIGHTING UNLESS INDICATED AS "EM/NL" OR "NL" (NIGHT LIGHT).
3. EMERGENCY FIXTURES WITH INTEGRAL 90MINUTE BATTERY PACKS SHALL BE PROVIDED WITH AN UNSWITCHED HOT CONDUCTOR SO THAT EMERGENCY BATTERY PACK CAN CHARGE WHEN POWER TO THE LIGHT FIXTURES IS SWITCHED OFF.
4. EXIT AND NIGHT LIGHT FIXTURES SHALL BE CONNECTED TO UNSWITCHE D CIRCUIT AHEAD OF LIGHTING CONTROLLER.
5. THE CIRCUIT NEUTRAL CONDUCTOR SHALL BE ROUTED TO EACH LINE VOLTAGE WALL SWITCH. WHERE THE WIRING DEVICE DOES NOT REQUIRE THE USE OF A NEUTRAL CONDUCTOR, CAP FOR FUTURE USE.
6. LOW VOLTAGE CIRCUITRY IS NOT SHOWN ON THE FLOOR PLANS FOR CLARITY. LOW VOLTAGE CIRCUITRY SHALL BE PROVIDED AND INSTALLED IN ACCORDANCE WITH THE LIGHTING CONTROL VENDOR'S INSTRUCTIONS AND AS REQUIRED BETWEEN ALL LOW VOLTAGE CONTROLS AND FIXTURES.
7. LIGHTING CONTROLS VENDOR SHALL PRODUCE AND SUBMIT JOB SPECIFIC SHOP DRAWINGS SHOWING ALL DEVICE LOCATIONS, SENSOR COVERAGE, AND TERMINALTOTERMINAL WIRING DIAGRAMS SPECIFIC TO THIS PROJECT.

KEYED NOTES:

1. DISCONNECT SWITCH FOR BANK LOGO SIGN. ROUTE 1" C TO PANEL RPA THRU LIGHTING CONTROL PANEL. ELECTRICAL CONTRACTOR SHALL COORDINATE WITH ARCHITECTURAL ELEVATIONS AND SIGNAGE PROVIDER FOR EXACT LOCATION, QUANTITIES AND MOUNTING HEIGHT PRIOR TO ROUGHIN.
2. LOW VOLTAGE ON/OFF/DIMMING OVERRIDE SWITCHES FOR INTERIOR LIGHTING. SWITCH SHALL HAVE THE ABILITY TO TURN THE ZONE ON/OFF DURING PROGRAM "ON" HOURS, HAVE THE ABILITY TO MANUALLY OVERRIDE THE LIGHTS TO BE "ON" FOR TWO HOURS DURING "OFF HOURS",AND HAVE THE ABILITY TO DIM THE LIGHTS.
3. DRIVE THROUGH LANE OPEN/CLOSE GANG SWITCHES. SEE DETAIL 9 ON E-500. COORDINATE PLACEMENT WITH ARCHITECT PRIOR TO ROUGH-IN.
4. FIXTURES "PB" AND "S" SHALL BE MOUNTED AT BOOTH CEILING HEIGHT (SEE BOOTH ENLARGED PLAN). FIXTURES "T" SHALL BE MOUNTED ABOVE BOOTH. SEE ARCHITECTURAL RCP.
5. INTERNET OF TEAM BMS LCP-SA LIGHTING CONTROL PANEL. PANEL HARDWARE IS BY INTERNET OF TEAM AND SHALL BE PREPROGRAMMED PER LCP SCHEDULE. PROVIDE FOUR HOURS FOR INSTALLATION AND COMMISSIONING. PROVIDE AND INSTALL SECONDARY PANEL AS NEED FOR THE NUMBER OF RELAY SPACES.PANEL SHALL HAVE ABILITY TO CONNECT TO BUILDING AUTOMATION SYSTEM.
6. PROVIDE AN OVERRIDE SWITCH FOR TESTING OF EXTERIOR AND SITE LIGHTING. SEE LIGHTING CONTROL SCHEDULE.
7. PROVIDE PHOTOSENSOR TO INTERFACE WITH LCP AND BMS FOR EXTERIOR LIGHTING CONTROL. INSTALL PHOTOSENSOR TO WHERE THE EYE OF THE PHOTOSENSOR FACES DUE NORTH. LOCATE PHOTOSENSOR SOMEWHERE THAT IS EXPOSED TO FULL DAYLIGHT AND IS NOT SHADOWED OR DIRECTLY EXPOSED TO ANY NIGHTTIME ILLUMINATION OR ANY OTHER OBSTRUCTIONS.
8. SET LIGHT CONTROLS FOR "OCCUPANCY SENSOR" MODE, TO TURN LIGHTS ON WHEN OCCUPANCY DETECTED.
9. LOW VOLTAGE ON/OFF OVERRIDE SWITCHES FOR TRANSACTION BAR/ LIBRARYLIGHTING. SWITCH SHALL HAVE THE ABILITY TO TURN THE ZONE ON/O FF DURING PROGRAM "ON" HOURS AND HAVE THE ABILITY TO MANUALLY OVERRIDE THE LIGHTS TO BE "ON" FOR TWO HOURS DURING "OFF HOURS". PROVIDE LINE VOLTAGE ELV DIMMER SEPARATELY AS SHOWN.
10. LOW VOLTAGE 2HOUR MANUAL OVERRIDE SWITCH FOR MULTIZONES. LABEL EACH BUTTON WITH ITS RESPECTIVE ROOM/AREA. SWITCH SHALL HAVE ABILITY MANUALLY OVERRIDE THE LIGHTS TO BE "ON" FOR TWO HOURS DURING "OFF HOURS".
11. SWITCH BANK: REFER TO SWITCH BANK DETAIL THIS SHEET AND ELEVATION #3 ON SHEET E-703
12. PROVIDE WEATHER PROOF JUNCTION BOX FOR OPEN/CLOSE SIGN. COORDINATE FINAL LOCATION WITH ARCHITECT.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL LIGHTING PLAN

Sheet Number:
E-130

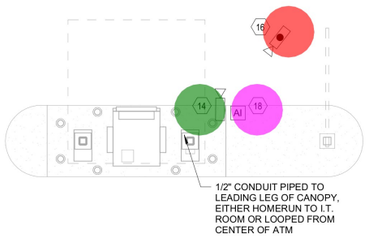

2 E-150 SECURITY PLAN REMOTE DRIVE THRU
1/4" = 1'-0"

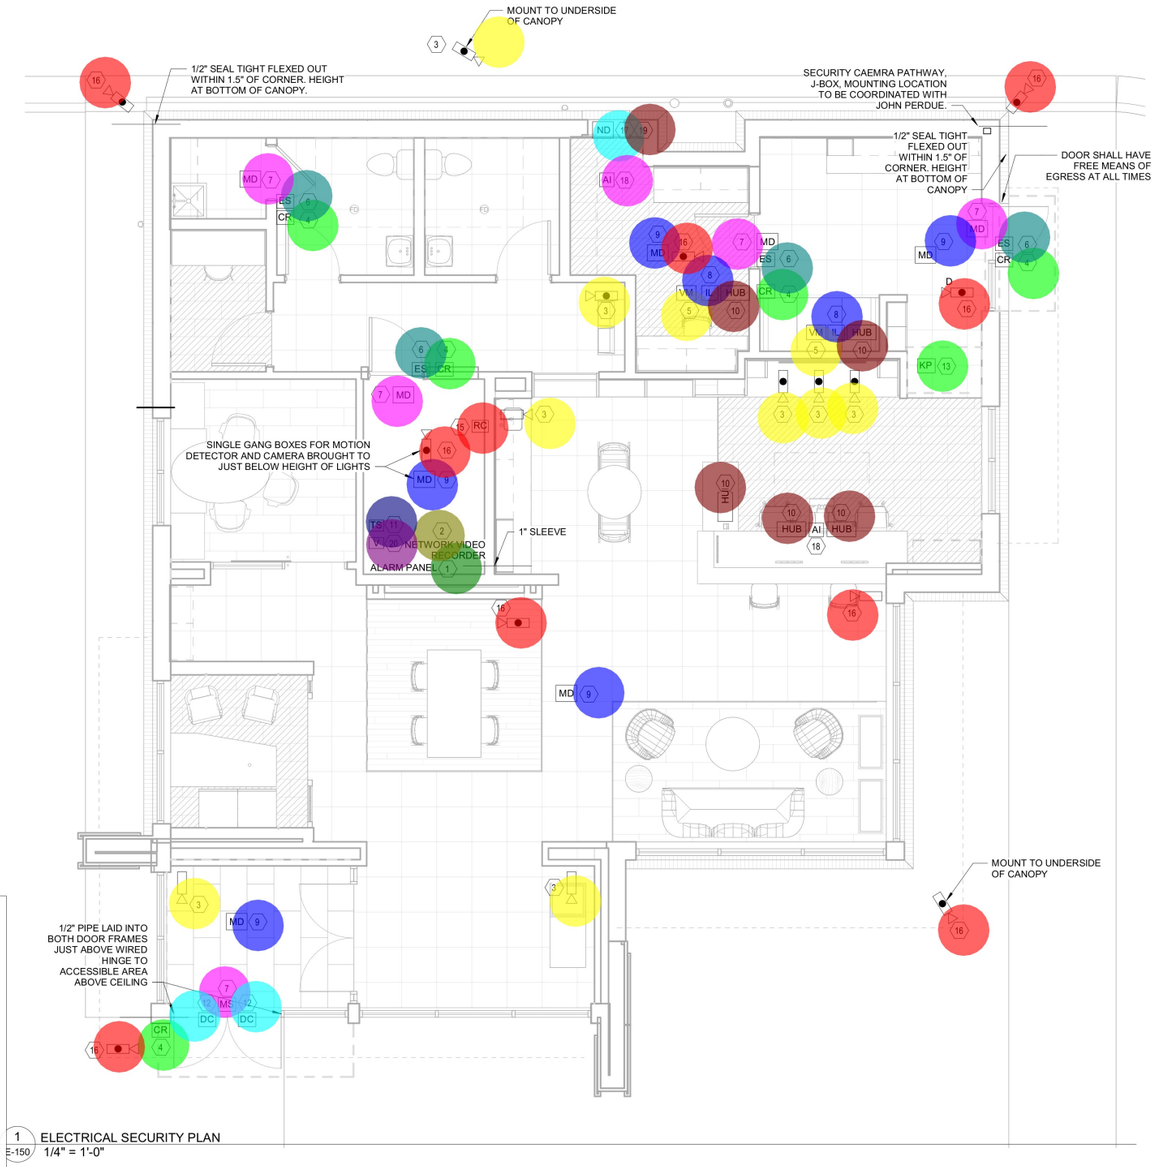

1 E-150 ELECTRICAL SECURITY PLAN
1/4" = 1'-0"

16	10.0 EA
4	5.0 EA
3	8.0 EA
9	5.0 EA
7	5.0 EA
12	2.0 EA
10	5.0 EA
1	1.0 EA
2	1.0 EA
11	1.0 EA
20	1.0 EA
6	4.0 EA
15	1.0 EA
13	1.0 EA
5	2.0 EA
8	2.0 EA
18	2.0 EA
17	1.0 EA
19	1.0 EA
14	1.0 EA
RFI: Per Sheet Notes 1 and 4, se...	1.0 EA

SHEET NOTES:

1. SECURITY DEVICES SHOWING ON THIS SHEET IS FOR COORDINATION PURPOSES ONLY. REFER TO SECURITY DRAWING FOR FINAL LOCATION AND REQUIREMENTS AND PROVIDE ACCORDINGLY.
2. ELECTRICAL CONTRACTOR SHALL PROVIDE ALL RACEWAYS, BOXES, PULLSTRINGS, ETC. SECURITY CABLING SHALL BE BY SECURITY VENDOR.
3. "RED" COLORED WIRE TO BE RESERVED FOR FIRE SYSTEMS AND "YELLOW" WIRES TO BE RESERVED FOR SECURITY SYSTEMS.
4. NOT ALL DEVICES MAY BE USED**
5. ALL CABLES SHALL BE PLENUM RATED
6. SUPPORT DATA / VOICE CABLES ON JHOOKS, 6' O.C., BACK TO THE SECURITY PANEL
7. PROVIDE 3/4" EMT CONDUIT WITH 3/4" BUSHING STUBBED UP TO ACCESSIBLE CEILING AND A 2 GANG BACKBOX FOR THE FOLLOWING: EACH ALARM ACTIVATING DEVICE; EXTERIOR ATM AND / OR NIGHT DEPOSIT; CCTV; CARD READERS; ALL WALL MOUNTED DEVICES.
8. PROVIDE 3/4" C. TO KNOX BOX AND STUB ABOVE TO NEAREST ACCESSIBLE CEILING.
9. ALL EXTERIOR CAMERAS SHALL HAVE A 3/4"C. STUBBED BACK TO THE NEAREST ACCESSIBLE CEILING.
10. ALL EXTERIOR CAMERAS SHALL BE INSTALLED BELOW THE CANOPIES TO MAXIMIZE CAMERA SIGHT LINES CONFIRM FINAL LOCATION WITH SECURITY VENDOR
11. ALL DOORS SHALL HAVE FREE EGRESS. COORDINATE WITH ARCHITECTURAL DOOR HARDWARE.
12. EXTERIOR JUNCTION BOX TO MOUNTED FOR 360 CAMERA TO BE INSTALLED AT CORNERS OF THE BUILDING.

SECURITY DEVICE SCHEDULE

#	DESCRIPTION	WIRE (FOR REFERENCE SEE NOTE A)	INSTALLATION REQUIREMENTS
1	ALARM PANEL	(4) 110VAC DUPLEX	(4) DUPLEX OUTLETS MOUNTED VERTICALLY FROM 6' TO 4' NEXT TO SECURITY PANELS. FIELD VERIFY LOCATION.
2	NETWORK VIDEO RECORDER	(1) 110VAC QUAD	QUAD OUTLET ADJACENT TO DATA RACK. EXACT LOCATION TBD BY SITE.
3	IP DOME CAMERA - INDOOR	CAT6	SINGLE GANG BOX, 2-3/4" ROUND MUD RING, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING. SEE ELEVATION FOR AFF HEIGHT. NO PROVISIONS REQUIRED FOR MOUNTING ON DROP-IN CEILING.
4	CARD READER	22/3 PAIR IN BANANA CABLE	SINGLE GANG BOX, 44" AFF, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING, FLEX FROM BOTTOM OF BOX TO ELECTRIC STRIKE. PROVIDE SLIM/MULLION METAL BACK BOX FOR MOUNTING ON MULLION.
5	VIDEO MONITOR	110VAC OUTLET, RG59 COAX	SINGLE GANG BOX, 86" AFF, SERIALLY PIPED WITH HUB AND IL, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING.
6	ELECTRIC STRIKE WITH LBM	18/4 IN BANANA CABLE	WIRING FROM CARD READER.
7	MOTION DETECTOR (TO SHUNT DOOR CONTACT)	22/4 BANANA CABLE	SINGLE GANG BOX MOUNTED LONG SIDE PARALLEL TO DOOR(S) WITH RING, SEE ELEVATION FOR HEIGHT, NO PROVISIONS REQUIRED FOR MOUNTING ON DROP-IN CEILING TILES.
8	ALARM LAMP/INDICATOR LIGHT	18/2	SINGLE GANG BOX WITH RING, 60" AFF, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING.
9	360 MOTION DETECTOR	22/4	SINGLE GANG BOX WITH ROUND MUD RING IN CEILING, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING, NO PROVISIONS REQUIRED FOR DROP-IN TILE CEILINGS.
10	HOLD UP BUTTON	22/4	FOR TELLER LINE, STUB CONDUIT AT 18" AFF UNDER COUNTERTOP WITH STUB UP INTO ACCESSIBLE AREA ABOVE CEILING. FOR CASH/BREAK ROOMS, SINGLE GANG BOX WITH RING, 44" AFF WITH STUB UP INTO ACCESSIBLE AREA ABOVE CEILING. FOR OFFICE DESK LOCATIONS, SINGLE GANG BOX WITH RING, 18" AFF ON WALL ADJACENT TO DESK WITH STUB UP INTO ACCESSIBLE AREA ABOVE CEILING.
11	TEMPERATURE SENSOR	22/4	FOR ATM ROOM, SINGLE GANG BOX WITH RING, 60" AFF, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING. FOR IT ROOMS, NO PROVISIONS REQUIRED.
12	DOOR CONTACT	22/2 IN BANANA CABLE	1/2" PIPE LAID INTO BOTH DOOR FRAMES JUST ABOVE WIRED HINGE INTO ACCESSIBLE AREA ABOVE CEILING.
13	ALARM KEYPAD	22/4	SINGLE GANG BOX WITH RING, 44" AFF, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING.
14	ANALOG MINIATURE BOARD CAMERA	CAT6	SINGE GANG BOX WITH RING, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING. SEE ELEVATION FOR HEIGHT.
15	ROOF CONTACT	22/4	NO PROVISIONS REQUIRED.
16	360 IP DOME CAMERA	CAT6	SINGLE GANG BOX WITH 2-3/4" ROUND MUD RING, 8'-6" AFF OR TO CEILING FOR CEILING OR CANOPY MOUNT, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING. NO PROVISIONS REQUIRED FOR MOUNTING ON DROP-IN CEILING TILES.
17	IP MINIATURE BOARD CAMERA	CAT6	SINGLE GANG BOX WITH RING, 74" AFF, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING. SEE ELEVATION FOR HEIGHT.
18	ALARM INTERFACE	22/8	SINGLE GANG BOX WITH RING, STUB UP INTO ACCESSIBLE AREA ABOVE CEILING. HEIGHT TO BE DETERMINED BY SHOP PRINTS PER JOB. NO PROVISIONS REQUIRED FOR VAULT.
19	NIGHT DEPOSIT	110VAC	110VAC OUTLET, 74" AFF, ADJACENT TO CAMERA JBOX. SEE POWER PLAN FOR CIRCUIT.
20	VENUS ROUTER		NO PROVISIONS REQUIRED.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON
1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL SECURITY PLAN

Sheet Number:
E-150

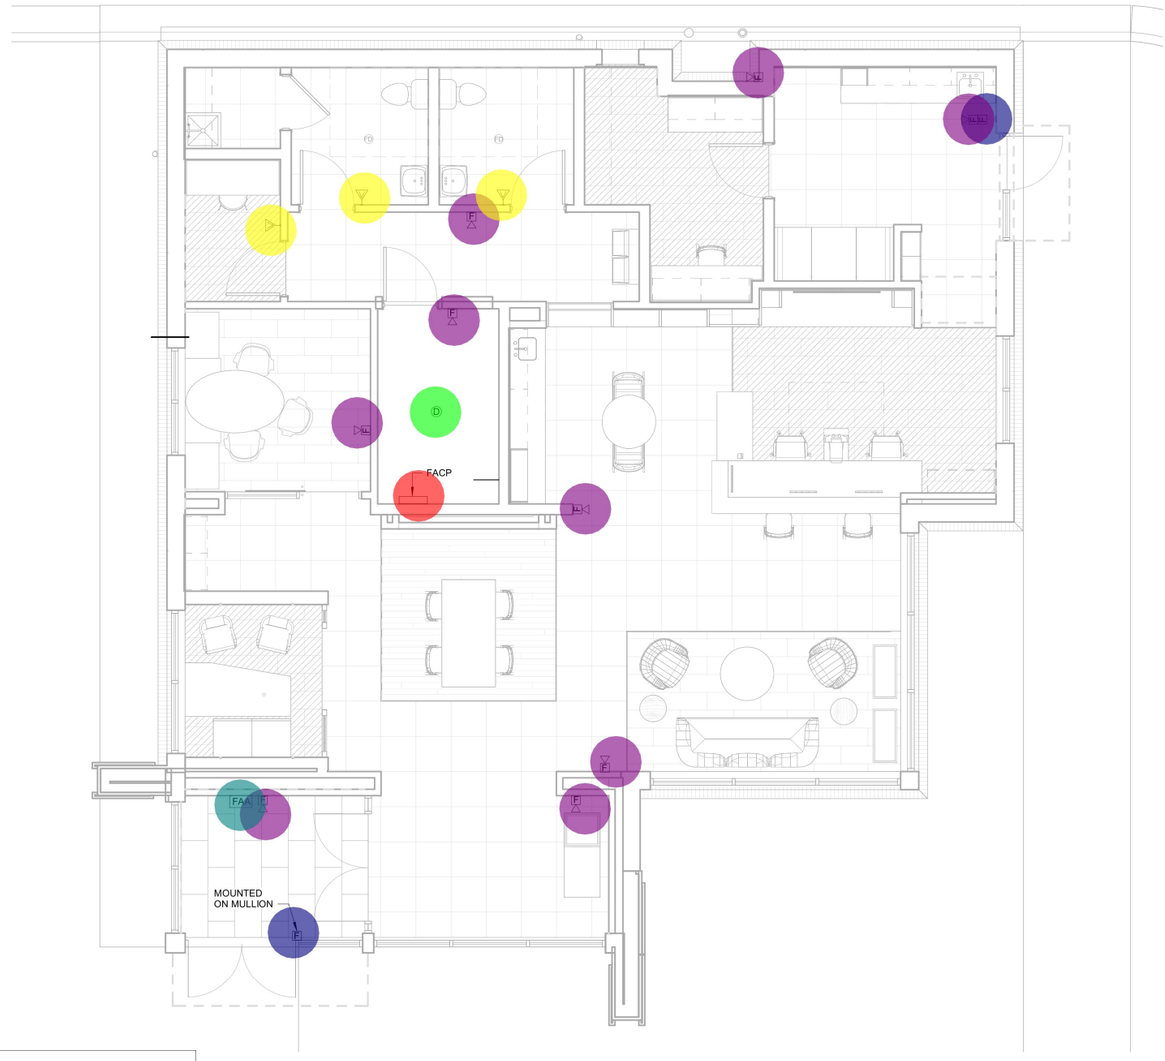

ELECTRICAL FIRE ALARM PLAN

FIRE ALARM PULL S...	2.0 EA
FIRE ALARM ADA AP...	9.0 EA
FIRE ALARM ANNUC...	1.0 EA
FIRE ALARM CONTR...	1.0 EA
FIRE ALARM SMOKE...	1.0 EA
FIRE ALARM ADA AP...	3.0 EA
ALLOWANCE FOR W...	1.0 EA

SHEET NOTES:

1. ALL FIRE ALARM DEVICES, INCLUDING SPEAKERS, VISUALS, SMOKE DETECTORS, ETC. SHALL BE CONNECTED TO THE BASE BUILDING BY A LANDLORD APPROVED, LICENSED FIRE ALARM CONTRACTOR WHO'S BUSINESS IS FIRE ALARM INSTALLATION AND/OR SERVICE.
2. ALL DEVICES ARE TO BE MOUNTED A MINIMUM OF 80" FROM BOTTOM OF STROBE TO FINISHED FLOOR. DEVICES ARE TO BE MOUNTED IN PROPER BOXES (NOT TO BE MOUNTED IN EXTENSION RINGS). JUNCTION BOXES ARE TO BE CLEARLY LABELED "F/A". FLEX CONDUIT WITH INTERNAL CONNECTORS ARE TO BE USED FROM DEVICE BOX TO HOME RUN JUNCTION BOX. IN FULL WALL PENETRATIONS, CONDUIT OR FLEX MUST BE KEPT AT 12" MINIMUM ABOVE THE CEILING.
3. STROBE AND HORN WIRING TO BE 14 AWG THIN STRANDED WIRED, RED/BLACK AND SPEAKER TO BE "BELDON 8760" WITH SHIELD, GRAY JACKET OR EQUIVALENT. FOUR CONDUCTOR OR CABLES ARE NOT TO BE USED ON FIRE ALARM DEVICES. SOLID WIRE IS NOT TO BE USED. SPLICING OF WIRE BETWEEN DEVICES IS PROHIBITED. ALL FIRE ALARM WIRING TO BE PUT IN MINIMUM 1/2" EMT CONDUIT, DEDICATED HANGERS OR STRAPPED, TO BE LOCATED AT THE HIGHEST POINT ABOVE THE CEILING. FIRE ALARM WIRE MUST NOT OCCUPY THE SAME WALL PENETRATION WITH DUCTWORK, PIPING, ELECTRICAL DEVICES OR CIRCUITS. ALL CONDUIT SHALL BE TERMINATED WITH INSULATION BUSHINGS.
4. PROVIDE AND INSTALL POWER SUPPLY FOR NEW STROBES - MATCH BUILDING STANDARD - WITH NECESSARY BATTERIES, BASED ON MAXIMUM OF 20 DEVICES PER POWER SUPPLY. POWER SUPPLY TO BE CONNECTED TO A DEDICATED CIRCUIT AND SUPERVISED FOR FAILURE.
5. WIRING METHOD TO MEET THE ABOVE BUILDING STANDARDS AND COMPLY WITH ARTICLE 760 OF NEC-70 CODE REQUIREMENTS.
6. ALL DEVICES SHALL BE 110 CANDELA UNLESS OTHERWISE NOTED. THE ENTIRE LENS OF VISUAL FIRE ALARM DEVICES SHALL BE MOUNTED AT LEAST 80" AFF.
7. COORDINATE FIRE ALARM SYSTEM SHUTDOWNS AND REPROGRAMMING WITH OWNER.
8. PROVIDE LETTER OF CERTIFICATION FOR NEW FIRE ALARM DEVICES.

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303

404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL FIRE ALARM PLAN

Sheet Number:
E-160

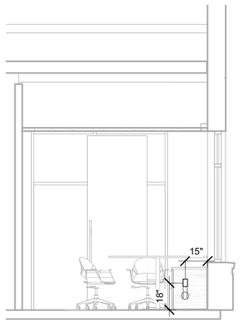

4 E-702 ELEVATION MEETING ROOM 105/4
1/4" = 1'-0"

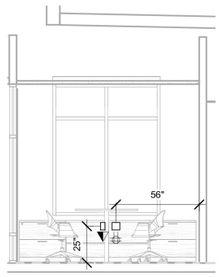

3 E-702 ELEVATION MEETING ROOM 105/3
1/4" = 1'-0"

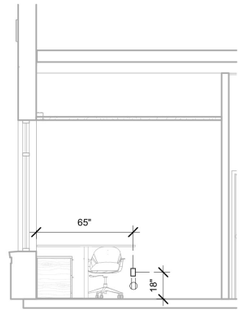

2 E-702 ELEVATION MEETING ROOM 105/2
1/4" = 1'-0"

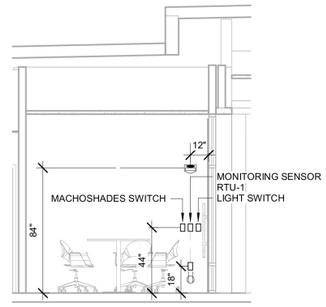

1 E-702 ELEVATION MEETING ROOM 105/1
1/4" = 1'-0"

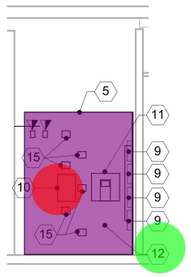

8 E-702 ELEVATION ELEC/IT 106/4
1/4" = 1'-0"

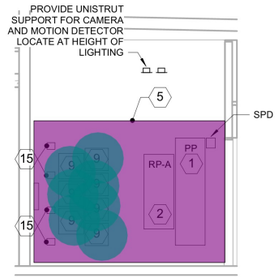

7 E-702 ELEVATION ELEC/IT 106/3
1/4" = 1'-0"

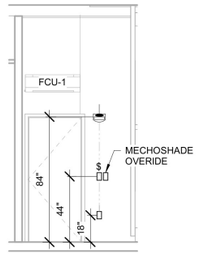

6 E-702 ELEVATION ELEC/IT 106/2
1/4" = 1'-0"

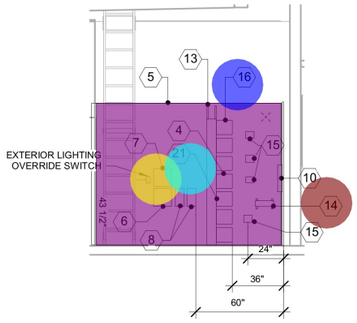

5 E-702 ELEVATION ELEC/IT 106/1
1/4" = 1'-0"

KEYED NOTES:

1. PANEL PP
2. PANEL RP-A SEC I
3. NOT USED
4. DATA RACK
5. PLYWOOD BACKBOARD: PROVIDE 8' X (LENGTH AS REQUIRED) X 3/4" FIRE-RATED PLYWOOD BACKBOARDS MOUNTED VERTICALLY ALONG ALL NER ROOM WALLS. UL FIRE RATING LABEL SHALL REMAIN VISIBLE AFTER INSTALLATION.
6. LIGHTING CONTROL PANEL
7. DIMMER PANEL
8. LIGHTING CONTACTOR
9. SECURITY PANEL
10. TELECOMMUNICATION BOX
11. FIRE ALARM CONTROL PANEL: FIRE ALARM CONTROL PANEL WITH TOP OF CABINET NOT TO EXCEED 72" ABOVE THE FINISHED FLOOR.
12. DIGITAL ALARM COMMUNICATOR TRANSMITTER
13. CABLE TRAY
14. GROUND BUS BAR: PROVIDE A 12" X 2" X 1/4" COPPER GROUND BAR WITH STANDOFF INSULATORS ON TELEPHONE BACKBOARD. PROVIDE #2 AWG COPPER GROUND ROUTED IN 1" CONDUIT FROM TELEPHONE BACKBOARD GROUNDING BAR TO ELECTRICAL SERVICE GROUNDING ELECTRODE SYSTEM. COORDINATE EXACT LOCATION ON BACKBOARD WITH TELEPHONE SERVICE PROVIDER.
15. QUAD RECEPTACLE
16. PROVIDE A PANDUIT (PART NUMBER: R2P) TWO POST CABLE MANAGEMENT RACK SYSTEM IN IT/ELEC ROOM
17. PROVIDE PANDUIT (PART NUMBER: WMPV45E) VERTICAL CABLE MANAGER AND PANDUIT (PART NUMBER: WMP1E) HORIZONTAL CABLE MANAGER IN ELECTRICAL/IT ROOM AS REQUIRED.
18. PROVIDE 18" STEEL HOMACO LADDER RACK ABOVE TBB AT 90" AFF. BOND ALL SECTIONS WITH #6 AWG GREEN INSULATED COPPER GROUND TO GROUND BUS ON TBB.
19. PROVIDE (1) CAT 6 CABLE RUN FROM RACK TO DRIVE UP EQUIPMENT MATRIX LOCATION. COORDINATE EXACT LOCATION WITH OWNER VENDOR.
20. ELECTRICAL CONTRACTOR TO PULL CABLES FOR MOOD MEDIA. EQUIPMENT PROVIDED BY OWNER

ELEC/IT 106 ELEVATION GENERAL NOTES:

1. ELEVATIONS ARE SHOWN FOR REFERENCE ONLY. COORDINATE WITH RESPECTIVE EQUIPMENT SUPPLIERS FOR EXACT DIMENSIONS, REQUIRED CLEARANCES, LOCATIONS, MOUNTING HEIGHTS, AND ROUGH-IN REQUIREMENTS AND ADJUST IN FIELD AS REQUIRED.
2. MAINTAIN A MINIMUM OF 36" CLEAR IN THE FRONT OF THE ELECTRICAL PANELS PER NEC 110.26.
3. EXPOSED CONDUIT IN ELECTRICAL/IT ROOM SHALL BE EMT; MC CABLE SHALL NOT BE EXPOSED.
4. ALL WIRING DEVICES IN NEC AND ELECTRICAL ROOM SHALL BE FLUSH MOUNTED.
5. LOW VOLTAGE CONDUITS SHALL BE PROVIDED WITH PLASTIC INSULATED CONDUIT BUSHINGS ON EACH END AND NYLON PULL STRING.

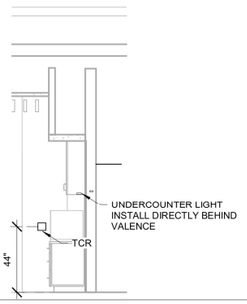

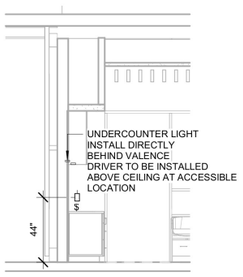

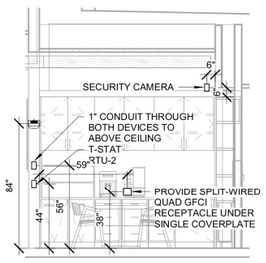

10 E-702 ELEVATION LIBRARY 107/1
1/4" = 1'-0"

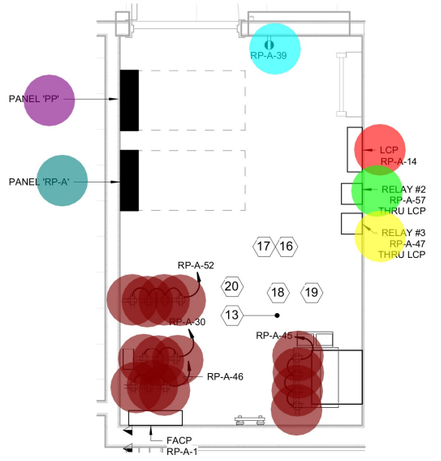

9 E-702 ENLARGED ELEC/IT ROOM 1
1/2" = 1'-0"

PANEL PP	1.0 EA
PANEL RP-A	1.0 EA
GFCI DUPLEX RECEPTACLE, 20A, 125V	1.0 EA
LCP	1.0 EA
RELAY#2	1.0 EA
RELAY#3	1.0 EA
QUAD RECEPTACLE, 20A, 125V	14.0 EA
3/4"THK. FIRE RATED PLYWOOD BACKBOARD	215.3 SQ FT
SECURITY PANEL	7.0 EA
TELECOMMUNICATION BOX	1.0 EA
DIGITAL ALARM COMMUNICATOR TRANSMITTER	1.0 EA
DIMMER PANEL	1.0 EA
PANDUIT TWO POST CABLE MANAGMENT RACK SYSTEM	1.0 EA
18" STEEL HOMACO LADDER RACK	1.0 EA
GROUND BUS BAR, 12"x2"x1/4" COPPER GROUND BAR W/ STANDOFF INSULATORS...	1.0 EA

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL ELEVATIONS

Sheet Number:
E-702

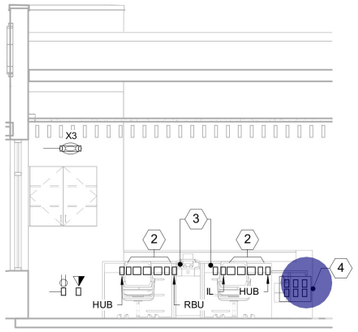

4 E-703 ELEVATION TRANSACTION 108/4
1/4" = 1'-0"

NOTE:

1. TRANSACTION BAR DEVICE LAYOUT IS DIAGRAMMATIC FOR REFERENCE AND NOT TO SCALE. COORDINATE WITH MILLWORK SHOP DRAWINGS AND ARCHITECTURAL ELEVATIONS FOR EXACT PLACEMENT.
2. ELECTRICAL CONTRACTOR SHALL SUPPORT ALL LOW VOLTAGE WIRING AND TIE TOGETHER MULTIPLE RUNS CABLES WITH VELCRO AS REQUIRED FOR A NEAT INSTALLATION.
3. ELECTRICAL CONTRACTOR SHALL COORDINATE WITH MILLWORK SHOP DRAWINGS TO PLAN ALL CONDUIT ROUTING. SUPPORT ALL RACEWAYS PER NEC.

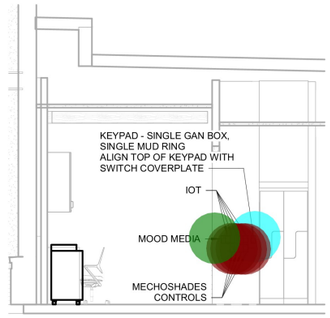

3 E-703 ELEVATION TRANSACTION 108/3
1/4" = 1'-0"

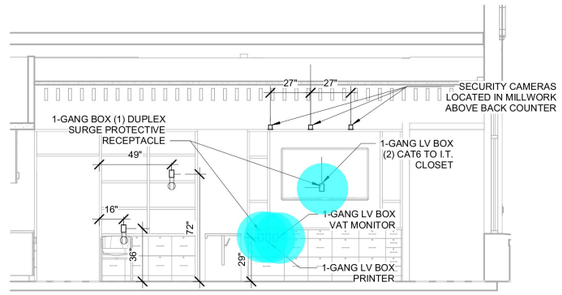

2 E-703 ELEVATION TRANSACTION BAR 108/2
1/4" = 1'-0"

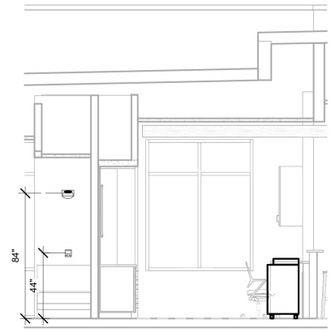

1 E-703 ELEVATION TRANSACTION 108/1
1/4" = 1'-0"

KEYED NOTES:

1. TCR POWER & DATA OUTLET - MOUNT SO THAT TCR CAN BE PLACED UP AGAINST THE MILLWORK AND SO THAT THE POWER & DATA CORD OF THE EQUIPMENT WILL REACH THE OUTLET. IDENTIFY RECEPTACLE 'TCR'.
2. OUTLETS SHALL BE PLACED IN OPENINGS MADE AVAILABLE FROM MILLWORK. DIAGRAM SHOWS GENERAL PLACEMENT OF OUTLETS WITHIN THE OPENINGS. COORDINATE WITH MILLWORK SHOP DRAWINGS AND ARCHITECTURAL ELEVATIONS FOR EXACT PLACEMENT.
3. ALL POWER WIRING AND DATA WIRING SHALL BE RUN THROUGH OPENINGS PROVIDED BY MILLWORK PROVIDER. GENERAL LOCATION - COORDINATE WITH MILLWORK SHOP DRAWINGS AND ARCHITECTURAL ELEVATIONS FOR EXACT DIMENSIONS.
4. RECESSED ELECTRICAL BOXES (ARLINGTON BOXES TVBS507 3-GANG) FOR POWER & DATA - SEE NOTES ON FLOOR PLAN FOR REQUIREMENTS.

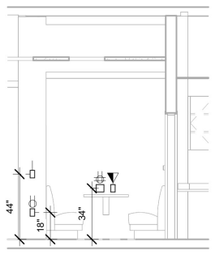

8 E-703 ELEVATION EMPLOYEE LOUNGE 110/4
1/4" = 1'-0"

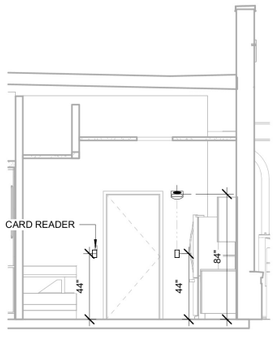

7 E-703 ELEVATION EMPLOYEE LOUNGE 110/3
1/4" = 1'-0"

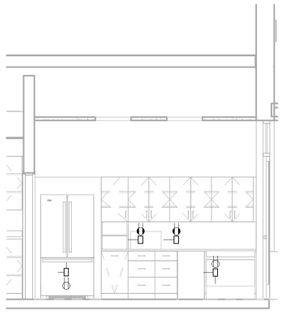

6 E-703 ELEVATION EMPLOYEE LOUNGE 110/2
1/4" = 1'-0"

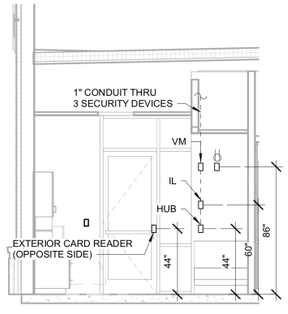

5 E-703 ELEVATION EMPLOYEE LOUNGE 110/1
1/4" = 1'-0"

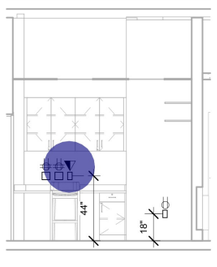

11 E-703 ELEVATION WORK ROOM 111/3
1/4" = 1'-0"

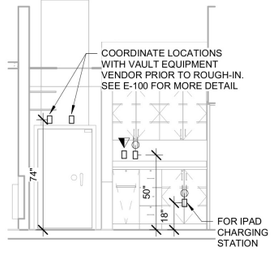

10 E-703 ELEVATION WORK ROOM 111/2
1/4" = 1'-0"

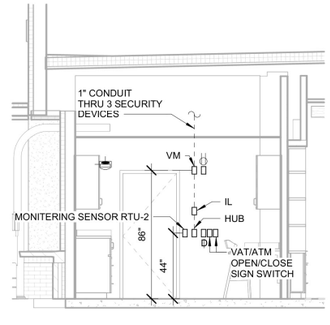

9 E-703 ELEVATION WORK ROOM 111/1
1/4" = 1'-0"

- COMBINATION DATA OUTLET 1.0 EA
- 1-GANG BOX 5.0 EA
- MECHOSHADES CONTROL SWITCH 4.0 EA
- MOOD MEDIA SWITCH 1.0 EA
- RECESSED ELECTRICAL BOX (ARLINGTON BOXES TVBS507 3-GANG) 1.0 EA

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL ELEVATIONS

Sheet Number:
E-703