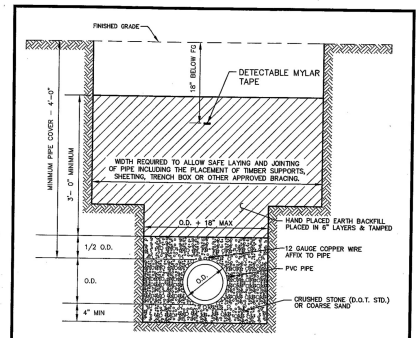

REQUIRED COMPACTION AND TESTING

1. OUTSIDE OF PAVED OR PROPOSED PAVED AREAS STANDARD PROCTOR, 90% TESTING REQUIRED FIRST 3' ONLY.
2. UNDER PAVED OR PROPOSED PAVED AREAS STANDARD PROCTOR, 95% TESTING REQUIRED EVERY 3' TO GRADE.
3. UNDER D.O.T. ROADWAYS OR PROPOSED D.O.T. ROADWAYS STANDARD PROCTOR, 98% TESTING REQUIRED EVERY 3' TO GRADE.
4. ALL COMPACTION TESTING SHALL BE CONDUCTED BY AN APPROVED SOILS TESTING FIRM.

SECTION - SANITARY SEWER BEDDING PVC PIPE

N.T.S. PLOT SCALE: 1=12

SANITARY SEWER BEDDING – PVC PIPE	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 08/30/01 FILE: SSBED2.DWG SHEET: S2

DETAIL

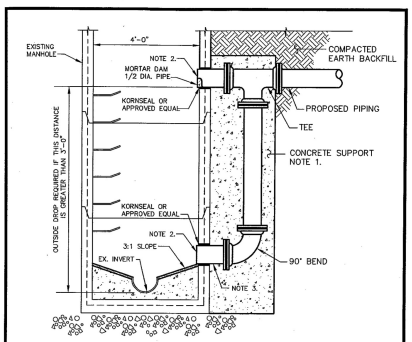

NOTE:

1. CONCRETE SHALL BE PLACED TO BOTTOM OF MANHOLE AND ENCASE DROP PIPING A MINIMUM OF 6" IN ALL DIRECTIONS.
2. EXTEND NEW PIPE A MAXIMUM OF 1" INTO EXISTING MANHOLE.
3. LOCATE DROP INVERT ABOVE EXISTING SHELF. GROUT SHELF TO 3:1 SLOPE.
4. DROP PIPE AND FITTINGS MAY BE DUCTILE IRON OR PVC

SECTION - DROP TIE-IN TO EXIST. MANHOLE

SCALE: 1" = 2'-0" PLOT SCALE: 1 = 24

DROP TIE-IN TO EXISTING MANHOLE	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 8/30/01 FILE: SSDROPEX.DWG SHEET: S9

DETAIL

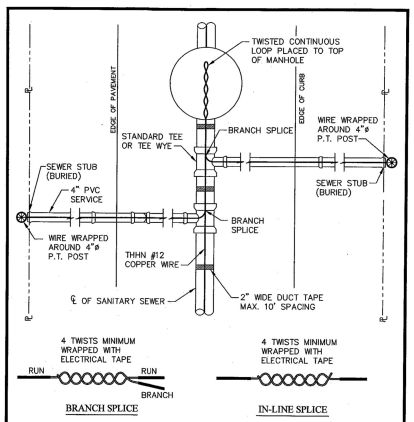

NOTES:

1. PROTECTIVE COATING SHALL BE STRIPPED PRIOR TO SPLICE. WRAP FINISHED SPLICE WITH ELECTRICAL TAPE.

DETAIL - TRACER WIRE PLACEMENT - SEWER

N.T.S. PLOT SCALE: 1=12

TRACER WIRE PLACEMENT	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 11/01/01 FILE: SWIRE.DWG SHEET: S15

DETAIL

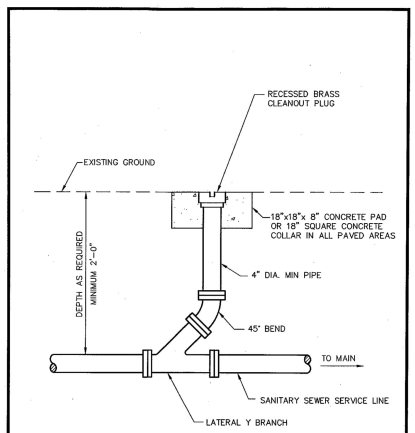

DETAIL - CLEANOUT TO GRADE

SCALE: 1" = 1'-0" PLOT SCALE 1=12

CLEANOUT TO GRADE	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 8/30/01 FILE: SSCO.DWG SHEET: S17

DETAIL

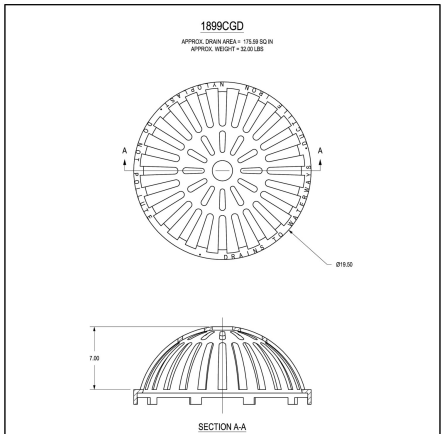

DIMENSIONS ARE FOR REFERENCE ONLY
ACTUAL DIMENSIONS MAY VARY
DIMENSIONS ARE IN INCHES
QUALITY: MATERIALS SHALL CONFORM TO ASTM A536 GRADE 70-50-05
PAINT: CASTINGS ARE FURNISHED WITH A BLACK PAINT
LOCKING DEVICE AVAILABLE UPON REQUEST

THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH NYLOPLAST HAS PROPRIETARY RIGHTS. THE RECEIPT OR POSSESSION OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION SHOWN HEREIN. REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLE HEREFROM, FOR THE DISCLOSURE TO OTHERS IS FORBIDDEN, EXCEPT BY SPECIFIC WRITTEN PERMISSION FROM NYLOPLAST.

DRAWN BY	EDC	MATERIAL	DUCTILE IRON
DATE	03-05-05		
REVISED BY	CGA	PROJECT NO./NAME	
DATE	08-30-13	TITLE	18 IN DOME GRATE
DWG SIZE	A	SCALE 1:6	SHEET 1 OF 1
DWG NO.	7901-18-215		REV E

ADS Nyloplast — 3130 VERONA AVE BUFORD, GA 30518 PHN (770) 932-2443 FAX (770) 932-2496 www.nyloplast-us.com

DETAIL

PREPARED IN THE OFFICE OF:
GASKINS + LECRAW
a PAPE-DAWSON company
© 2026 GASKINS + LECRAW
3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

NO. #	DATE	DRAWN BY	CHECKED BY
1			

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W0780-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

FOR INFORMATIONAL PURPOSES ONLY

CALL BEFORE YOU DIG

811 Know what's below. Call before you dig.

SCALE & NORTH ARROW:

DETAILS ARE NOT DRAWN TO SCALE

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	MAT
REVIEWED BY:	TKS
JOB #:	75670007
DATE:	JULY 9, 2026

CONSTRUCTION DETAILS - 3

C-6.2

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company. Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026

Drawing name: C:\Users\JoeArd\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins, GA\CAD\CONSTRUCTION\75670007 - 10 - DETAILS.dwg CONSTRUCTION DETAILS - 3 Jul 09, 2026 10:50am by cdavis

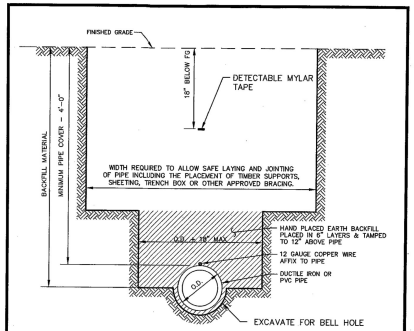

NOTES:

1. TRENCH SHALL BE EXCAVATED TO THE DEPTH REQUIRED PROVIDING A UNIFORM AND CONTINUOUS BEARING AND SUPPORT FOR THE PIPE ON SOLID, UNDISTURBED GROUND AT EVERY POINT BETWEEN BELLS OR COUPLINGS.
2. WHEN POOR BEDDING SOIL IS ENCOUNTERED, REMOVE UNSUITABLE SOIL TO REQUIRED DEPTH AND BACKFILL WITH AN APPROVED AGGREGATE MATERIAL PRIOR TO LAYING PIPE. BACKFILL SHALL BE PLACED IN 6" LIFTS WITH EACH LAYER TAMPED TO 95% COMPACTION.

SECTION - WATER LINE BEDDING

N.T.S.

PLOT SCALE: 1=12

WATER LINE BEDDING	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 8/30/01 FILE: WBED.DWG SHEET: W1

DETAIL

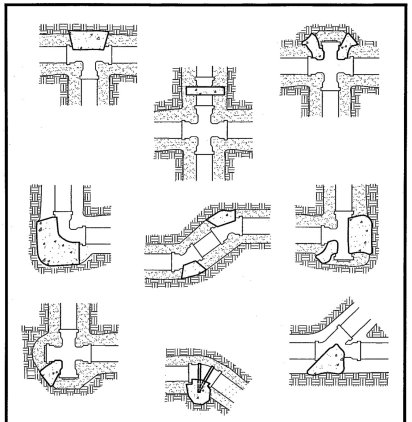

DETAIL - THRUST BLOCK LOCATIONS

N.T.S.

PLOT SCALE: 1=12

TYPICAL LOCATIONS FOR THRUST BLOCKS	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 8/29/01 FILE: WTHRUSTLOC.DWG SHEET: W2

DETAIL

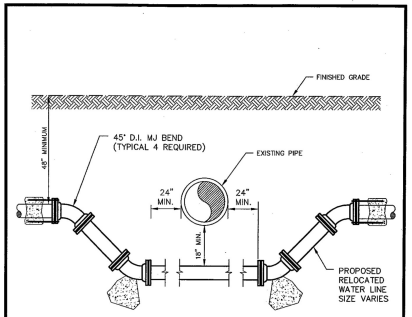

NOTES:

1. ALL FITTINGS SHALL BE PROPERLY BLOCKED OR TIE-RODDED AS REQUIRED TO INSURE SUFFICIENT ANCHORAGE OF THE PIPING.
2. PROVIDE SUFFICIENT BACKFILL AND COMPACTION OVER WATER LINE TO ASSURE PROTECTION OF THE PIPE.

PROFILE - WATER LINE CONFLICT

SCALE" 1" = 2'-0"

PLOT SCALE: 1=24

WATERLINE CONFLICT	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 8/30/01 FILE: WATCONF.DWG SHEET: W7

DETAIL

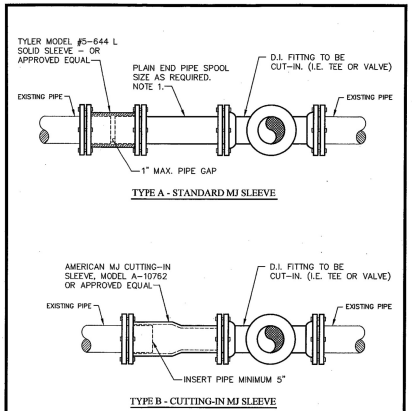

NOTE:

1. EXISTING PIPE CUT OUT FOR FITTING MAY BE USED FOR SPOOL PIECE.

DETAIL - CUTTING-IN SLEEVE

N.T.S.

PLOT SCALE: 1=12

CUTTING-IN SLEEVE	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 11/01/01 FILE: WCUTIN.DWG SHEET: W6

DETAIL

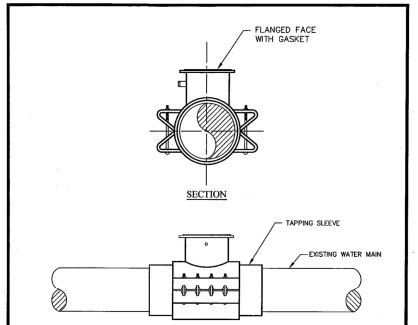

NOTES:

1. TAPPING SLEEVE SHALL BE JCM MODEL #422 OR APPROVED EQUAL.
2. NO TAP SHALL BE MADE ON A PUBLIC MAIN WITHOUT PRIOR APPROVAL. A QUALIFIED REPRESENTATIVE SHALL BE ON-SITE FOR ALL TAPS.

DETAIL - TAPPING SLEEVE

N.T.S.

PLOT SCALE: 1=12

TAPPING SLEEVE SYSTEM	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 11/01/01 FILE: WTAP.DWG SHEET: W9

DETAIL

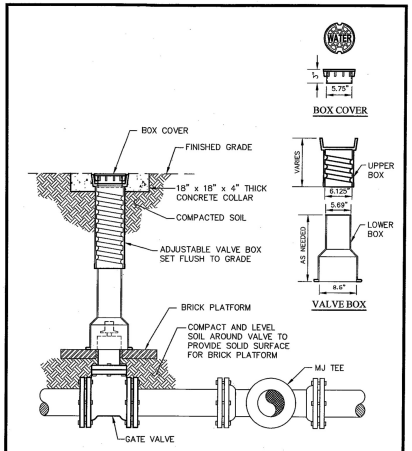

TYPICAL WATER VALVE SETTING

SCALE: 1"= 1'-0"

PLOT SCALE: 1=12

TYPICAL WATER VALVE SETTING	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 11/01/01 FILE: WVALVE.DWG SHEET: W11

DETAIL

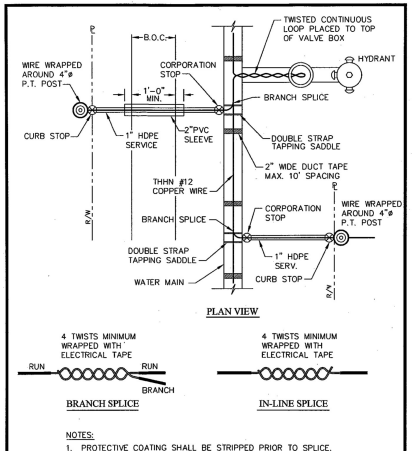

NOTES:

1. PROTECTIVE COATING SHALL BE STRIPPED PRIOR TO SPLICE. WRAP FINISHED SPLICE WITH ELECTRICAL TAPE.

DETAIL - TRACER WIRE PLACEMENT - WATER

N.T.S.

PLOT SCALE: 1=12

TRACER WIRE PLACEMENT	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 11/01/01 FILE: WWIRE.DWG SHEET: W14

DETAIL

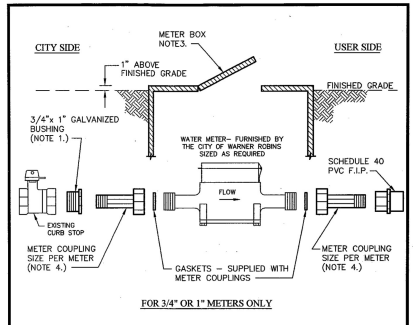

NOTES:

1. GALVANIZED BUSHING WILL BE REQUIRED FOR 3/4" METER ON 1" CURB STOP.
2. ALL THREADS SHALL BE COATED WITH RECTOR SEAL NO. 5 OR APPROVED EQUAL.
3. METER BOX WITH READER DOOR SHALL BE DFW D1200-DIRB OR APPROVED EQUAL.
4. METER COUPLINGS SHALL BE OF ONE OF THE FOLLOWING:
   FORD P/N C38-23-2.5 (3/4"x 2-1/2" L) OR C38-44-2.625 (1"x2-5/8" L)
   MUELLER P/N H-10898 (3/4"x 2-1/2" L OR 1"x 2-5/8" L)
   A.Y. McDONALD P/N 4620 (3/4"x 2-1/2" L OR 1"x 2-5/8" L)

STANDARD WATER METER DETAIL

N.T.S.

PLOT SCALE: 1=12

WATER METER DETAIL	CITY OF WARNER ROBINS UTILITIES DISTRIBUTION STANDARD DETAIL WATER/SEWER/GAS/STORM	DATE: 12/01/01 FILE: WMETER.DWG SHEET: W15

DETAIL

PREPARED IN THE OFFICE OF:
GASKINS + LECRAW
a PAPE-DAWSON company
© 2026 GASKINS + LECRAW
3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

NO. #	DATE	DRAWN BY	CHECKED BY
1			

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W0780-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

FOR INFORMATIONAL PURPOSES ONLY

CALL BEFORE YOU DIG

811 Know what's below. Call before you dig.

SCALE & NORTH ARROW:

DETAILS ARE NOT DRAWN TO SCALE

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	MAT
REVIEWED BY:	TKS
JOB #:	75670007
DATE:	JULY 9, 2026

CONSTRUCTION DETAILS - 4

C-6.3

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company. Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026

Drawing name: C:\Users\JAnd\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins, GA\CAD\CONSTRUCTION\75670007 - 10 - DETAILS.dwg, CONSTRUCTION DETAILS - 4, Jul 09, 2026, 10:50am, by cdavis

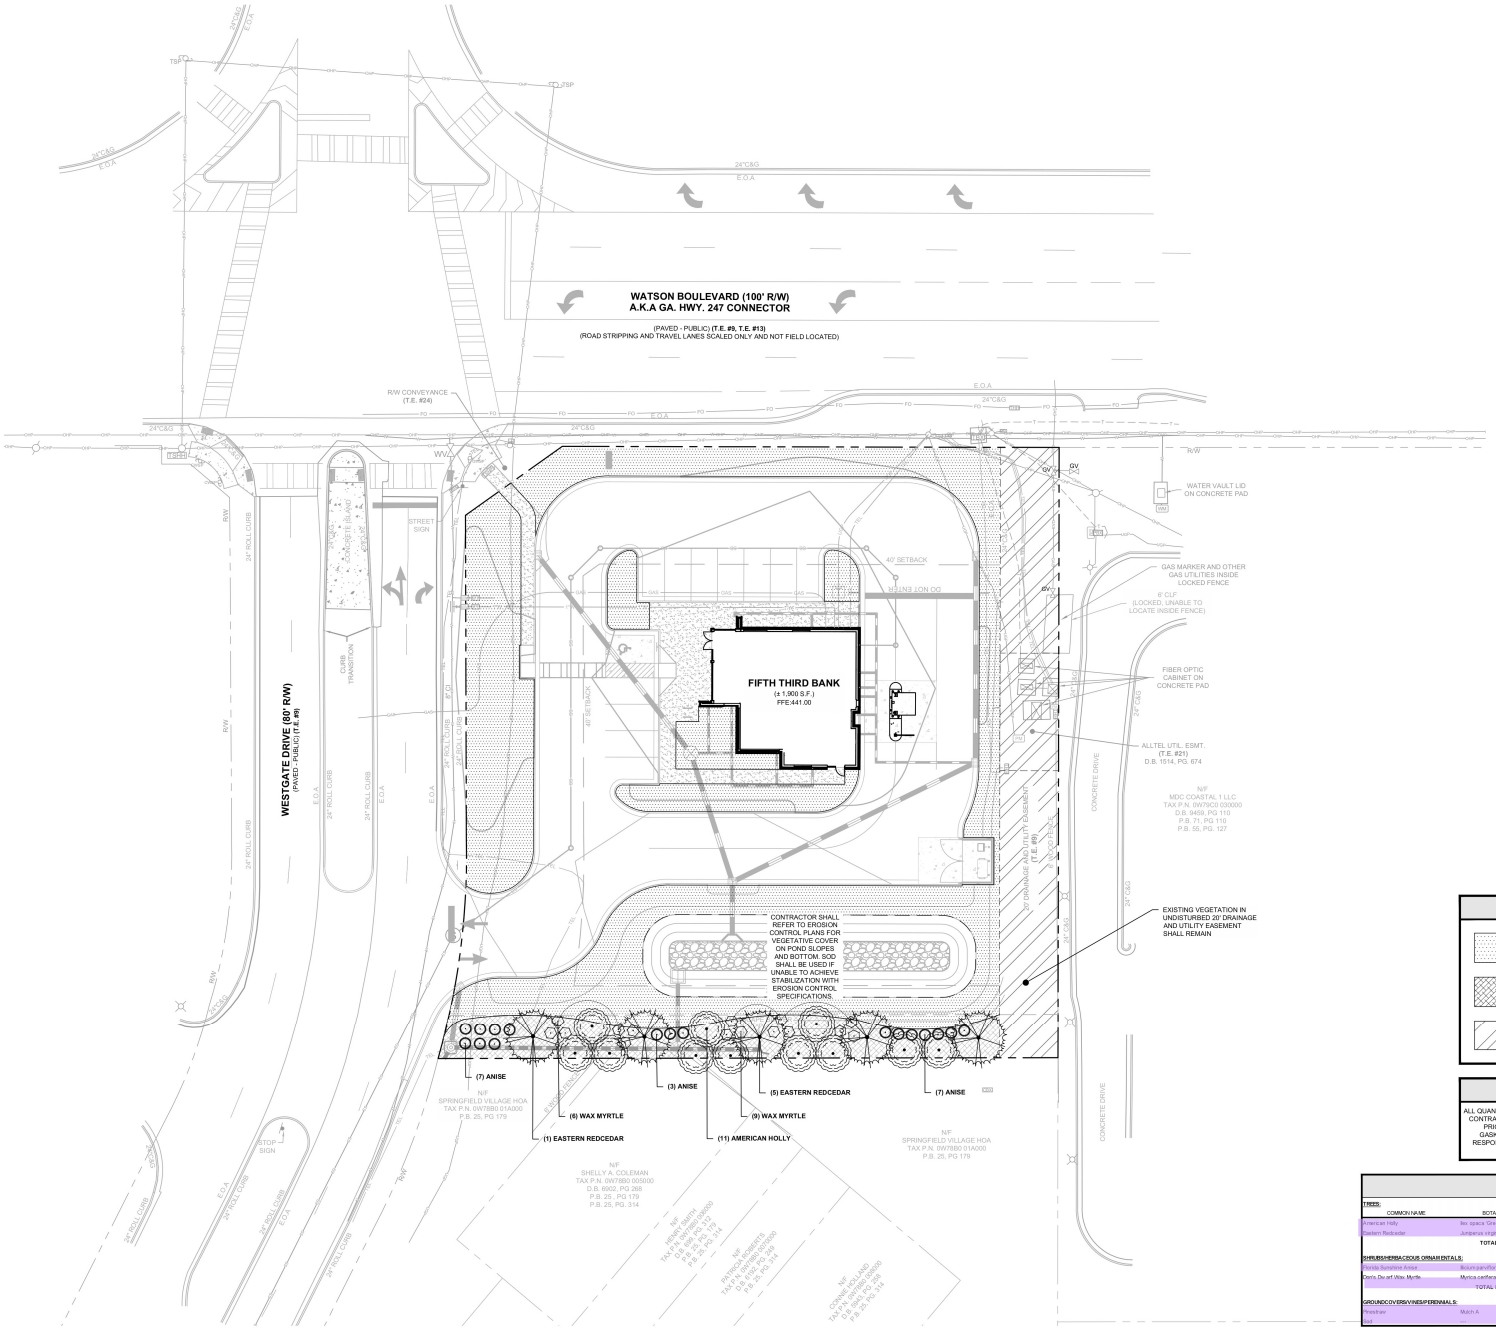

ORDINANCE REQUIREMENTS

15' LANDSCAPE BUFFER
A BUFFER CONSISTING OF A DENSE PLANTING OF TREES AND/OR SHRUBS SHALL BE ESTABLISHED ON A STRIP OF LAND NOT LESS THAN FIFTEEN (15) FEET IN WIDTH OR A FENCE OF SOLID APPEARANCE WITH A MINIMUM HEIGHT OF SIX (6) FEET EIGHT (8) INCHES FROM THE PAVEMENT ON A STRIP OF LAND NOT LESS THAN FIVE (5) FEET ALONG THOSE LOT LINES OF THE PARKING AREAS WHICH ABUT RESIDENTIAL DISTRICTS. IF A PLANTED BUFFER IS USED, IT SHALL BE ESTABLISHED TO A MINIMUM HEIGHT OF SIX (6) FEET WITHIN TWO (2) YEARS OF PLANTING. (SECTION 62.4.4)

SITE SUMMARY

SITE AREA	
SITE AREA:	0.96 ACRES (41,909 S.F.)
IMPERVIOUS AREA:	21,033 S.F. (50.2%)
PERVIOUS AREA:	20,876 S.F. (49.8%)
ZONING CLASSIFICATION	
JURISDICTION:	CITY OF WARNER ROBINS
ZONING:	C-2 (GENERAL COMMERCIAL DISTRICT)
ADJACENT ZONING:	C-2 / R-3
BUILDING SETBACKS	
FRONT:	40'
SIDE:	0'
REAR:	20'
BUILDING SUMMARY	
BUILDING AREA:	1,900 S.F.
BUILDING COVERAGE:	4.5%
PARKING SUMMARY	
PARKING REQ.:	1 SPACE / 300 S.F.
	7 SPACES
PARKING PROV.:	11 SPACES
STANDARD STALL DIMENSIONS:	9' x 18'
MIN. DRIVE WIDTH:	24'

HATCH LEGEND

- SOD / GRASS
- MULCH
- 20' DRAINAGE & UTILITY EASEMENT

NOTE

ALL QUANTITIES ARE FOR A GENERAL GUIDE ONLY. CONTRACTOR SHALL CONFIRM ALL QUANTITIES PRIOR TO BIDDING AND INSTALLATION. GASKINS + LECRAW, INC. SHALL TAKE NO RESPONSIBILITY FOR THE ACCURACY OF THE QUANTITIES PROVIDED.

PLANT LEGEND

SYMBOL	COMMON NAME
TREES	
	AMERICAN HOLLY
	EASTERN REDCEDAR
SHRUBS	
	ANISE
	WAX MYRTLE

PLANT LIST

TREES:

COMMON NAME	BOTANICAL NAME	QUANTITY	MIN. SIZE	MIN. SPACING	NOTES
American Holly	Ilex opaca 'Greenleaf'	5	6' HT.	12' O.C.	B&B - HEALTHY, SINGLE LEADER, FULL TO GROUND
Eastern Redcedar	Juniperus Virginiana	11	6' HT.	40' O.C.	B&B - HEALTHY, ONE CENTRAL LEADER
	TOTAL NUMBER OF TREES:	16			
SHRUBS/HERBACEOUS ORNAMENTALS:					
Florida Sunshine Anise	Illicium parviflorum 'Florida Sunshine'	17	3 GAL	5' O.C.	FULL, FREE OF PEST & DISEASE
Dan's Dwarf Wax Myrtle	Myrica cerifera 'Dan's Dwarf'	15	3 GAL	5' O.C.	FULL, FREE OF PEST & DISEASE
	TOTAL NUMBER OF SHRUBS:	32			
GROUNDCOVERS/VINES/PERENNIALS:					
Asiatic Jasmine	Mann A	2,500 S.F.			
Sod		11,000 S.F.			

PREPARED IN THE OFFICE OF:
GASKINS + LECRAW
a PAPE-DAWSON company
© 2026 GASKINS + LECRAW
3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

NO. #	DATE	DRAWN BY	CHECKED BY
1			

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W078D-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

GEORGIA REGISTERED LANDSCAPE ARCHITECT 933 MICHAEL T. SOOTHMER
7/9/26

CALL BEFORE YOU DIG
811 Know what's below. Call before you dig.

SCALE & NORTH ARROW:

NORTH ARROW
0' 10' 20' 40'
SCALE: 1" = 20'

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	JOA
REVIEWED BY:	MAT
JOB #:	75670007
DATE:	JULY 9, 2026

LANDSCAPE PLAN

L-1.0

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company. Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026

Drawing name: C:\Users\JoeArd\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins, GA\CAD\CONSTR\75670007 - 11 - LANDSCAPE.dwg LANDSCAPE PLAN Jul 09, 2026 10:53am by JArdell

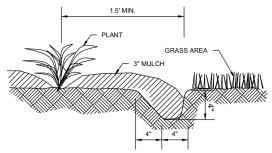

PLANT BED EDGING DETAIL

NOTES

1. LAYOUT PERIMETER PLANTING SPACES AS PER PLAN.
2. FILL IN PLANTING BED WITH TRIANGULAR SPACING.
3. ADJUST AS PER L.A.'S INSTRUCTIONS.

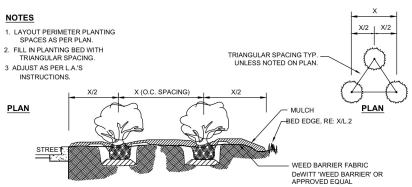

SHRUB & GROUNDCOVER BED DETAIL

NOTE:

1. ATTACH GUYS TO THE CENTRAL LARGEST TRUNK.
2. SPACE STAKES EVENLY AROUND ROOTBALL PIT SUCH THAT WIRES DO NOT COME IN CONTACT WITH ANY TRUNK OR BRANCH.



PLANTING PROCEDURE:

1. EXCAVATE ROOTBALL PIT.
2. ADD EXCAVATED SOIL & TAMP. SET TREE SUCH THAT TOP OF ROOTBALL IS 2-3" HIGHER THAN FINISHED GRADE.
3. BACKFILL W/SOIL MIX & "WATER IN"

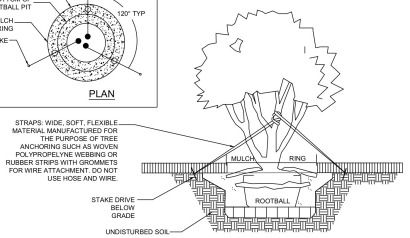

MULTI-TRUNK TREE PLANTING DETAIL

GENERAL IRRIGATION NOTES

1. CONTRACTOR SHALL LOCATE UTILITIES AND SERVICES IN AND AROUND THE SITE PRIOR TO START OF WORK.
2. THE CONTRACTOR SHALL MAKE ALL EFFORTS TO AVOID DAMAGE TO EXISTING STRUCTURES, PAVING, AND UTILITIES.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY REPAIR OF DAMAGE TO ON-SITE UTILITIES, STRUCTURES, OR PAVING RESULTING FROM IRRIGATION CONSTRUCTION. REPAIRS SHALL BE COMPLETED AT NO ADDOTIONAL COST TO THE OWNER.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONFORMING TO ALL CODES AND ORDINANCES RELEVANT TO THE WORK UNDER THIS CONTRACT.
5. ALL WORK SHALL BE SUBJECT TO THE APPROVAL OF THE LANDSCAPE ARCHITECT OR OWNER.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL MATERIALS AND LABOR TO FULLY EXECUTE AND GUARANTEE, AS REQUIRED, ALL WORK IN ACCORDANCE WITH SPECIFICATIONS, AND ALSO AS PER INSTRUCTIONS OF THE LANDSCAPE ARCHITECT AND THE OWNER.
7. CONTRACTOR SHALL USE ONLY NEW, COMMERCIAL GRADE MATERIAL.
8. AUTOMATIC CONTROL CLOCK WILL BE LOCATED ON-SITE BY THE LANDSCAPE ARCHITECT OR OWNER.
9. IRRIGATION DESIGNER SHALL LAYOUT SYSTEM TO MINIMIZE CONFLICTS WITH THE LOCATION OF PROPOSED PLANT MATERIALS (AS SHOWN ON THE PLANTING PLAN) AND OTHER SITE AMENITIES.
10. ALL MAIN LINES SHALL BE INSTALLED A MAXIMUM OF 2' FROM THE BACK OF CURBS WHERE POSSIBLE. LATERALS LINES SHALL BE INSTALLED LIKEWISE WHERE POSSIBLE.
11. THE CONTRACTOR SHALL ADJUST THE RADIUS AND ARC OF EACH HEAD TO MINIMIZE "OVERTHROW" AND TO ELIMINATE "DRY SPOTS." OVERTHROW ONTO PAVED AREAS SHALL NOT BE ALLOWED.
12. ELECTRIC SUPPLY WILL BE STUBBED-OUT AT CONTROL CLOCK LOCATION BY OTHERS. THE IRRIGATION CONTRACTOR SHALL BE RESPONSIBLE FOR ALL ELECTRICAL CONNECTIONS FROM CONTROL VALVES TO THE CONTROL CLOCK.
13. THE ENTIRE SYSTEM SHALL BE UNCONDITIONALLY GUARANTEED BY THE IRRIGATION CONTRACTOR AGAINST ALL DEFECTIVE WORK AND MATERIALS FOR A PERIOD OF ONE YEAR FROM THE DATE OF TOTAL ACCEPTANCE.
14. THE IRRIGATION CONTRACTOR SHALL BE RESPONSIBLE AT TIME OF COMPLETION FOR PROVIDING "AS-BUILT" DRAWINGS, TO INCLUDE LOCATIONS OF ALL VALVES (MANUAL AND AUTOMATIC) WITH TRIANGULATED MEASUREMENTS TO EACH LOCATION AS WELL AS ANY DEVIATIONS IN LOCATION OF PIPING AND HEADS AS REPRESENTED BY THE CONTRACT DOCUMENTS.
15. IT IS THE RESPONSIBILITY OF THE IRRIGATION CONTRACTOR TO HAVE ALL PLANTING AREAS MARKED BY THE LANDSCAPE ARCHITECT OR CONTRACTOR PRIOR TO INSTALLATION.
16. ALL MAINLINES AND LATERAL LINES SHALL BE CLASS 200 PVC.
17. ALL SLEEVES SHALL BE SCHEDULE 40 PVC.
18. CONTRACTOR SHALL SUPPLY: TWO CVC KEYS AND MATCHING HOSE SWIVELS; TWO OF EACH TYPE OF IRRIGATION HEAD; AS-BUILT IRRIGATION PLAN; AND LAMINATED DIAGRAM OF IRRIGATION ZONES.
19. LAWN, SHRUBS/TREES, AND FLOWERS SHALL EACH BE ZONED SEPARATELY.
20. CONTRACTOR SHALL VERIFY WATER SUPPLY G.P.M. AND P.S.I. PRIOR TO SYSTEM DESIGN AND CONSTRUCTION.

GENERAL LANDSCAPE NOTES

1. ALL PLANT MATERIAL MUST BE HEALTHY, VIGOROUS, & FREE OF PESTS AND DISEASE.
2. ALL PLANTS MUST BE CONTAINER GROWN OR BALLED & BURLAPPED.
3. ALL TREES MUST HAVE A FULL HEAD, STRAIGHT TRUNK, SINGLE DOMINANT LEADER, & MEET ALL REQUIREMENTS SPECIFIED IN PLANT LIST.
4. ALL PLANTS ARE SUBJECT TO REJECTION BY THE OWNER BEFORE, DURING, & AFTER INSTALLATION.
5. STAKE TREES, IF ENVIRONMENTAL CONDITIONS WARRANT. (I.E. WIND OR STEEP SLOPES)
6. ALL PLANTS & PLANT BEDS MUST BE COMPLETELY MULCHED WITH 3" OF CLEAN, ORGANIC MULCH (PINESTRAW, WOOD CHIPS).
7. PRIOR TO CONSTRUCTION, THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL UNDERGROUND UTILITIES & SHALL AVOID DAMAGE TO ALL UTILITIES DURING THE COURSE OF THE WORK. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY & ALL DAMAGE TO UTILITIES, STRUCTURES, SITE APPURTENANCES, ETC. WHICH OCCURS AS A RESULT OF THE LANDSCAPE CONSTRUCTION, AT NO ADDITIONAL COST TO OWNER.
8. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL QUANTITIES SHOWN ON PLANS, BEFORE PRICING WORK. CONTRACTOR SHALL IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT OF ANY DISCREPANCIES.
9. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING (INCLUDING, BUT NOT LIMITED TO, WATERING, SPRAYING, MULCHING, MOWING, FERTILIZING, ETC.) ALL PLANTED AREAS AND LAWNS UNTIL THE JOB IS ACCEPTED IN FULL, BY THE OWNER.
10. THE OWNER WILL CONTRACT FOR A PROGRAM OF LANDSCAPE MAINTENANCE SERVICES THROUGHOUT THE ONE (1) YEAR GUARANTEE PERIOD UNLESS OTHERWISE DETERMINED.
11. THE CONTRACTOR SHALL COMPLETELY GUARANTEE ALL PLANT MATERIAL FOR A PERIOD OF ONE (1) YEAR BEGINNING AT THE DATE OF TOTAL ACCEPTANCE AND SHALL PROMPTLY MAKE ALL REPLACEMENTS BEFORE OR AT THE END OF THE GUARANTEE PERIOD (AS PER DIRECTION OF THE LANDSCAPE ARCHITECT).
12. THE LANDSCAPE ARCHITECT WILL APPROVE THE STAKED LOCATION OF ALL PLANT MATERIAL PRIOR TO INSTALLATION.
13. DO NOT ALLOW AIR POCKETS TO FORM WHEN BACKFILLING.
14. WATER TREES AFTER PLANTING.
15. MAINTAIN ORIGINAL GRADE OR SLIGHTLY ABOVE GRADE AT THE TREE BASE.
16. DO NOT BREAK ROOT BALL.
17. SET TRUNKS PLUMB
18. ALL DUG TREES IN LEAF SHALL BE ACCLIMATED FOR TWO WEEKS UNDER A MIST SYSTEM, AT THE NURSERY SOURCE, PRIOR TO INSTALLATION.
19. ANY PLANT MATERIAL WHICH DIES, TURNS BROWN, DEFOLIATES OR FAILS TO GERMINATE PRIOR TO TOTAL ACCEPTANCE OF THE WORK SHALL BE PROMPTLY REMOVED FROM THE SITE & REPLACED WITH MATERIAL OF THE SAME SPECIES, QUANTITY, SIZE AND MEETING ALL PLANT LIST SPECIFICATIONS AT NO COST TO THE OWNER.
20. STANDARDS SET FORTH IN THE LATEST EDITION OF "AMERICAN STANDARDS FOR NURSERY STOCK" REPRESENT GUIDELINE SPECIFICATIONS ONLY AND CONSTITUTE MINIMUM QUALITY REQUIREMENTS FOR PLANT MATERIAL OF THE SAME SPECIES, QUANTITY, SIZE AND MEETING ALL PLANT LIST SPECIFICATIONS.
21. IF SUFFICIENT ADDITIONAL TOPSOIL IS AVAILABLE, THE CONTRACTOR SHALL BACKFILL THE PARKING LOT ISLANDS WITH 100% TOPSOIL. PLANTERS SHALL BE FREE OF DELETERIOUS MATERIAL AND SOIL SHALL BE SUITABLE FOR PLANTING. ALL ROCKS AND DEBRIS SHALL BE REMOVED FROM PLANTING BEDS, INCLUDING SODDED AREAS, PRIOR TO INSTALLATION.
22. THE CONTRACTOR HAS THE COMPLETE RESPONSIBILITY FOR THE HANDLING OF ALL SURPLUS EXCAVATED MATERIALS INCLUDING THE REMOVAL OF ANY EXCESS MATERIALS FROM THE PROJECT SITE. THE CONTRACTOR SPECIFICALLY UNDERSTANDS AND AGREES THAT DUE TO THE SEQUENCE OF THE WORK, HE MAY NEED TO RETAIN SELECT EXCAVATED MATERIALS ON SITE TO MEET LATER NEEDS OF THE PROJECT. IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR AS TO ANY DECISIONS MADE TO HAUL OFF EXCESS MATERIAL OR TO RETAIN MATERIAL ON SITE FOR LATER USE. THE CONTRACTOR SHALL HAVE THE COMPLETE RESPONSIBILITY FOR HAVING ADEQUATE, SUITABLE MATERIAL ON-SITE TO REPLACE UNSUITABLE MATERIAL OR TO OTHERWISE CONFORM TO THE REQUIREMENTS OF THE CONTRACT DOCUMENTS.
23. CONTRACTOR SHALL REMOVE & DISPOSE OF ALL PLANT MATERIAL EXISTING ON SITE THAT DOES NOT CONFORM WITH THE LANDSCAPE PLAN. ALL LANDSCAPED AREAS SHALL BE TREATED AS SPECIFIED ON THE LANDSCAPE PLAN OR AS DIRECTED BY THE LANDSCAPE ARCHITECT. THIS SHALL INCLUDE ALL GRASS AREAS USED FOR EROSION CONTROL PURPOSES.
24. GRASS ALL DISTURBED AREAS (INCLUDING RIGHT-OF-WAY), UNLESS OTHERWISE INDICATED. AREAS TO BE SODDED SHALL BE CLEANED OF ALL STONES AND DEBRIS, RAKED SMOOTH AND CONFORM TO PROPOSED GRADES. IF SODDED, SOD SHALL BE ROLLED TO PROVIDE A CONSISTENTLY EVEN SURFACE.
25. CONTRACTOR SHALL DESIGN AND INSTALL AUTOMATIC IRRIGATION SYSTEM TO PROVIDE 100% COVERAGE IN ACCORDANCE WITH SPRINKLER HEAD MANUFACTURER'S SPECIFICATIONS.

PREPARED IN THE OFFICE OF:

GASKINS + LECRAW
a PAPE-DAWSON company
© 2026 GASKINS + LECRAW
3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

#	DATE	DRAWN BY	CHECKED BY
1			

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W0780-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

CALL BEFORE YOU DIG

811
Know what's below.
Call before you dig.

SCALE & NORTH ARROW:

N
NORTH ARROW
DETAILS ARE NOT DRAWN TO SCALE

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	MAT
REVIEWED BY:	TKS
JOB #:	75670007
DATE:	JULY 9, 2026

LANDSCAPE DETAILS

L-1.1

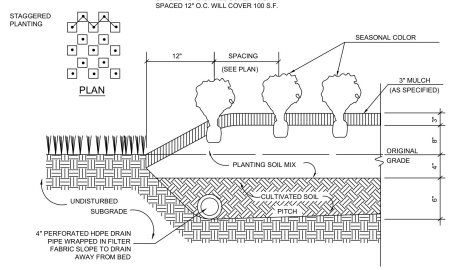

SEASONAL COLOR PLANTING DETAIL

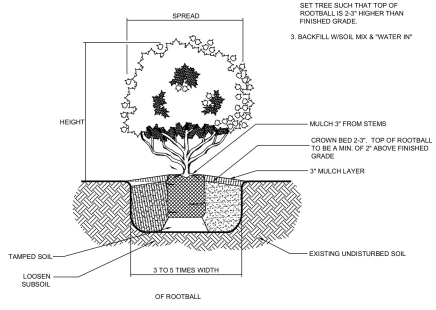

SHRUB & GROUNDCOVER PLANTING DETAIL

NOTE:

1. ATTACH GUYS TO THE CENTRAL LARGEST TRUNK.
2. SPACE STAKES EVENLY AROUND ROOTBALL PIT SUCH THAT WIRES DO NOT COME IN CONTACT WITH ANY TRUNK OR BRANCH.



PLANTING PROCEDURE:

1. EXCAVATE ROOTBALL PIT.
2. ADD EXCAVATED SOIL & TAMP. SET TREE SUCH THAT TOP OF ROOTBALL IS 2-3" HIGHER THAN FINISHED GRADE.
3. BACKFILL W/SOIL MIX & "WATER IN"

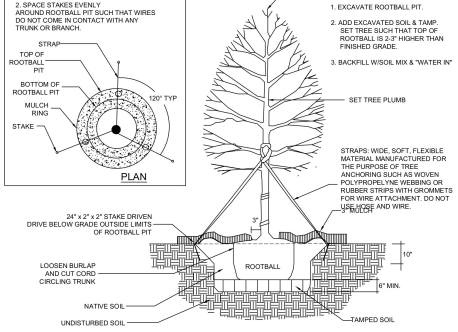

TYPICAL TREE PLANTING DETAIL

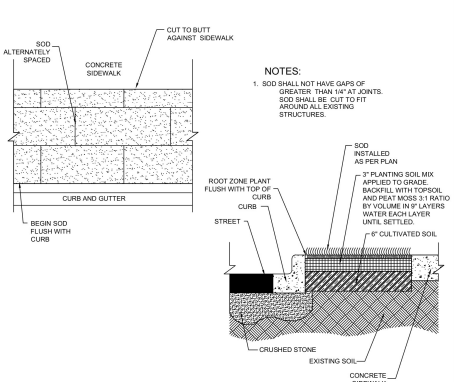

SOD PLACEMENT DETAIL

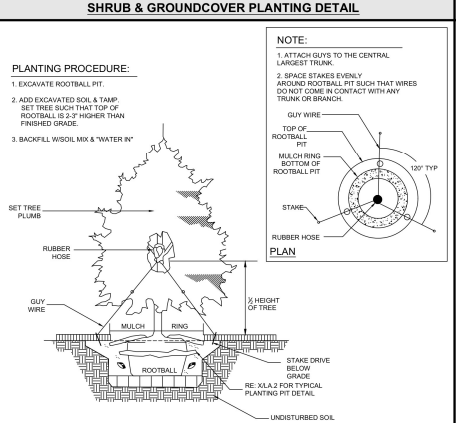

EVERGREEN TREE PLANTING DETAIL

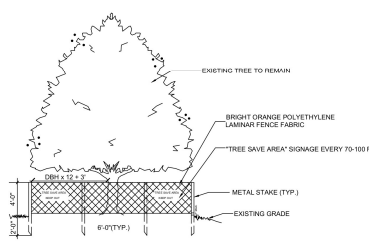

NOTE:
ALL TREE PROTECTION DEVICES ARE TO BE INSTALLED PRIOR TO ANY CONSTRUCTION ACTIVITES BEGIN AND MAINTAINED UNTIL FINAL LANDSCAPE IS INSTALLED. NO PARKING, STORAGE OR OTHER CONSTRUCTION SITE ACTIVITIES ARE TO OCCUR WITHIN THE TREE PROTECTION AREA. ALL TREE PROTECTION FENCING TO BE INSPECTED DAILY AND REPLACE OR REPAIRED AS NEEDED. ALL TREE PROTECTION FENCE MUST BE ACCOMPANIED BY "KEEP OUT" OR "TREE SAVE" SIGNAGE. FENCE LOCATIONS ON PLANS ARE APPROXIMATE AND SHOULD BE INSTALLED TO PROTECT THE CRITICAL ROOT ZONE. FENCING IS TO BE INSTALLED OUTSIDE OF TREE DRIPLINE.

TREE PROTECTION DETAIL

Drawing name: C:\Users\JoeA\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins, GA\CAD\CONSTRUCTION\75670007 - 11 - LANDSCAPE.dwg LANDSCAPE DETAILS Jul 09, 2026 10:53am by JAdams

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company. Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026

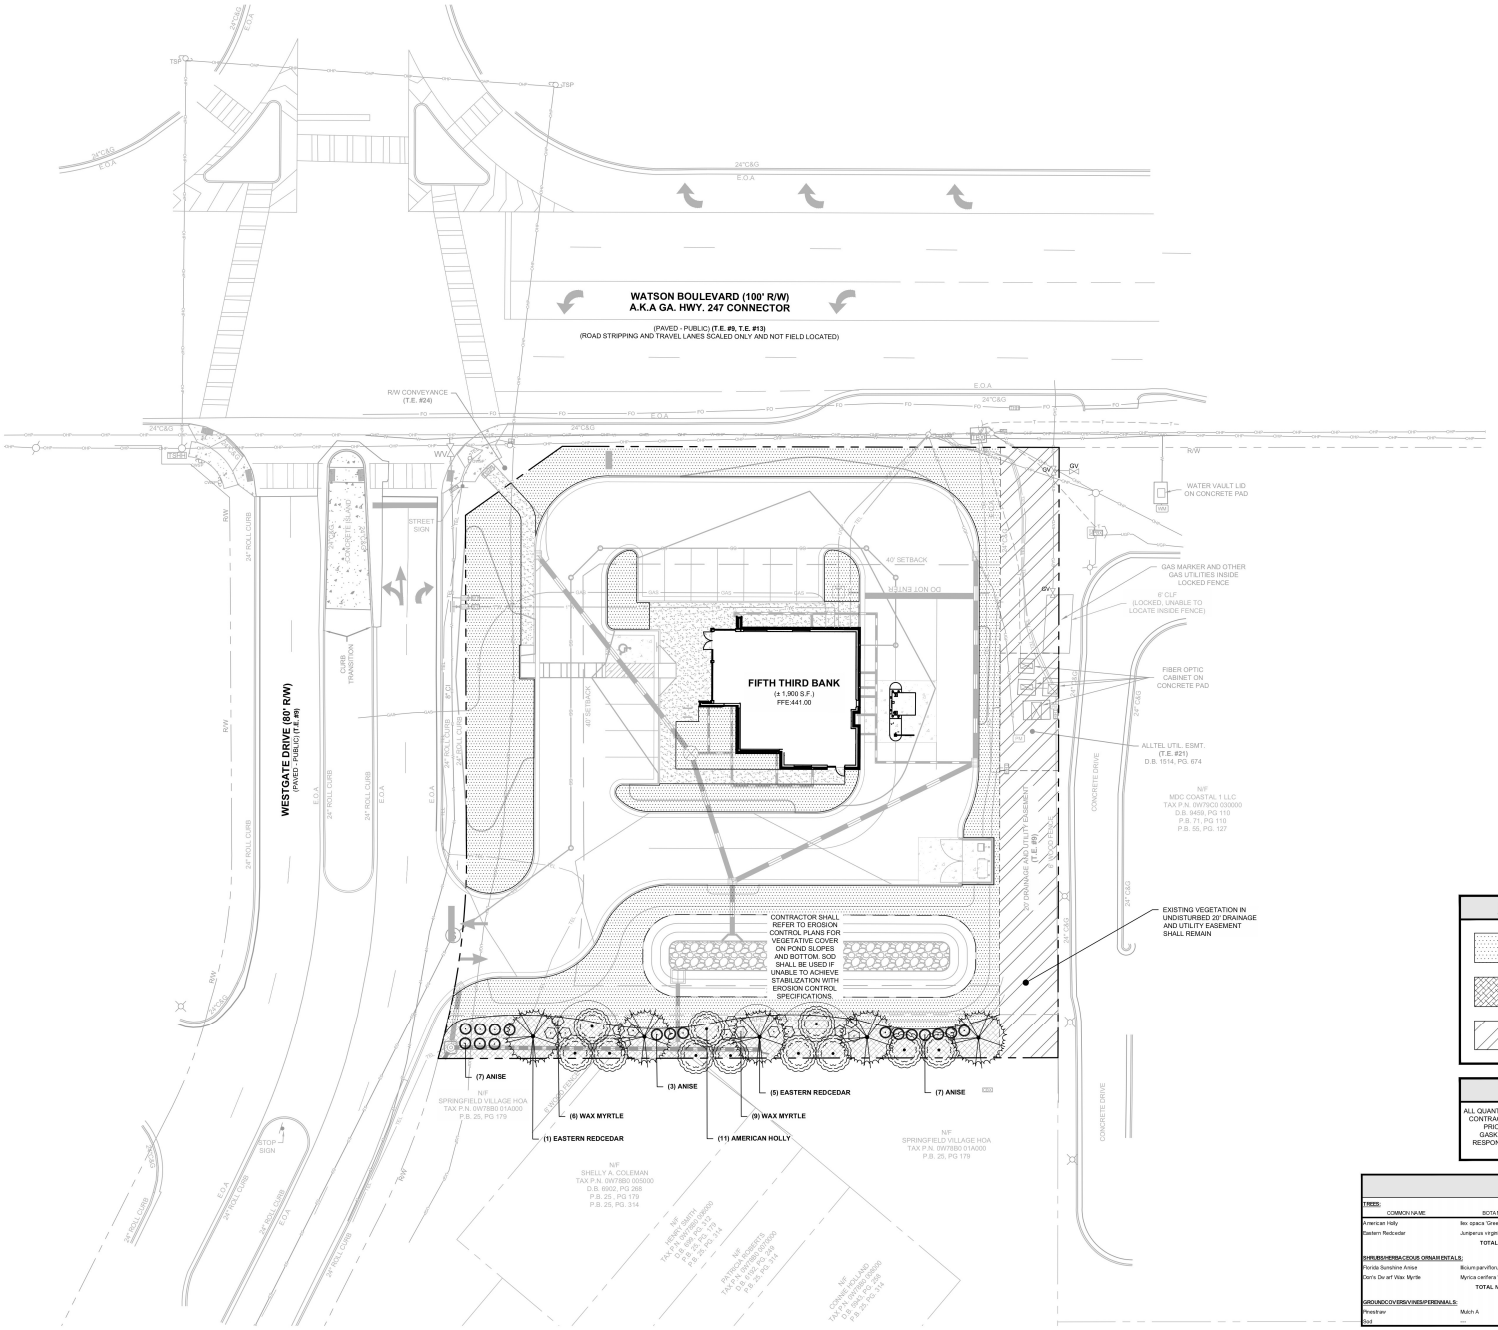

ORDINANCE REQUIREMENTS

15' LANDSCAPE BUFFER
A BUFFER CONSISTING OF A DENSE PLANTING OF TREES AND/OR SHRUBS SHALL BE ESTABLISHED ON A STRIP OF LAND NOT LESS THAN FIFTEEN (15) FEET IN WIDTH OR A FENCE OF SOLID APPEARANCE WITH A MINIMUM HEIGHT OF SIX (6) FEET EIGHT (8) INCHES FROM THE PAVEMENT ON A STRIP OF LAND NOT LESS THAN FIVE (5) FEET ALONG THOSE LOT LINES OF THE PARKING AREAS WHICH ABUT RESIDENTIAL DISTRICTS. IF A PLANTED BUFFER IS USED, IT SHALL BE ESTABLISHED TO A MINIMUM HEIGHT OF SIX (6) FEET WITHIN TWO (2) YEARS OF PLANTING. (SECTION 62.4.4)

SITE SUMMARY

SITE AREA	
SITE AREA:	0.96 ACRES (41,909 S.F.)
IMPERVIOUS AREA:	21,033 S.F. (50.2%)
PERVIOUS AREA:	20,876 S.F. (49.8%)
ZONING CLASSIFICATION	
JURISDICTION:	CITY OF WARNER ROBINS
ZONING:	C-2 (GENERAL COMMERCIAL DISTRICT)
ADJACENT ZONING:	C-2 / R-3
BUILDING SETBACKS	
FRONT:	40'
SIDE:	0'
REAR:	20'
BUILDING SUMMARY	
BUILDING AREA:	1,900 S.F.
BUILDING COVERAGE:	4.5%
PARKING SUMMARY	
PARKING REQ.:	1 SPACE / 300 S.F.
	7 SPACES
PARKING PROV.:	11 SPACES
STANDARD STALL DIMENSIONS:	9' x 18'
MIN. DRIVE WIDTH:	24'

HATCH LEGEND

- SOD / GRASS
- MULCH
- 20' DRAINAGE & UTILITY EASEMENT

NOTE

ALL QUANTITIES ARE FOR A GENERAL GUIDE ONLY. CONTRACTOR SHALL CONFIRM ALL QUANTITIES PRIOR TO BIDDING AND INSTALLATION. GASKINS + LECRAW, INC. SHALL TAKE NO RESPONSIBILITY FOR THE ACCURACY OF THE QUANTITIES PROVIDED.

PLANT LEGEND

SYMBOL	COMMON NAME
TREES	
	AMERICAN HOLLY
	EASTERN REDCEDAR
SHRUBS	
	ANISE
	WAX MYRTLE

PLANT LIST

TREES: COMMON NAME	BOTANICAL NAME	QUANTITY	MIN. SIZE	MIN. SPACING	NOTES
American Holly	Ilex opaca 'Greenleaf'	5	6' HT.	12' O.C.	B&B - HEALTHY, SINGLE LEADER, FULL TO GROUND
Eastern Redcedar	Juniperus virginiana	11	6' HT.	40' O.C.	B&B - HEALTHY, ONE CENTRAL LEADER
	TOTAL NUMBER OF TREES:	16			
SHRUBS/HERBACEOUS ORNAMENTALS:					
Florida Sunshine Anise	Illicium parviflorum 'Florida Sunshine'	17	3 GAL	5' O.C.	FULL, FREE OF PEST & DISEASE
Dan's Dw arf Wax Myrtle	Myrica cerifera 'Dan's Dw arf'	15	3 GAL	5' O.C.	FULL, FREE OF PEST & DISEASE
	TOTAL NUMBER OF SHRUBS:	32			
GROUNDCOVERS/VINES/PERENNIALS:					
Pinestraw	Mulch A	2,500 S.F.			
Sod		11,500 S.F.			

PREPARED IN THE OFFICE OF:
GASKINS + LECRAW
a PAPE-DAWSON company
© 2026 GASKINS + LECRAW
3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

REV. #	DATE	DRAWN BY	CHECKED BY
1			

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W078D-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

GEORGIA REGISTERED LANDSCAPE ARCHITECT 1593 MICHAEL T. SOOTHMER
7/9/26

CALL BEFORE YOU DIG
811 Know what's below. Call before you dig.

SCALE & NORTH ARROW:

NORTH ARROW
0' 10' 20' 40'
SCALE: 1" = 20'

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	JOA
REVIEWED BY:	MAT
JOB #:	75670007
DATE:	JULY 9, 2026

LANDSCAPE PLAN

L-1.0

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company. Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026

Drawing name: C:\Users\JoeA\Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins, GA\CAD\CONSTR\75670007 - 11 - LANDSCAPE.dwg LANDSCAPE PLAN Jul 09, 2026 10:53am by JoeA

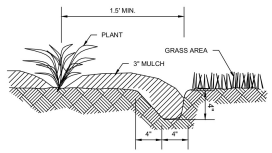

PLANT BED EDGING DETAIL

NOTES

1. LAYOUT PERIMETER PLANTING SPACES AS PER PLAN.
2. FILL IN PLANTING BED WITH TRIANGULAR SPACING.
3. ADJUST AS PER L.A.'S INSTRUCTIONS.

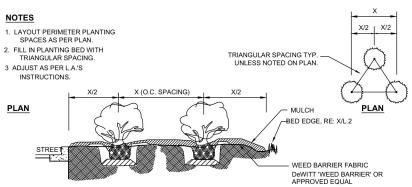

SHRUB & GROUNDCOVER BED DETAIL

NOTE:

1. ATTACH GUYS TO THE CENTRAL LARGEST TRUNK.
2. SPACE STAKES EVENLY AROUND ROOTBALL PIT SUCH THAT WIRES DO NOT COME IN CONTACT WITH ANY TRUNK OR BRANCH.



PLANTING PROCEDURE:

1. EXCAVATE ROOTBALL PIT.
2. ADD EXCAVATED SOIL & TAMP. SET TREE SUCH THAT TOP OF ROOTBALL IS 2-3" HIGHER THAN FINISHED GRADE.
3. BACKFILL W/SOIL MIX & "WATER IN"

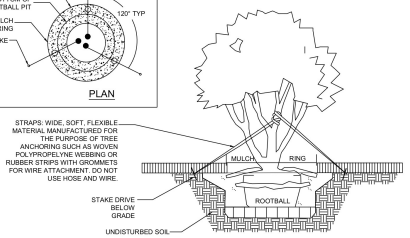

MULTI-TRUNK TREE PLANTING DETAIL

GENERAL IRRIGATION NOTES

1. CONTRACTOR SHALL LOCATE UTILITIES AND SERVICES IN AND AROUND THE SITE PRIOR TO START OF WORK.
2. THE CONTRACTOR SHALL MAKE ALL EFFORTS TO AVOID DAMAGE TO EXISTING STRUCTURES, PAVING, AND UTILITIES.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY REPAIR OF DAMAGE TO ON-SITE UTILITIES, STRUCTURES, OR PAVING RESULTING FROM IRRIGATION CONSTRUCTION. REPAIRS SHALL BE COMPLETED AT NO ADDOTIONAL COST TO THE OWNER.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONFORMING TO ALL CODES AND ORDINANCES RELEVANT TO THE WORK UNDER THIS CONTRACT.
5. ALL WORK SHALL BE SUBJECT TO THE APPROVAL OF THE LANDSCAPE ARCHITECT OR OWNER.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL MATERIALS AND LABOR TO FULLY EXECUTE AND GUARANTEE, AS REQUIRED, ALL WORK IN ACCORDANCE WITH SPECIFICATIONS, AND ALSO AS PER INSTRUCTIONS OF THE LANDSCAPE ARCHITECT AND THE OWNER.
7. CONTRACTOR SHALL USE ONLY NEW, COMMERCIAL GRADE MATERIAL.
8. AUTOMATIC CONTROL CLOCK WILL BE LOCATED ON-SITE BY THE LANDSCAPE ARCHITECT OR OWNER.
9. IRRIGATION DESIGNER SHALL LAYOUT SYSTEM TO MINIMIZE CONFLICTS WITH THE LOCATION OF PROPOSED PLANT MATERIALS (AS SHOWN ON THE PLANTING PLAN) AND OTHER SITE AMENITIES.
10. ALL MAIN LINES SHALL BE INSTALLED A MAXIMUM OF 2' FROM THE BACK OF CURBS WHERE POSSIBLE. LATERALS LINES SHALL BE INSTALLED LIKEWISE WHERE POSSIBLE.
11. THE CONTRACTOR SHALL ADJUST THE RADIUS AND ARC OF EACH HEAD TO MINIMIZE "OVERTHROW" AND TO ELIMINATE "DRY SPOTS." OVERTHROW ONTO PAVED AREAS SHALL NOT BE ALLOWED.
12. ELECTRIC SUPPLY WILL BE STUBBED-OUT AT CONTROL CLOCK LOCATION BY OTHERS. THE IRRIGATION CONTRACTOR SHALL BE RESPONSIBLE FOR ALL ELECTRICAL CONNECTIONS FROM CONTROL VALVES TO THE CONTROL CLOCK.
13. THE ENTIRE SYSTEM SHALL BE UNCONDITIONALLY GUARANTEED BY THE IRRIGATION CONTRACTOR AGAINST ALL DEFECTIVE WORK AND MATERIALS FOR A PERIOD OF ONE YEAR FROM THE DATE OF TOTAL ACCEPTANCE.
14. THE IRRIGATION CONTRACTOR SHALL BE RESPONSIBLE AT TIME OF COMPLETION FOR PROVIDING "AS-BUILT" DRAWINGS, TO INCLUDE LOCATIONS OF ALL VALVES (MANUAL AND AUTOMATIC) WITH TRIANGULATED MEASUREMENTS TO EACH LOCATION AS WELL AS ANY DEVIATIONS IN LOCATION OF PIPING AND HEADS AS REPRESENTED BY THE CONTRACT DOCUMENTS.
15. IT IS THE RESPONSIBILITY OF THE IRRIGATION CONTRACTOR TO HAVE ALL PLANTING AREAS MARKED BY THE LANDSCAPE ARCHITECT OR CONTRACTOR PRIOR TO INSTALLATION.
16. ALL MAINLINES AND LATERAL LINES SHALL BE CLASS 200 PVC.
17. ALL SLEEVES SHALL BE SCHEDULE 40 PVC.
18. CONTRACTOR SHALL SUPPLY: TWO CVC KEYS AND MATCHING HOSE SWIVELS; TWO OF EACH TYPE OF IRRIGATION HEAD; AS-BUILT IRRIGATION PLAN; AND LAMINATED DIAGRAM OF IRRIGATION ZONES.
19. LAWN, SHRUBS/TREES, AND FLOWERS SHALL EACH BE ZONED SEPARATELY.
20. CONTRACTOR SHALL VERIFY WATER SUPPLY G.P.M. AND P.S.I. PRIOR TO SYSTEM DESIGN AND CONSTRUCTION.

GENERAL LANDSCAPE NOTES

1. ALL PLANT MATERIAL MUST BE HEALTHY, VIGOROUS, & FREE OF PESTS AND DISEASE.
2. ALL PLANTS MUST BE CONTAINER GROWN OR BALLED & BURLAPPED.
3. ALL TREES MUST HAVE A FULL HEAD, STRAIGHT TRUNK, SINGLE DOMINANT LEADER, & MEET ALL REQUIREMENTS SPECIFIED IN PLANT LIST.
4. ALL PLANTS ARE SUBJECT TO REJECTION BY THE OWNER BEFORE, DURING, & AFTER INSTALLATION.
5. STAKE TREES, IF ENVIRONMENTAL CONDITIONS WARRANT. (I.E. WIND OR STEEP SLOPES)
6. ALL PLANTS & PLANT BEDS MUST BE COMPLETELY MULCHED WITH 3" OF CLEAN, ORGANIC MULCH (PINESTRAW, WOOD CHIPS).
7. PRIOR TO CONSTRUCTION, THE CONTRACTOR IS RESPONSIBLE FOR LOCATING ALL UNDERGROUND UTILITIES & SHALL AVOID DAMAGE TO ALL UTILITIES DURING THE COURSE OF THE WORK. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY & ALL DAMAGE TO UTILITIES, STRUCTURES, SITE APPURTENANCES, ETC. WHICH OCCURS AS A RESULT OF THE LANDSCAPE CONSTRUCTION, AT NO ADDITIONAL COST TO OWNER.
8. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL QUANTITIES SHOWN ON PLANS, BEFORE PRICING WORK. CONTRACTOR SHALL IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT OF ANY DISCREPANCIES.
9. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING (INCLUDING, BUT NOT LIMITED TO, WATERING, SPRAYING, MULCHING, MOWING, FERTILIZING, ETC.) ALL PLANTED AREAS AND LAWNS UNTIL THE JOB IS ACCEPTED IN FULL, BY THE OWNER.
10. THE OWNER WILL CONTRACT FOR A PROGRAM OF LANDSCAPE MAINTENANCE SERVICES THROUGHOUT THE ONE (1) YEAR GUARANTEE PERIOD UNLESS OTHERWISE DETERMINED.
11. THE CONTRACTOR SHALL COMPLETELY GUARANTEE ALL PLANT MATERIAL FOR A PERIOD OF ONE (1) YEAR BEGINNING AT THE DATE OF TOTAL ACCEPTANCE AND SHALL PROMPTLY MAKE ALL REPLACEMENTS BEFORE OR AT THE END OF THE GUARANTEE PERIOD (AS PER DIRECTION OF THE LANDSCAPE ARCHITECT).
12. THE LANDSCAPE ARCHITECT WILL APPROVE THE STAKED LOCATION OF ALL PLANT MATERIAL PRIOR TO INSTALLATION.
13. DO NOT ALLOW AIR POCKETS TO FORM WHEN BACKFILLING.
14. WATER TREES AFTER PLANTING.
15. MAINTAIN ORIGINAL GRADE OR SLIGHTLY ABOVE GRADE AT THE TREE BASE.
16. DO NOT BREAK ROOT BALL.
17. SET TRUNKS PLUMB
18. ALL DUG TREES IN LEAF SHALL BE ACCLIMATED FOR TWO WEEKS UNDER A MIST SYSTEM, AT THE NURSERY SOURCE, PRIOR TO INSTALLATION.
19. ANY PLANT MATERIAL WHICH DIES, TURNS BROWN, DEFOLIATES OR FAILS TO GERMINATE PRIOR TO TOTAL ACCEPTANCE OF THE WORK SHALL BE PROMPTLY REMOVED FROM THE SITE & REPLACED WITH MATERIAL OF THE SAME SPECIES, QUANTITY, SIZE AND MEETING ALL PLANT LIST SPECIFICATIONS AT NO COST TO THE OWNER.
20. STANDARDS SET FORTH IN THE LATEST EDITION OF "AMERICAN STANDARDS FOR NURSERY STOCK" REPRESENT GUIDELINE SPECIFICATIONS ONLY AND CONSTITUTE MINIMUM QUALITY REQUIREMENTS FOR PLANT MATERIAL OF THE SAME SPECIES, QUANTITY, SIZE AND MEETING ALL PLANT LIST SPECIFICATIONS.
21. IF SUFFICIENT ADDITIONAL TOPSOIL IS AVAILABLE, THE CONTRACTOR SHALL BACKFILL THE PARKING LOT ISLANDS WITH 100% TOPSOIL. PLANTERS SHALL BE FREE OF DELETERIOUS MATERIAL AND SOIL SHALL BE SUITABLE FOR PLANTING. ALL ROCKS AND DEBRIS SHALL BE REMOVED FROM PLANTING BEDS, INCLUDING SODDED AREAS, PRIOR TO INSTALLATION.
22. THE CONTRACTOR HAS THE COMPLETE RESPONSIBILITY FOR THE HANDLING OF ALL SURPLUS EXCAVATED MATERIALS INCLUDING THE REMOVAL OF ANY EXCESS MATERIALS FROM THE PROJECT SITE. THE CONTRACTOR SPECIFICALLY UNDERSTANDS AND AGREES THAT DUE TO THE SEQUENCE OF THE WORK, HE MAY NEED TO RETAIN SELECT EXCAVATED MATERIALS ON SITE TO MEET LATER NEEDS OF THE PROJECT. IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR AS TO ANY DECISIONS MADE TO HAUL OFF EXCESS MATERIAL OR TO RETAIN MATERIAL ON SITE FOR LATER USE. THE CONTRACTOR SHALL HAVE THE COMPLETE RESPONSIBILITY FOR HAVING ADEQUATE, SUITABLE MATERIAL ON-SITE TO REPLACE UNSUITABLE MATERIAL OR TO OTHERWISE CONFORM TO THE REQUIREMENTS OF THE CONTRACT DOCUMENTS.
23. CONTRACTOR SHALL REMOVE & DISPOSE OF ALL PLANT MATERIAL EXISTING ON SITE THAT DOES NOT CONFORM WITH THE LANDSCAPE PLAN. ALL LANDSCAPED AREAS SHALL BE TREATED AS SPECIFIED ON THE LANDSCAPE PLAN OR AS DIRECTED BY THE LANDSCAPE ARCHITECT. THIS SHALL INCLUDE ALL GRASS AREAS USED FOR EROSION CONTROL PURPOSES.
24. GRASS ALL DISTURBED AREAS (INCLUDING RIGHT-OF-WAY), UNLESS OTHERWISE INDICATED. AREAS TO BE SODDED SHALL BE CLEANED OF ALL STONES AND DEBRIS, RAKED SMOOTH AND CONFORM TO PROPOSED GRADES. IF SODDED, SOD SHALL BE ROLLED TO PROVIDE A CONSISTENTLY EVEN SURFACE.
25. CONTRACTOR SHALL DESIGN AND INSTALL AUTOMATIC IRRIGATION SYSTEM TO PROVIDE 100% COVERAGE IN ACCORDANCE WITH SPRINKLER HEAD MANUFACTURER'S SPECIFICATIONS.

PREPARED IN THE OFFICE OF:

GASKINS + LECRAW
a PAPE-DAWSON company
© 2026 GASKINS + LECRAW
3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

#	DATE	DRAWN BY	CHECKED BY
1			

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W0780-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

CALL BEFORE YOU DIG

811
Know what's below.
Call before you dig.

SCALE & NORTH ARROW:

N
NORTH ARROW
DETAILS ARE NOT DRAWN TO SCALE

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	MAT
REVIEWED BY:	TKS
JOB #:	75670007
DATE:	JULY 9, 2026

LANDSCAPE DETAILS

L-1.1

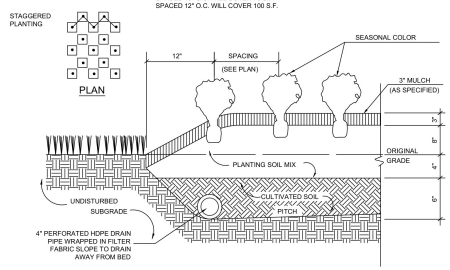

SEASONAL COLOR PLANTING DETAIL

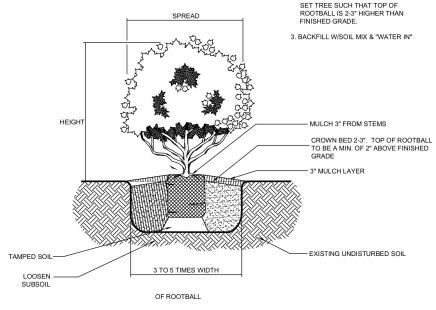

SHRUB & GROUNDCOVER PLANTING DETAIL

NOTE:

1. ATTACH GUYS TO THE CENTRAL LARGEST TRUNK.
2. SPACE STAKES EVENLY AROUND ROOTBALL PIT SUCH THAT WIRES DO NOT COME IN CONTACT WITH ANY TRUNK OR BRANCH.



PLANTING PROCEDURE:

1. EXCAVATE ROOTBALL PIT.
2. ADD EXCAVATED SOIL & TAMP. SET TREE SUCH THAT TOP OF ROOTBALL IS 2-3" HIGHER THAN FINISHED GRADE.
3. BACKFILL W/SOIL MIX & "WATER IN"

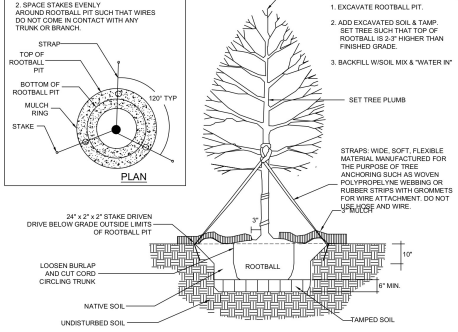

TYPICAL TREE PLANTING DETAIL

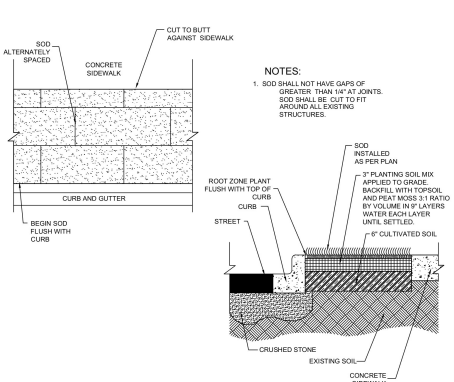

SOD PLACEMENT DETAIL

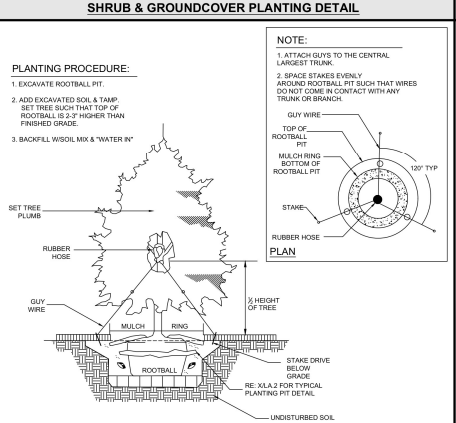

EVERGREEN TREE PLANTING DETAIL

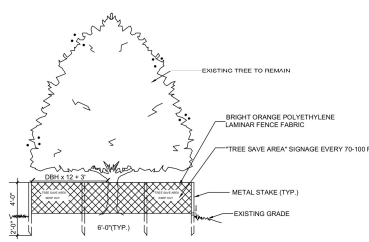

NOTE:
ALL TREE PROTECTION DEVICES ARE TO BE INSTALLED PRIOR TO ANY CONSTRUCTION ACTIVITES BEGIN AND MAINTAINED UNTIL FINAL LANDSCAPE IS INSTALLED. NO PARKING, STORAGE OR OTHER CONSTRUCTION SITE ACTIVITIES ARE TO OCCUR WITHIN THE TREE PROTECTION AREA. ALL TREE PROTECTION FENCING TO BE INSPECTED DAILY AND REPLACE OR REPAIRED AS NEEDED. ALL TREE PROTECTION FENCE MUST BE ACCOMPANIED BY "KEEP OUT" OR "TREE SAVE" SIGNAGE. FENCE LOCATIONS ON PLANS ARE APPROXIMATE AND SHOULD BE INSTALLED TO PROTECT THE CRITICAL ROOT ZONE. FENCING IS TO BE INSTALLED OUTSIDE OF TREE DRIPLINE.

TREE PROTECTION DETAIL

Drawing name: C:\Users\JoeA\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins, GA\CAD\CONSTRUCTION\75670007 - 11 - LANDSCAPE.dwg LANDSCAPE DETAILS Jul 09, 2026 10:53am by JAdams

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company. Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026

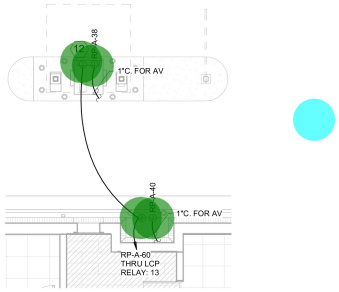

2 E-010 ELECTRICAL POWER & AUXILIARY RDT PLAN
3/16" = 1'-0"

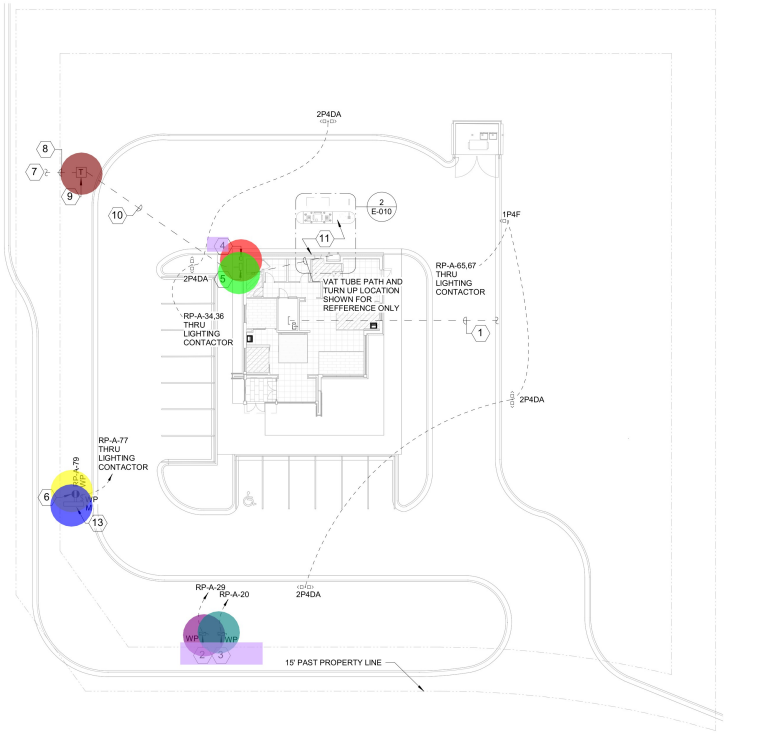

1 E-010 ELECTRICAL SITE PLAN
1" = 20'-0"

SHEET NOTES:

1. COORDINATE ALL SITE CONDUIT ROUTINGS WITH GENERAL CONTRACTOR.
2. REFER TO CIVIL PLANS FOR FINAL LOCATION AND ELECTRICAL REQUIREMENTS OF ALL SIGNAGE, UTILITY CONNECTION POINTS, AND SITE UTILITIES/EQUIPMENT SUCH AS LIFT STATIONS, IRRIGATION PUMPS/CONTROLLERS, HOT BOXES, ETC.
3. ALL UNDERGROUND WIRING SHALL BE LOCATED WITHIN 12" OF BACK OF CURB IN ALL LOCATIONS.
4. BACKFILL, TAMP, AND RESURFACE ALL EXISTING PAVEMENT/ASPHALT AND RESTORE ALL EXISTING LANDSCAPING DISTURBED AS A RESULT OF TRENCHING AND/OR DIRECTIONAL BORING TO ITS ORIGINAL CONDITION.
5. ALL UTILITY SERVICE SHALL BE VERIFIED WITH THE UTILITY COMPANIES PRIOR TO BIDDING AND ALL RESULTING COSTS SHALL BE INCLUDED IN BID
6. ACTUAL INSTALLATION OF ALL UTILITY SERVICES SHALL BE ACCORDING TO FINAL UTILITY COMPANY PLANS.
7. PROVIDE PULLWIRE IN ALL EMPTY CONDUITS.
8. USE JOINT TRENCHING WHEREVER POSSIBLE

KEYED NOTES:

1. ROUTE (2)4"C TO MAIN TELEPHONE SERVICE ENTRANCE. ROUTE TO CLEAR STRUCTURAL FOOTING. CONDUITS SHALL BE STUBBED UP AND CAPPED 12" A.F.F. IN BUILDING. ASBUILT DRAWINGS MUST SHOW CONDUIT LENGTH AND ROUTE
2. IRRIGATION BACKFLOW. VERIFY LOCATION DISCONNECT SHALL BE NEMA 3R.
3. DDCV HOTBOX. VERIFY LOCATION DISCONNECT SHALL BE NEMA 3R.
4. ELECTRIC UTILITY METER. PROVIDE ELECTRIC UTILITY METER PER POWER COMPANY REQUIREMENTS. REFER TO ELECTRICAL RISER DIAGRAM FOR ADDITIONAL INFORMATION. EXACT LOCATION TO BE DETERMINED BY UTILITY COMPANY REPRESENTATIVE IN FIELD.
5. SERVICE DISCONNECT. PROPOSED ELECTRICAL SERVICE DISCONNECT MOUNTED ON BUILDING EXTERIOR. REFER TO ELECTRICAL RISER DIAGRAM FOR ADDITIONAL INFORMATION.
6. MAINTENANCE RECEPTACLE: PROVIDE 120V, 20A, GFCI WEATHER-RESISTANT DUPLEX RECEPTACLE IN WEATHERPROOF SURFACE MOUNTED BELL BOX WITH "EXTRA DUTY WHILE-IN-USE" METALLIC COVER.
7. STUBOUT AND TERMINATE PER UTILITY COMPANY REQUIREMENTS. VERIFY LOCATION OF HIGH VOLTAGE SERVICE POINT PRIOR TO BIDDING AND INCLUDE ALL COST IN BID.
8. (2)5"C FOR HIGH VOLTAGE SERVICE FROM PROPERTY LINE TO TRANSFORMER SLABS VERIFY LOCATION AND ROUTING. HIGH VOLTAGE CONDUIT SHALL BE 48" DEEP. TERMINATE IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS INCLUDING TRENCHING AND BACKFILL TO 90% COMPACTION.
9. TRANSFORMER SLABBOX WITH TRAFFIC GUARDS PER UTILITY COMPANY REQUIREMENTS. VERIFY SIZE, LOCATION AND ORIENTATION WITH UTILITY COMPANY. CONTRACTOR WILL PROVIDE TRANSFORMER SLABS INSTALLED COMPLETE IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS. PROVIDE ADEQUATE GUARD RAILING AROUND POWER TRANSFORMERS IN PARKING AREAS.
10. SECONDARY FROM TRANSFORMER TO MAIN DISCONNECT. VERIFY ROUTING WITH UTILITY COMPANY AND ROUTE TO CLEAR STRUCTURAL FOOTING. SEE RISER DIAGRAM. TERMINATE IN ACCORDANCE WITH PLANS AND SPECIFICATIONS.
11. CANOPY LIGHT FIXTURE: FACTORY INSTALLED CANOPY LIGHT PROVIDED BY KIOSK MANUFACTURER. EC TO COORDINATE WITH THE MANUFACTURER AND MAKE FINAL CONNECTION.
12. DRIVE-THRU ATM: PROVIDE CONDUIT AND WIRING FOR ATM. REFER TO ELECTRICAL FLOOR PLAN ON SHEET E-500 FOR ADDITIONAL INFORMATION.
13. MONUMENT SIGN POWER: COORDINATE EXACT LOCATION OF SIGNAGE STUB-UP WITH SIGN VENDOR AND MAKE FINAL ELECTRICAL CONNECTIONS. PROVIDE 120V, 20A, TOGGLE SWITCH IN METALLIC BELL BOX WITH METALLIC WEATHERPROOF COVER IF DISCONNECT IS NOT FURNISHED WITH MONUMENT SIGN. COORDINATE EXACT LOCATION WITH CIVIL DRAWINGS.

- 2: IRRIGATION BACKFLOW 1.0 EA
- 3:DDCV HOT BOX 1.0 EA
- 4: ELECTRIC UTILITY METER 1.0 EA
- 5: SERVICE DISCONNECT 1.0 EA
- 6: MAINTENANCE RECEPTACLE- PROVIDE 120V,20A, GFCI WEATHER RESISTANT DUP... 1.0 EA
- 13: MONUMENT SIGN POWER 1.0 EA
- 11: KIOSK MANUFACTURE EC TO COORDINATE WITH THE MFR 1.0 EA
- 9: TRANSFORMER SLABBOX WITH TRAFFIC GUARDS 1.0 EA
- JUNCTION BOX 4.0 EA

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 44956 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC
All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.
This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL SITE PLAN AND REMOTE DRIVE THRU

Sheet Number:
E-010

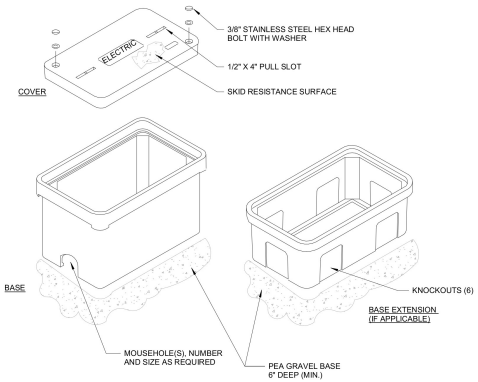

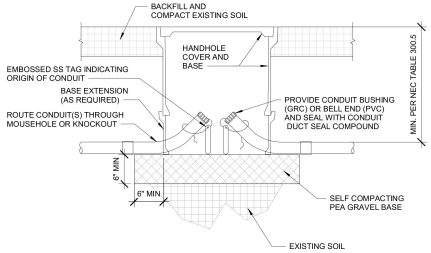

SECTION VIEW OF HAND HOLE

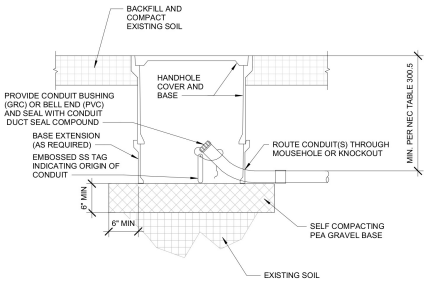

SECTION VIEW OF HAND HOLE (CAPPED SPARE CONDUIT)

NOTES:

1. PROVIDE STANDARD POLYMER CONCRETE HAND HOLE SIZED PER NEC. COVER COLOR SHALL MATCH EXISTING.
2. PROVIDE 1" X 3/8" BELL PULL SLOT FOR EACH HAND HOLE.
3. COVER, RING, BASE, AND BASE EXTENSION SHALL BE MADE OF SAME MATERIAL.
4. PROVIDE IMPRINTED 'ELECTRIC' ON COVER.
5. HAND HOLE SHALL BE INSTALLED IN LANDSCAPE AREAS NOT SUBJECT TO VEHICULAR TRAFFIC.
6. HAND HOLE SHALL BE MIN. TIER 8 RATED.
7. ALL TERMINATIONS SHALL BE MADE USING UNITAP TAP CONNECTORS OR COMPRESSION SPLICE KITS LISTED FOR WET LOCATIONS. TWIST ON WIRE CONNECTORS ARE NOT ACCEPTABLE.
8. ALL DISTURBED SOIL SHALL BE WELL COMPACTED.
9. EACH END OF PULL STRING SHALL BE LABELED TO INDICATE ORIGIN/DESTINATION OF CONDUIT.

1 E-012 HAND HOLE INSTALLED IN LANDSCAPE AREA DETAIL
N.T.S.

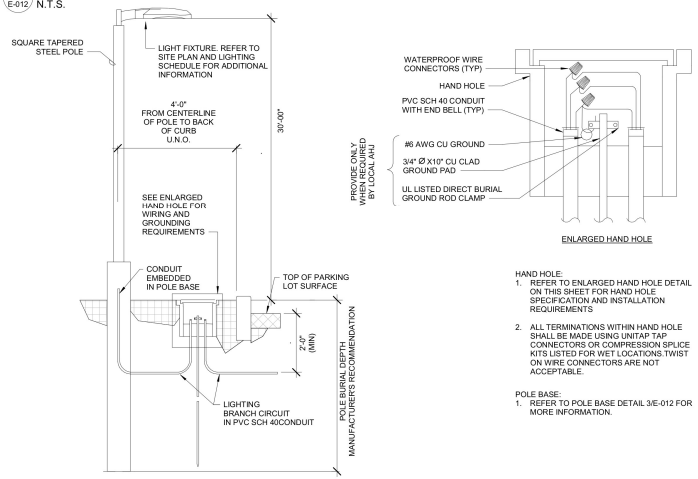

2 E-012 SITE POLE LIGHT DETAIL DIRECT BURIAL - CONCRETE
N.T.S.

ENLARGED HAND HOLE

HAND HOLE:
1. REFER TO ENLARGED HAND HOLE DETAIL ON THIS SHEET FOR HAND HOLE SPECIFICATION AND INSTALLATION REQUIREMENTS
2. ALL TERMINATIONS WITHIN HAND HOLE SHALL BE MADE USING UNITAP TAP CONNECTORS OR COMPRESSION SPLICE KITS LISTED FOR WET LOCATIONS.TWIST ON WIRE CONNECTORS ARE NOT ACCEPTABLE.

POLE BASE:
1. REFER TO POLE BASE DETAIL 3/E-012 FOR MORE INFORMATION.

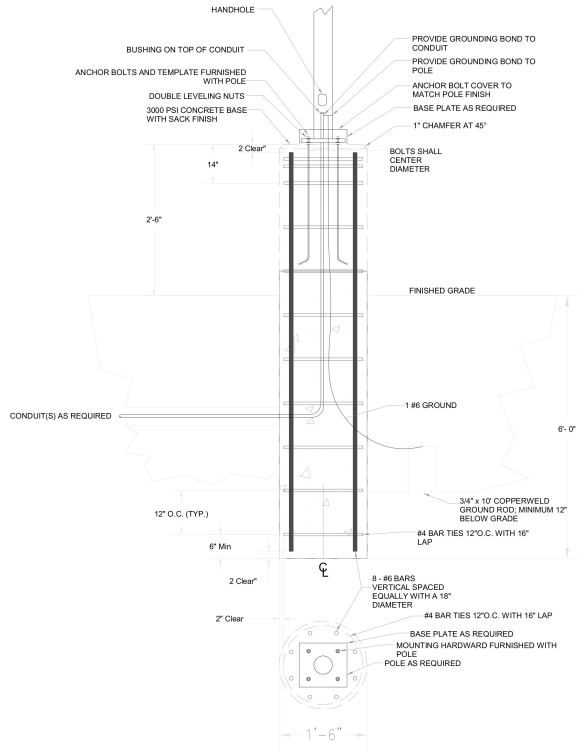

3 E-012 POLE BASE DETAIL
12" = 1'-0"

6/30/2026 2:31:59 PM

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 044504 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON
1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL SITE DETAILS

Sheet Number:
E-012

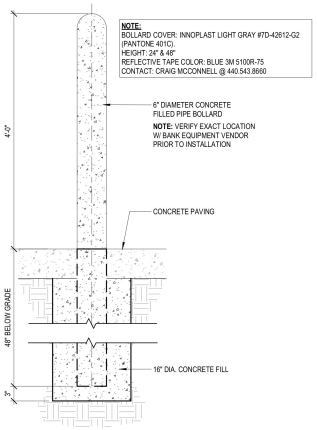

TYPICAL BOLLARD | 1" = 1'-0" | 8

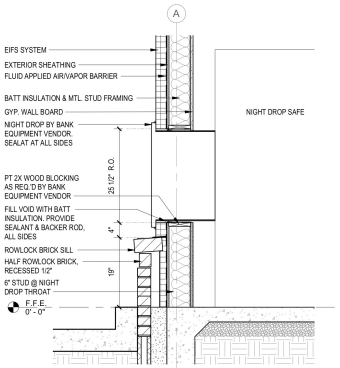

SECTION AT NIGHT DROP | 3/4" = 1'-0" | 7

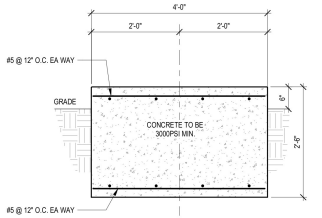

DRIVE-THRU FOUNDATION | 3/4" = 1'-0" | 6

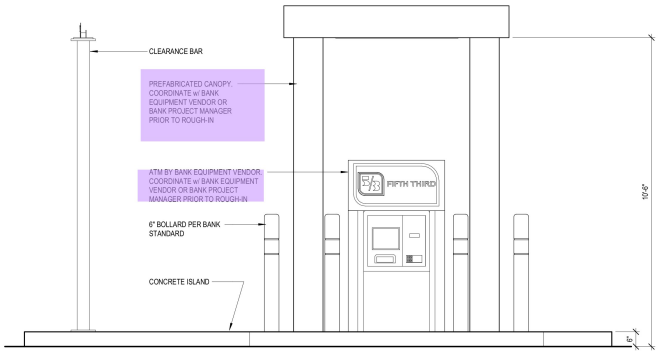

ATM FRONT ELEVATION | 1/2" = 1'-0" | 5

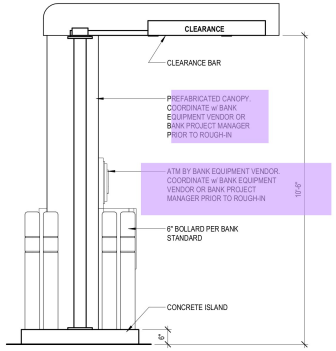

ATM SIDE ELEVATION | 1/2" = 1'-0" | 4

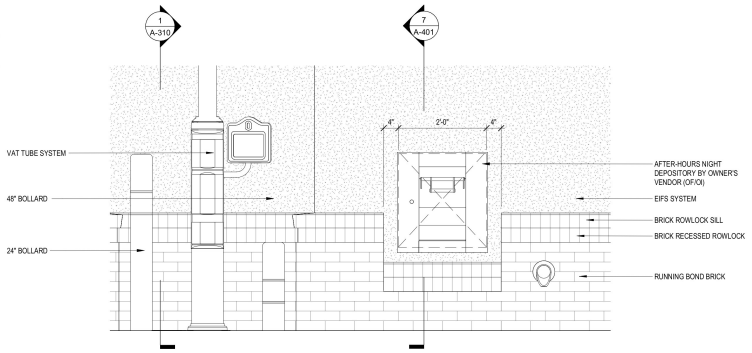

NIGHT DEPOSIT EXTERIOR ELEVATION | 3/4" = 1'-0" | 3

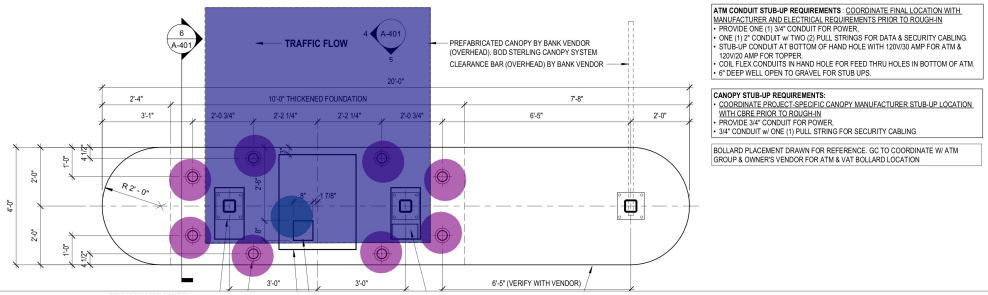

ATM CONDUIT STUB-UP REQUIREMENTS : COORDINATE FINAL LOCATION WITH MANUFACTURER AND ELECTRICAL REQUIREMENTS PRIOR TO ROUGH-IN
- PROVIDE ONE (1) 3/4" CONDUIT FOR POWER.
- ONE (1) 2" CONDUIT w/ TWO (2) PULL STRINGS FOR DATA & SECURITY CABLING.
- STUB-UP CONDUIT AT BOTTOM OF HAND HOLE WITH 120V/30 AMP FOR ATM & 120V/20 AMP FOR TOPPER.
- COIL FLEX CONDUITS IN HAND HOLE FOR FEED THRU HOLES IN BOTTOM OF ATM.
- 6" DEEP WELL OPEN TO GRAVEL FOR STUB UPS.

CANOPY STUB-UP REQUIREMENTS:
- COORDINATE PROJECT-SPECIFIC CANOPY MANUFACTURER STUB-UP LOCATION WITH CBRE PRIOR TO ROUGH-IN
- PROVIDE 3/4" CONDUIT FOR POWER.
- 3/4" CONDUIT w/ ONE (1) PULL STRING FOR SECURITY CABLING

BOLLARD PLACEMENT DRAWN FOR REFERENCE. GC TO COORDINATE W/ ATM GROUP & OWNER'S VENDOR FOR ATM & VAT BOLLARD LOCATION

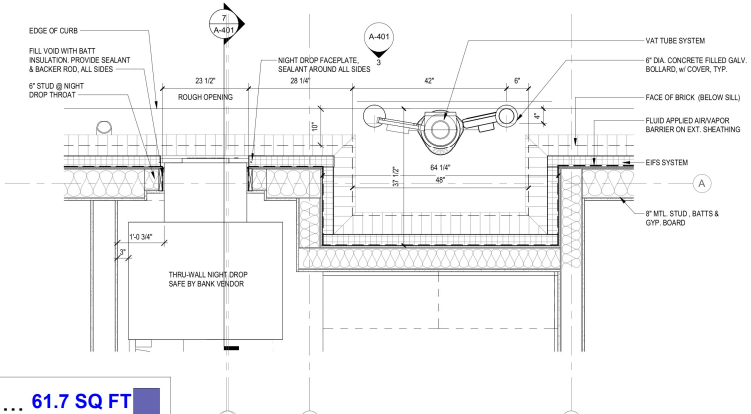

ENLARGED PLAN @ VAT NICHE | 3/4" = 1'-0" | 1

- PREFABRIFATED CANOPY COORDINATE W/ BANK EQUIPMENT VENDER OR BANK ... 61.7 SQ FT
- 6" DIA STEEL BOLLARD & WRAP PER FIFTH THIRD STANDARD 8.0 EA
- ATM BY BANK EQUIPMENT VENDOR COORDINATE W/ VENDOR PRIOR TO INSTALLATI... 1.0 EA

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34561
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall remain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
BANK EQUIPMENT PLANS & DETAILS

Sheet Number:
A-401

EXTERIOR FINISH SCHEDULE

ITEM	EXTERIOR FINISH	MANUFACTURER	COLOR	COMMENTS
ACM-1	ALUMINUM COMPOSITE METAL PANEL	ALCOA ARCHITECTURAL REYNOBOND	CUSTOM FIFTH THIRD BLUE	4MM FR CORE ALUM. COMPOSITE PANEL, DURAGLOSS 3000
ACM-2	ALUMINUM COMPOSITE METAL PANEL	ALCOA ARCHITECTURAL REYNOBOND	CUSTOM FIFTH THIRD GREEN	4MM FR CORE ALUM. COMPOSITE PANEL, DURAGLOSS 3000
ACM-3	ALUMINUM COMPOSITE METAL PANEL	ALCOA ARCHITECTURAL REYNOBOND	ANODIC CLEAR	4MM FR CORE ALUM. COMPOSITE PANEL, COLORWELD 500
AL-1	ANODIZED ALUMINUM	YKK	CLEAR ANODIZED	BASIS OF DESIGN: 2" X 4 1/2" YKK YES45 TU CENTER SET STOREFRONT
EIFS-1	EIFS BARRIER SYSTEM	DRYVIT OUTSULATION PLUS MD	DOVER SKY	3" EIFS SYSTEM - TYP., SANDBLAST FINISH
EIFS-2	EIFS BARRIER SYSTEM	DRYVIT OUTSULATION PLUS MD	DOVER SKY	5" EIFS SYSTEM @ VESTIBULE PARAPET, SANDBLAST FINISH
EPT-1	PAINTED GALVANIZED STEEL GATE	BENJAMIN MOORE	BALBOA MIST - OC27	SEMI-GLOSS @ STEEL, SATIN FINISH @ WALLS
EXT-1	STANDARD MODULAR BRICK VENEER	ACME BRICK	SLATE GRAY	MORTAR MANUFACTURER: COOSA , MORTAR COLOR: OLD LIME PUTTY
GL-1	EXTERIOR GLAZING	VITRO	SOLARBAN 90 ACUITY + ACUITY	ARGON U-0.24, SHCC=0.23
M-1	PREFINISHED METAL COPING	PAC-CLAD	MATCH ACM-3	

GENERAL NOTES

1. ALL DIMENSIONS ARE FROM EXTERIOR FACE OF SHEATHING U.N.O.
2. REFER TO CIVIL PLAN FOR NORTH ORIENTATION
3. EDGE OF DOOR JAMB SHALL BE MINIMUM 4" FROM INTERSECTING WALL UNLESS OTHERWISE NOTED OR AS REQUIRED FOR HARDWARE INSTALLATION.
4. SEE SHEET A-620 FOR PARTITION TYPES.
5. LOCATION AND NUMBER OF FIRE EXTINGUISHERS ARE TO BE INSTALLED PER THE DIRECTION OF THE LOCAL AUTHORITIES AND NFPA 13.
6. ALL INTERIOR FINISHES ARE TO COMPLY WITH THE REQUIREMENTS AS SET FORTH IN THE CURRENT STANDARD EDITION OF ALL GOVERNING CODES, REGULATIONS AND ORDINANCES HAVING JURISDICTION OVER THE SCOPE OF WORK.
7. CONTRACTOR WILL SECURE ALL BUILDING PERMITS & INSPECTIONS NECESSARY FOR THE CONSTRUCTION OF THE PACE.
8. DRAWINGS ARE NOT TO BE SCALED FOR INFORMATION.
9. CONTRACTOR SHALL COORDINATE ALL WOOD BLOCKING, STEEL SUPPORTS AND ANY OTHER ITEMS WHICH ARE IMBEDDED IN DRYWALL PARTITIONS OR ENCLOSURES WHICH RELATE TO HIS WORK OR THE WORK OF ANY SEPARATE CONTRACTORS.ALL WOOD BLOCKING, BRIDGING, BRACING, FRAMING, ETC., SHALL BE FIRE RETARDANT TREATED AS CALLED FOR BY THE GOVERNING BUILDING CODE AND THE CONTRACTOR MUST SUBMIT AFFIDAVITS OF SUCH FIRE TREATMENT TO THE OWNERSHIP.
10. REFER TO EXTERIOR ELEVATIONS AND WINDOW / DOOR SCHEDULE FOR ADDITIONAL STOREFRONT INFORMATION
11. REFERENCE ENGINEERING PLANS FOR PLUMBING, ELECTRICAL EQUIPMENT AND SYSTEMS. CONTRACTOR TO VERIFY AND COORDINATE PLUMBING ROUGH-IN DIMENSIONS WITH PLUMBER.
12. CONTRACTOR TO VERIFY SIZE AND LOCATION OF DRIVE-UP BANKING EQUIPMENT WITH EQUIPMENT VENDOR PRIOR TO CONSTRUCTION
13. CONTRACTOR TO VERIFY SIZE AND LOCATION OF ALL STEEL PIPE BOLLARDS AROUND DRIVE-UP BANKING MACHINES WITH EQUIPMENT VENDOR PRIOR TO CONSTRUCTION
14. CONTRACTOR TO VERIFY ALL ELECTRICAL REQUIREMENTS OF DRIVE-UP BANKING MACHINES PRIOR TO CONSTRUCTION
15. CONTRACTOR TO COORDINATE MAXIMUM EXTERIOR WALL THICKNESS AT NIGHT DROP WITH EQUIPMENT VENDOR
16. CONTRACTOR TO VERIFY ALL REQUIREMENTS, SIZE AND LOCATION OF NIGHT DEPOSIT WITH BANKING EQUIPMENT WITH EQUIPMENT VENDOR PRIOR TO CONSTRUCTION
17. CONTRACTOR TO FRAME FOR DRIVE-UP OPEN / CLOSE RECESSED SIGNAGE. VERIFY SIZE AND REQUIREMENTS WITH OWNER FURNISHED VENDOR.
18. CONTRACTOR TO SET BANKING EQUIPMENT TEMPLATES. EQUIPMENT VENDOR TO VERIFY CORRECT PLACEMENT AND TO COORDINATE WITH CONTRACTOR FOR PROPER PLACEMENT
19. NO ADJUSTMENT TO THE CONTRACT AMOUNT WILL BE GIVEN FOR THE CONTRACTOR NOT FULLY ACQUITTING HIMSELF WITH EQUIPMENT VENDOR REQUIREMENTS.
20. COORDINATE PINK NOISE LOCATION WITH VENDOR. REFER TO ELECTRICAL DRAWINGS.
21. ALL PAINTED STEEL PIPE BOLLARDS ARE TO RECEIVE A BOLLARD COVER TYPICAL
22. ALL INTERIOR DIMENSIONS ARE FROM FINISHED FACE UNLESS INDICATED OTHERWISE.
23. REFER TO SHEET A-600 SERIES FOR DOOR AND WINDOW SCHEDULE ALL DIMENSIONS ARE FROM FINISHED FACE UNLESS INDICATED OTHERWISE.
24. ALL PLYWOOD SHEATHING SHALL BE FRT.

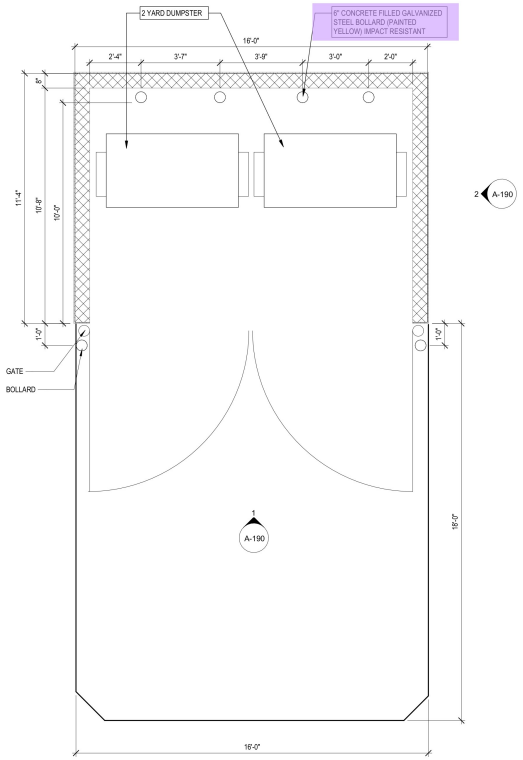

FLOOR PLAN @ TRASH ENCLOSURE | 3/8" = 1'-0" | 4

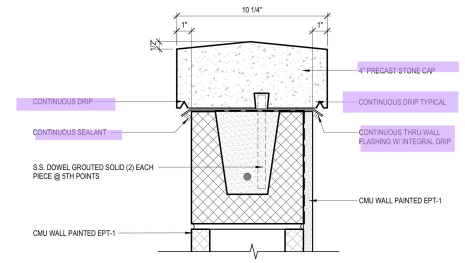

WALL CAP DETAIL | 3" = 1'-0" | 5

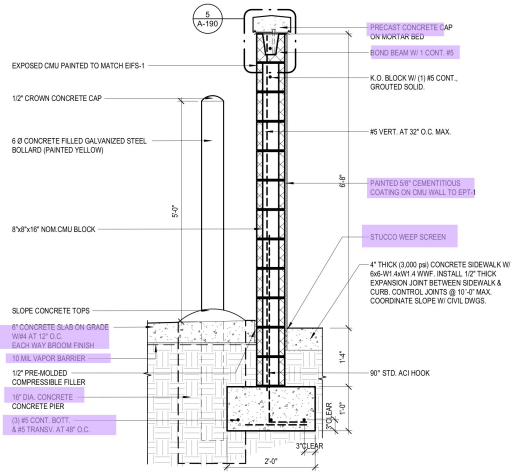

WALL SECTION @ TRASH ENCLOSURE | 3/4" = 1'-0" | 3

FT_TRASH ENCLOSURE KEY NOTES

TAG	DESCRIPTION
TE1	6" DIA. CONCRETE FILLED GALVANIZED STEEL BOLLARD (PAINTED YELLOW)
TE2	6" DIA. STEEL GATE POST WITH SELF CLOSING HINGE (PAINTED TO MATCH PREFINISHED PANEL)
TE3	SIGNAGE "NO PARKING" SHALL MEET SOLID WASTE ORDINANCE
TE4	STEEL CANE BOLT ONE PER GATE (BASIS OF DESIGN: STANLEY HARDWARE #1010) WELD TO STEEL PLATE (4"x14"x1/4") ON GATE
TE5	SUPPORT WHEEL ONE PER GATE BASIS OF DESIGN: GRAINGER #1VJD5 WHEEL

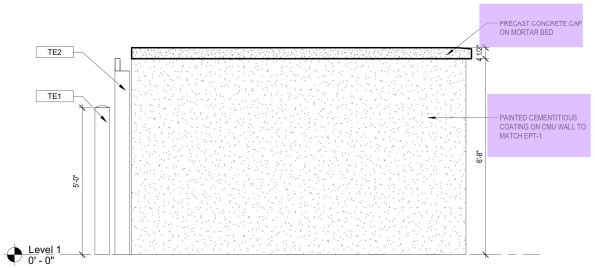

SIDE ELEVATION @ TRASH ENCLOSURE | 1/2" = 1'-0" | 2

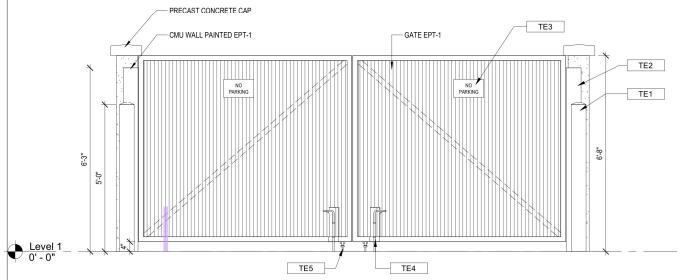

FRONT ELEVATION @ TRASH ENCLOSURE | 1/2" = 1'-0" | 1

NOTE: PROJECT NORTH IS FOR CONSTRUCTION PURPOSES ONLY. REFER TO CIVIL DRAWING FOR TRUE NORTH AND CORRECT BUILDING ORIENTATION AS IT RELATES TO THE SITE.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34856
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
TRASH ENCLOSURE AND DETAILS

Sheet Number:
A-190

7/8/2026 2:37:58 PM

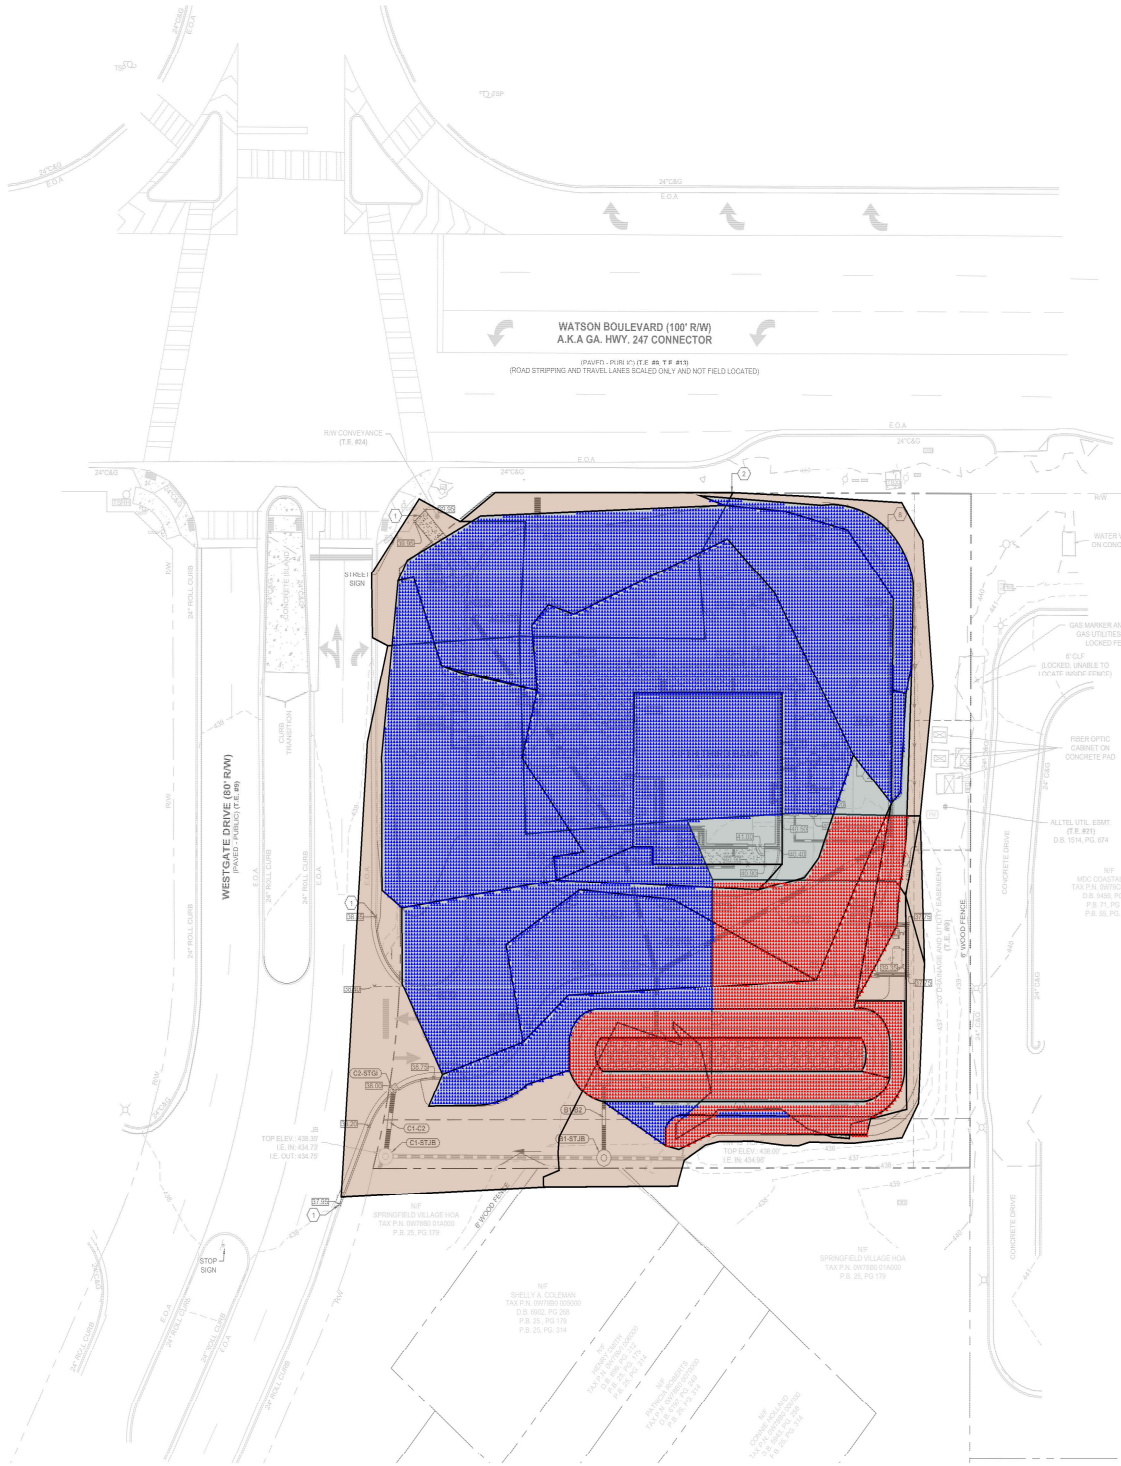

GENERAL GRADING NOTES

1) ALL CRITICAL SPOT GRADES ALONG CURB ARE BOTTOM OF CURB ELEVATIONS UNLESS OTHERWISE SPECIFIED.

2) NO SLOPES ARE TO BE STEEPER THAN 2:1.

3) ALL LAND DISTURBANCE TO BE STABILIZED WITH VEGETATION UPON COMPLETION OF DEMOLITION.

4) BOUNDARY & TOPOGRAPHIC INFORMATION FROM SURVEY BY GASKINS+LECRAW, A PAPE DAWSON COMPANY, DATED 05.08.2026.

5) FLOOD PLAIN IS NOT PRESENT ON THIS SITE AS SHOWN ON THE FEMA FIRM MAP NUMBER 13153C0086E, DATED 09.29.2007.

6) EROSION AND SEDIMENT CONTROL MEASURES ARE TO BE ACCOMPLISHED PRIOR TO ANY OTHER CONSTRUCTION ON THE SITE AND MAINTAINED UNTIL PERMANENT GROUND COVER IS ESTABLISHED.

7) OWNER IS RESPONSIBLE FOR MAINTENANCE OF ALL STORM SEWER ON PRIVATE PROPERTY.

8) THE OWNER IS RESPONSIBLE FOR OBTAINING ANY NECESSARY AGREEMENTS FROM ADJACENT PROPERTY OWNERS IN ORDER TO PERFORM THE REQUIRED OFFSITE WORK, INCLUDING, STORM DRAINAGE, CURB AND GUTTER AND PAVEMENT TIE-INS AND GRADING.

9) VERTICAL DEPTH OF ALL DRY AND PRESSURIZED UTILITIES IS UNKNOWN. CONTRACTOR TO NOTIFY OWNER AND ENGINEER IMMEDIATELY IF ANY CONFLICTS ARE FOUND.

10) SIDEWALKS ADJACENT TO BUILDING AND ALONG ADA ROUTES TO HAVE MAXIMUM CROSS SLOPE OF 2%.

KEY NOTES

1	CONTRACTOR TO TIE INTO AND MATCH EXISTING GRADE
2	RIDGE LINE
3	3:1 SLOPE
4	ADA PARKING AREA, MAXIMUM SLOPE OF 2% IN ANY DIRECTION
5	8" HDPE HEADER PIPE FOR ROOF DRAIN CONNECTION, MINIMUM SLOPE OF 1%
6	5' WIDE DAM, TOP OF DAM ELEVATION: 438.25
7	INFILTRATION BASIN. REFER TO SHEET C-4.2 FOR DETAIL
7	CONTRACTOR TO FINE GRADE 2' WIDE DRAINAGE SWALE @ 1% MIN. SLOPE

SPOT ELEVATION LEGEND

BR: BOTTOM OF RAMP
BW: BOTTOM OF WALL
LP: LOW POINT
TR: TOP OF RAMP
TW: TOP OF WALL
HP: HIGH POINT
*ALL CRITICAL SPOT GRADES ALONG CURB ARE BOTTOM OF CURB ELEVATIONS UNLESS OTHERWISE SPECIFIED.

STRUCTURE TYPES

STSWCB:	GDOT STD 10330	STSWCB:	GDOT STD 10340
STSWCB:	GDOT STD 1019A TYPE A	STYI:	NYOPLAST INLET W/DOME
STGI:	GDOT STD 1019A TYPE E	STFE:	GDOT STD 1120
STHW:	GDOT STD 10018 HEADWALL	STOCS:	SEE DETAILS SHEET C-6.2

DEFINITION OF STRUCTURE SPOT ELEVATIONS

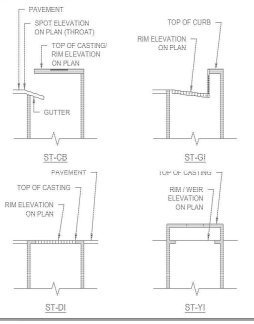

STORM PIPES

NAME:	SIZE:	LENGTH:	SLOPE:	INV UP:	INV DOWN:	MATERIAL:
A1-A2	18"	17.69	0.50%	435.09 (A2-STGI)	435.00 (A1-STHW)	HDPE
A2-A2.1	18"	45.97	0.50%	435.32 (A2.1-STYI)	435.09 (A2-STGI)	HDPE
A2-A3	18"	92.25	0.50%	435.55 (A3-STGI)	435.09 (A2-STGI)	HDPE
A2.1-A2.2	18"	85.26	0.50%	435.74 (A2.2-STGI)	435.32 (A2.1-STYI)	HDPE
A3-A4	18"	70.17	0.50%	435.90 (A4-STGI)	435.55 (A3-STGI)	HDPE
B1-B2	15"	25.11	0.50%	435.00 (B2-STOCS)	434.87 (B1-STJB)	HDPE
C1-C2	18"	21.08	0.50%	434.86 (C2-STGI)	434.75 (C1-STJB)	HDPE

STORM STRUCTURES

NAME:	TYPE:	STATION:	RIM:	INV IN: (PIPE)	INV OUT: (PIPE)
A1-STHW	HEADWALL	0+00.00	435.82	435.00 (A1-A2)	
A2-STGI	HOODED GRATE INLET	0+17.60	438.10	435.09 (A2-A2.1) 435.09 (A2-A3)	435.09 (A1-A2)
A2.1-STYI	YARD INLET	0+45.97	440.00	435.32 (A2.1-A2.2)	435.32 (A2-A2.1)
A2.2-STGI	HOODED GRATE INLET	1+31.22	438.85		435.74 (A2.1-A2.2)
A3-STGI	HOODED GRATE INLET	1+99.95	439.20	435.55 (A3-A4)	435.09 (A2-A3)
A4-STGI	HOODED GRATE INLET	1+80.11	439.20		435.90 (A3-A4)
B1-STJB	JUNCTION BOX	0+00.00	438.25	434.87 (B1-B2)	
B2-STOCS	OUTLET CONTROL STRUCTURE	0+25.11	435.67		435.00 (B1-B2)
C1-STJB	JUNCTION BOX (EXISTING)	0+00.00	438.40	434.75 (C1-C2)	
C2-STGI	HOODED GRATE INLET	0+21.08	436.01		434.00 (C1-C2)

PREPARED IN THE OFFICE OF:
GASKINS +LECRAW
a PAPE-DAWSON company
© 2026 GASKINS + LECRAW
3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

NO.	DATE:	DESIGNED BY:	CHECKED BY:
1			

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W0780-005C00
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

7/9/2026

CALL BEFORE YOU DIG

811
Know what's below.
Call before you dig.

SCALE & NORTH ARROW:

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	MAT
REVIEWED BY:	TKS
JOB #:	752070007
DATE:	JULY 9, 2026

GRADING PLAN

C-4.0

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company, Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026

Drawing name: C:\Users\tkharris\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\752070007 - Praxis3 - Fifth Third - Warner Robins, GA\CAD\DYCINSTR\752070007 - GRADING.dwg GRADING PLAN Jul 09, 2026 11:02am by tkharris

Earthwork Pro Summary

WATSON BLVD - SITE

C-4.0-GRADING-PLAN-Rev.0

Name	Cut Total	Fill Total	Qty
440 - Proposed Contour	CU YD	51.72 CU YD	51.72 CU YD
440 - Proposed Contour	1.78 CU YD	151.02 CU YD	149.24 CU YD
440 - Proposed Contour	CU YD	224.56 CU YD	224.56 CU YD
440 - Proposed Contour	CU YD	199 CU YD	199 CU YD
440 - Proposed Contour	CU YD	2.11 CU YD	2.11 CU YD
440 - Proposed Contour	CU YD	12.81 CU YD	12.81 CU YD
439.5 - Proposed Contour	61.2 CU YD	84.11 CU YD	22.91 CU YD
439.5 - Proposed Contour	15.69 CU YD	CU YD	-15.69 CU YD
439 - Proposed Contour	27.56 CU YD	37.98 CU YD	10.42 CU YD
439 - Proposed Contour	58.96 CU YD	18.35 CU YD	-40.61 CU YD
438 - Proposed Contour	47.33 CU YD	4.59 CU YD	-42.74 CU YD
437 - Proposed Contour	25.2 CU YD	CU YD	-25.2 CU YD
436.5 - Proposed Contour	238.52 CU YD	CU YD	-238.52 CU YD
435 - Proposed Contour	158.17 CU YD	CU YD	-158.17 CU YD
	634.41 CU YD	**786.25 CU YD**	**151.84 CU YD**
Totals	**634.41 CU YD**	**786.25 CU YD**	**151.84 CU YD**