
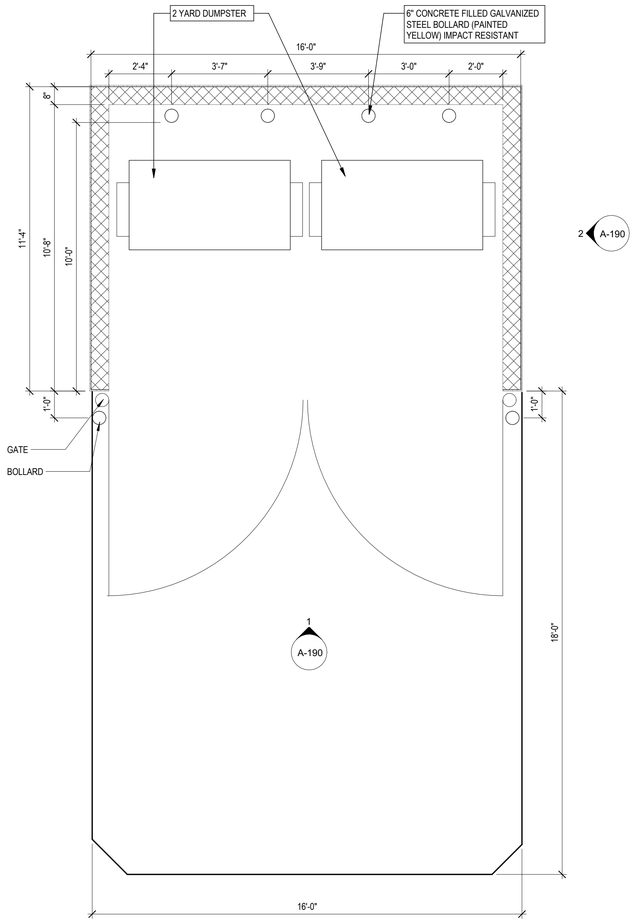



FLOOR PLAN @ TRASH ENCLOSURE | 3/8" = 1'-0" | 4

EXTERIOR FINISH SCHEDULE

ITEM	EXTERIOR FINISH	MANUFACTURER	COLOR	COMMENTS
ACM-1	ALUMINUM COMPOSITE METAL PANEL	ALCOA ARCHITECTURAL REYNOBOND	CUSTOM FIFTH THIRD BLUE	4MM FR CORE ALUM. COMPOSITE PANEL, DURAGLOSS 3000
ACM-2	ALUMINUM COMPOSITE METAL PANEL	ALCOA ARCHITECTURAL REYNOBOND	CUSTOM FIFTH THIRD GREEN	4MM FR CORE ALUM. COMPOSITE PANEL, DURAGLOSS 3000
ACM-3	ALUMINUM COMPOSITE METAL PANEL	ALCOA ARCHITECTURAL REYNOBOND	ANODIC CLEAR	4MM FR CORE ALUM. COMPOSITE PANEL, COLORWELD 500
AL-1	ANODIZED ALUMINUM	YKK	CLEAR ANODIZED	BASIS OF DESIGN: 2" X 4 1/2" YKK YES45 TU CENTER SET STOREFRONT
EIFS-1	EIFS BARRIER SYSTEM	DRYVIT OUTSULATION PLUS MD	DOVER SKY	3" EIFS SYSTEM - TYP., SANDBLAST FINISH
EIFS-2	EIFS BARRIER SYSTEM	DRYVIT OUTSULATION PLUS MD	DOVER SKY	5" EIFS SYSTEM @ VESTIBULE PARAPET, SANDBLAST FINISH
EPT-1	PAINTED GALVANIZED STEEL GATE	BENJAMIN MOORE	BALBOA MIST - OC27	SEMI-GLOSS @ STEEL, SATIN FINISH @ WALLS
EXT-1	STANDARD MODULAR BRICK VENEER	ACME BRICK	SLATE GRAY	MORTAR MANUFACTURER: COOSA , MORTAR COLOR: OLD LIME PUTTY
GL-1	EXTERIOR GLAZING	VITRO	SOLARBAN 90 ACUITY + ACUITY	ARGON U-0.24, SHCC=0.23
M-1	PREFINISHED METAL COPING	PAC-CLAD	MATCH ACM-3	

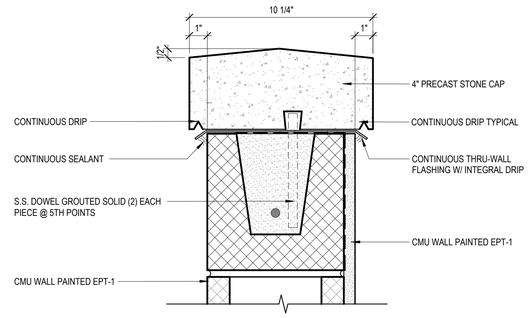

WALL CAP DETAIL | 3" = 1'-0" | 5

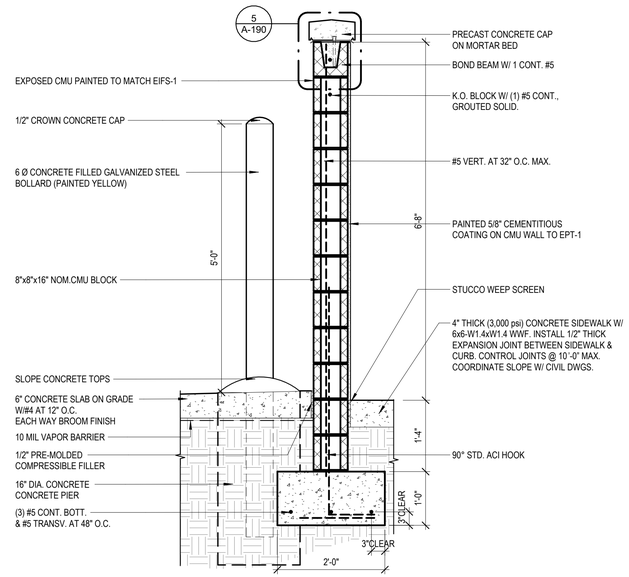


WALL SECTION @ TRASH ENCLOSURE | 3/4" = 1'-0" | 3

GENERAL NOTES


1. ALL DIMENSIONS ARE FROM EXTERIOR FACE OF SHEATHING U.N.O.
2. REFER TO CIVIL PLAN FOR NORTH ORIENTATION
3. EDGE OF DOOR JAMB SHALL BE MINIMUM 4" FROM INTERSECTING WALL UNLESS OTHERWISE NOTED OR AS REQUIRED FOR HARDWARE INSTALLATION.
4. SEE SHEET A-620 FOR PARTITION TYPES.
5. LOCATION AND NUMBER OF FIRE EXTINGUISHERS ARE TO BE INSTALLED PER THE DIRECTION OF THE LOCAL AUTHORITIES AND NFPA 13.
6. ALL INTERIOR FINISHES ARE TO COMPLY WITH THE REQUIREMENTS AS SET FORTH IN THE CURRENT STANDARD EDITION OF ALL GOVERNING CODES, REGULATIONS AND ORDINANCES HAVING JURISDICTION OVER THE SCOPE OF WORK.
7. CONTRACTOR WILL SECURE ALL BUILDING PERMITS & INSPECTIONS NECESSARY FOR THE CONSTRUCTION OF THE PACE.
8. DRAWINGS ARE NOT TO BE SCALED FOR INFORMATION.
9. CONTRACTOR SHALL COORDINATE ALL WOOD BLOCKING, STEEL SUPPORTS AND ANY OTHER ITEMS WHICH ARE IMBEDDED IN DRYWALL PARTITIONS OR ENCLOSURES WHICH RELATE TO HIS WORK OR THE WORK OF ANY SEPARATE CONTRACTORS.ALL WOOD BLOCKING, BRIDGING, BRACING, FRAMING, ETC., SHALL BE FIRE RETARDANT TREATED AS CALLED FOR BY THE GOVERNING BUILDING CODE AND THE CONTRACTOR MUST SUBMIT AFFIDAVITS OF SUCH FIRE TREATMENT TO THE OWNERSHIP.
10. REFER TO EXTERIOR ELEVATIONS AND WINDOW / DOOR SCHEDULE FOR ADDITIONAL STOREFRONT INFORMATION
11. REFERENCE ENGINEERING PLANS FOR PLUMBING, ELECTRICAL EQUIPMENT AND SYSTEMS. CONTRACTOR TO VERIFY AND COORDINATE PLUMBING ROUGH-IN DIMENSIONS WITH PLUMBER.
12. CONTRACTOR TO VERIFY SIZE AND LOCATION OF DRIVE-UP BANKING EQUIPMENT WITH EQUIPMENT VENDOR PRIOR TO CONSTRUCTION
13. CONTRACTOR TO VERIFY SIZE AND LOCATION OF ALL STEEL PIPE BOLLARDS AROUND DRIVE-UP BANKING MACHINES WITH EQUIPMENT VENDOR PRIOR TO CONSTRUCTION
14. CONTRACTOR TO VERIFY ALL ELECTRICAL REQUIREMENTS OF DRIVE-UP BANKING MACHINES PRIOR TO CONSTRUCTION
15. CONTRACTOR TO COORDINATE MAXIMUM EXTERIOR WALL THICKNESS AT NIGHT DROP WITH EQUIPMENT VENDOR
16. CONTRACTOR TO VERIFY ALL REQUIREMENTS, SIZE AND LOCATION OF NIGHT DEPOSIT WITH BANKING EQUIPMENT WITH EQUIPMENT VENDOR PRIOR TO CONSTRUCTION
17. CONTRACTOR TO FRAME FOR DRIVE-UP OPEN / CLOSE RECESSED SIGNAGE. VERIFY SIZE AND REQUIREMENTS WITH OWNER FURNISHED VENDOR.
18. CONTRACTOR TO SET BANKING EQUIPMENT TEMPLATES. EQUIPMENT VENDOR TO VERIFY CORRECT PLACEMENT AND TO COORDINATE WITH CONTRACTOR FOR PROPER PLACEMENT
19. NO ADJUSTMENT TO THE CONTRACT AMOUNT WILL BE GIVEN FOR THE CONTRACTOR NOT FULLY ACQUITTING HIMSELF WITH EQUIPMENT VENDOR REQUIREMENTS.
20. COORDINATE PINK NOISE LOCATION WITH VENDOR. REFER TO ELECTRICAL DRAWINGS.
21. ALL PAINTED STEEL PIPE BOLLARDS ARE TO RECEIVE A BOLLARD COVER TYPICAL
22. ALL INTERIOR DIMENSIONS ARE FROM FINISHED FACE UNLESS INDICATED OTHERWISE.
23. REFER TO SHEET A-600 SERIES FOR DOOR AND WINDOW SCHEDULE ALL DIMENSIONS ARE FROM FINISHED FACE UNLESS INDICATED OTHERWISE.
24. ALL PLYWOOD SHEATHING SHALL BE FRT.

FT_TRASH ENCLOSURE KEY NOTES

TAG	DESCRIPTION
TE1	6" DIA. CONCRETE FILLED GALVANIZED STEEL BOLLARD (PAINTED YELLOW)
TE2	6" DIA. STEEL GATE POST WITH SELF CLOSING HINGE (PAINTED TO MATCH PREFINISHED PANEL)
TE3	SIGNAGE "NO PARKING" SHALL MEET SOLID WASTE ORDINANCE
TE4	STEEL CANE BOLT ONE PER GATE (BASIS OF DESIGN: STANLEY HARDWARE #1010) WELD TO STEEL PLATE (4"x14"x1/4") ON GATE
TE5	SUPPORT WHEEL ONE PER GATE BASIS OF DESIGN: GRAINGER #1VJD5 WHEEL

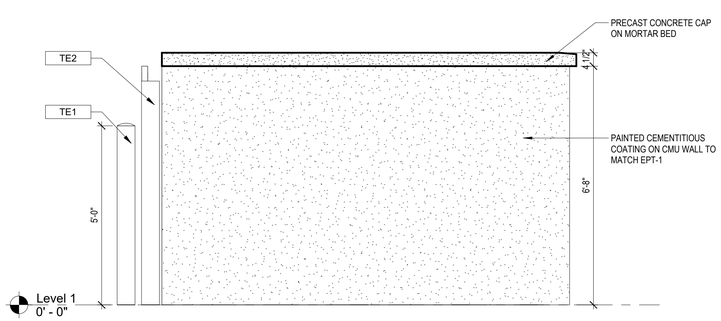

SIDE ELEVATION @ TRASH ENCLOSURE | 1/2" = 1'-0" | 2

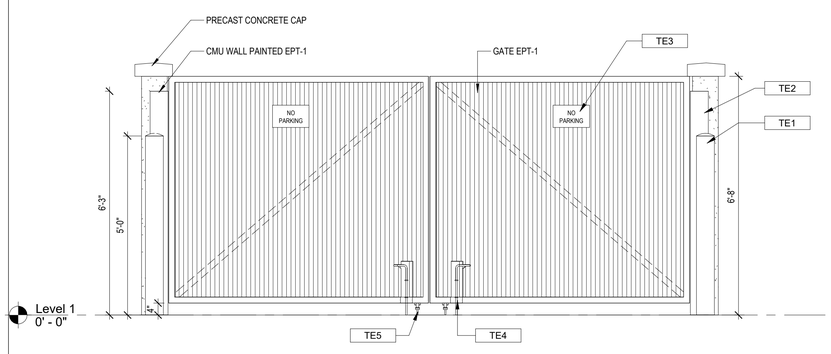

FRONT ELEVATION @ TRASH ENCLOSURE | 1/2" = 1'-0" | 1

NOTE: PROJECT NORTH IS FOR CONSTRUCTION PURPOSES ONLY. REFER TO CIVIL DRAWING FOR TRUE NORTH AND CORRECT BUILDING ORIENTATION AS IT RELATES TO THE SITE.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 3457
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
TRASH ENCLOSURE AND DETAILS

Sheet Number:
A-190

7/8/2026 2:37:58 PM