
DOOR SCHEDULE

MARK	ROOM NAME	DOOR TYPE	DOORS SIZES WIDTH	DOORS SIZES HEIGHT	THICKNESS	DOOR MATERIAL	FRAME MATERIAL	HRDW SET NO.	COMMENTS
100	WEATHER VESTIBULE	D	6' - 0"	8' - 0"		GLASS	ALUM	1	CARD READER AND POWER ASSIST BUTTON
101	ENTRY	D	6' - 0"	8' - 0"		GLASS	ALUM	4	AUTO OPERATOR BUTTON
105	MEETING ROOM	F	3' - 4"	7' - 0"		GLASS	ALUM	14	32.34" CLEAR OPENING. GC PURCHASE AND COORDINATE WITH FIFTHTHIRDSUPPORT@DIRTT.COM
106	ELEC./I.T.	B	3' - 0"	7' - 0"		SCW	HM	7	CARD READER
110	EMPLOYEE LOUNGE	E	3' - 0"	8' - 0"		GLASS	ALUM	3	CARD READER
111	WORK ROOM	C	3' - 0"	7' - 0"		SCW	HM	6	CARD READER, KNOCK DOWN FRAME
112	WOMENS	B	3' - 0"	7' - 0"		SCW	HM	11	1" UNDERCUT
113	MENS	B	3' - 0"	7' - 0"		SCW	HM	11	1" UNDERCUT
114	PHONE ROOM	B	3' - 0"	7' - 0"		SCW	HM	10	
115	JANITOR	B	3' - 0"	7' - 0"		SCW	HM	9	CARD READER, 1" UNDERCUT
xxx		H	3' - 0"	1' - 0 5/8"					

DOOR TYPES

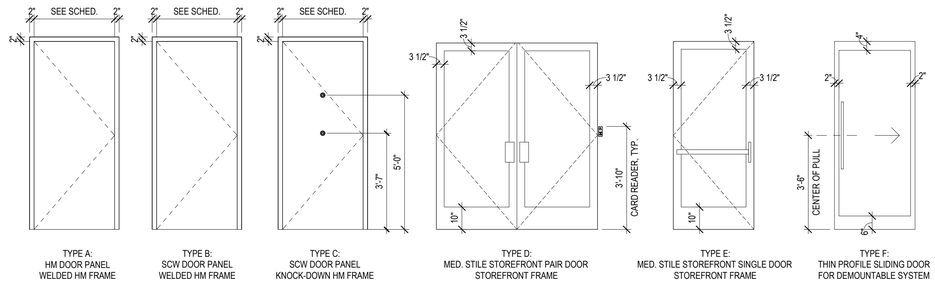

TYPE A: HM DOOR PANEL WELDED HM FRAME

TYPE B: SCW DOOR PANEL WELDED HM FRAME

TYPE C: SCW DOOR PANEL KNOCK-DOWN HM FRAME

TYPE D: MED. STILE STOREFRONT PAIR DOOR STOREFRONT FRAME

TYPE E: MED. STILE STOREFRONT SINGLE DOOR STOREFRONT FRAME

TYPE F: THIN PROFILE SLIDING DOOR FOR DEMOUNTABLE SYSTEM

GENERAL NOTES - DOORS & FRAMES

1. WOOD DOOR FINISH AS SCHEDULED ON FINISH PLAN
2. CAULK DOOR JAMBS AND HEADS AT ALL DOORS LOCATED IN WALLS TO BE SOUND INSULATED AND ANYWHERE THAT GAPS BETWEEN WALL AND FRAME EXCEEDS 1/16"
3. HOLLOW METAL DOOR FRAMES TO BE FULLY WELDED FRAMES UNLESS NOTED OTHERWISE.
4. EXTERIOR HOLLOW METAL DOORS AND FRAMES SHALL BE GALVANIZED AND PAINTED.
5. PROVIDE ANCHORS AND ACCESSORIES AS REQ'D FOR CONDITIONS AS RECOMMENDED BY THE MANUFACTURER. MINIMUM TYPICAL INSTALLATION REQUIRES THREE (3) JAMB ANCHORS AND ONE (1) BASE ANCHOR PER JAMB AT GYP. BOARD PARTITIONS.
6. DOORS SHALL OPERATE FREELY WITHOUT BINDING.
7. FRAME ROUGH OPENINGS AS RECOMMENDED BY METAL STUD MFR. AND DOOR FRAME MFR.
8. DOOR FRAMES SHALL BE SECURED RIGIDLY IN PLACE AND BRACED TO FLOOR AND STRUCTURE ABOVE TO PREVENT BREAK OUT TO PARTITIONS.
9. DOORS TO BE LOCATED 6" FROM FACE OF WALL INCLUDING DOOR FRAME, UNLESS NOTED OTHERWISE.
10. ERECT ALL DOOR FRAMES AND ADJACENT WALLS TO CONFORM TO THE APPLICABLE PLAN CONFIGURATION. NOTIFY ARCHITECT OF ANY CONFLICTS PRIOR TO INSTALLATION OF DOOR FRAMES AND ADJACENT WALLS DURING TRACK LAYOUT.
11. COORDINATE WITH SECURITY SYSTEM, SECURITY RISER DIAGRAM AND FIRE ALARM SYSTEM.
12. CONFIGURE CURTAIN WALL / STOREFRONT SYSTEM TO ACCOMMODATE CONDUIT FOR SECURITY DEVICES.
13. DOOR UNDERCUTS SHALL BE KEPT TO A MINIMAL DIMENSION AND SHALL BE UNIFORM THROUGHOUT PROJECT, UNLESS NOTED OTHERWISE.
14. BOTH SIDES OF ALL EXTERIOR DOORS SHALL HAVE THE SAME ELEVATION WITH NO MORE THAN 1/2" DIFFERENCE ON EITHER SIDE.
15. INSTALLATION OF ALL DOORS AND HARDWARE SHALL MEET MINIMUM ADA REQUIREMENTS.

GENERAL NOTES - HARDWARE

1. CONTINUOUS HINGES ARE LISTED IN THE HW SETS; STAINLESS STEEL BUTT HINGES/OFFSET PIVOTS ARE ACCEPTABLE ON INTERIOR DOORS ONLY.
2. FLORIDA PROJECTS: PANIC EXIT HARDWARE ON EXTERIOR ALUMINUM DOORS SUBJECT TO CHANGE BASED ON DOOR SYSTEM MANUFACTURER 'S REQUIREMENTS. HARDWARE MUST BE REVIEWED BY ARCHITECT PRIOR TO ORDER.

ALL DOOR HARDWARE TO BE PURCHASED FROM LOCKNET OR ALARM DETECTION SYSTEMS, BASED ON PROJECT LOCATION. GC TO FURNISH FOR INSTALLATION

- COVERAGE AREAS:
  a. ALL OF ILLINOIS AND NW INDIANA: ALARM DETECTION SYSTEM: dsirek@adsalarm.com
  b. ALL PROJECTS OUTSIDE OF ILLINOIS AND NW INDIANA: LOCKNET: 53Retail@LockNet.com

CYLINDERS AND KEYING

- Permanent KIL, Mortise & Rim Lock Cylinders: Proprietary Medeco cylinders furnished by Owner, installed by Contractor at later date.
- Temporary Cylinders: Manufacturers' standard cylinders / keyway to match across all cylinder types.
- Bored locks: Standard KIL cylinders in keyway to match Rim & Mortise cylinders.
- Rim & Mortise cylinders: Complete fixed core cylinders in keyway to match bored locks.
- Keyway: Supply locks complete with manufacturers standard cylinders, construction keyed.
- Key Quantity: Provide the following minimum number of keys:
  - Construction Keys (where required): Ten (10).
  - Construction Keying: Provide manufacturers standard keyed cylinders, bitted for construction keying.

ACCEPTABLE MFRS


- Locksets: Sargent – "L" Lever – No Substitutions
- Exit Devices: Sargent 8000 Series – No Substitutions
- Door Closers: Sargent 281 Series – No Substitutions
- Automatic Operators – Norton 6000 – No Substitutions
- Electric Strikes: HES 1500 / 5000 / 5200 / 9000 Series – No Substitutions

ABBREVIATION LEGEND


PE	Pemko
SA	Sargent
MC	Medeco Cylinder
RO	Rockwood
RF	Rixson
NO	Norton
BEA	BEA
SU	Securitron
VD	Von Duprin
HS	HES
MK	McKinney
DT	DIRTT
OT	by Others

GENERAL NOTES - ADA

1. DOOR THRESHOLD SHALL BE 1/2"" HIGH MAX WITH SLOPE 1:2 MAX. RAISED THRESHOLDS TO COMPLY WITH 302 AND 303 (404.2.5, 302, 303)
2. DOUBLE DOORS - AT LEAST (1) ACTIVE LEAF OF A DOORWAY TO PROVIDE 32"" MIN CLEAR OPENING WIDTH. (402.2.2, 403.2.3)
3. SWINGING DOOR SURFACES WITHIN 10"" FROM FINISH FLOOR MEASURED VERTICALLY TO HAVE A SMOOTH SURFACE ON THE PUSH SIDE EXTENDING THE FULL WIDTH OF THE DOOR. PARTS CREATING HORIZONTAL OR VERTICAL JOINTS IN THESE SURFACES TO BE WITHIN 1/16" OF THE SAME PLANE AS THE OTHER. CAVITIES CREATED BY ADDED KICK PLATES SHALL BE CAPPED. EXCEPTIONS: 1) SLIDING DOORS ARE NOT REQUIRED TO COMPLY WITH 404.2.10; 2) TEMPERED GLASS DOORS WITHOUT STILES AND HAVING A BOTTOM RAIL OR SHOE WITH THE TOP LEADING EDGE TAPERED AT 60 DEGREES MINIMUM FROM THE HORIZONTAL SHALL NOT BE REQUIRED TO MEET THE 10"" BOTTOM SMOOTH SURFACE HEIGHT REQUIREMENT (ADA 404.2.10)
4. DOOR HARDWARE TO BE OPERABLE WITH ONE HAND AND SHALL NOT REQUIRE TIGHT GRASPING, PINCHING, OR TWISTING OF THE WRIST (309.4)
5. OPERABLE PARTS SUCH AS DOOR HARDWARE TO BE MOUNTED 34" MIN AND 48" MAX AFF. WHERE SLIDING DOORS ARE IN THE FULLY OPEN POSITION, OPERATING HARDWARE SHALL BE EXPOSED AND USABLE FROM BOTH SIDES (404.2.7)
6. DOOR CLOSERS TO BE ADJUSTED SO THAT FROM THE OPEN POSITION OF 90 DEGREES, THE TIME REQUIRED TO MOVE THE DOOR TO A POSITION OF 12 DEGREES FROM THE LATCH IS 5 SECONDS MIN (404.2.8)
7. THE FORCE FOR PUSHING OR PULLING OPEN A DOOR OR GATE OTHER THAN FIRE DOORS ARE AS FOLLOWS: A) INTERIOR HINGED DOORS AND GATES REQUIRE 5 LBS MAXIMUM FORCE TO OPEN. B) SLIDING AND FOLDING DOORS REQUIRE 5 LBS MAXIMUM FORCE TO OPEN. THESE FORCES DO NOT APPLY TO THE FORCE REQUIRED TO RETRACT LATCH BOLTS OR DISENGAGE OTHER DEVICES THAT HOLD THE DOOR IN A CLOSED POSITION. (ADA 404.2.9)

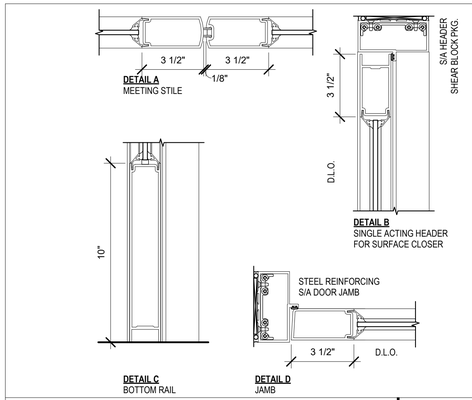


DOORS - STORFRONT DETAILS | 3" = 1'-0" | 8

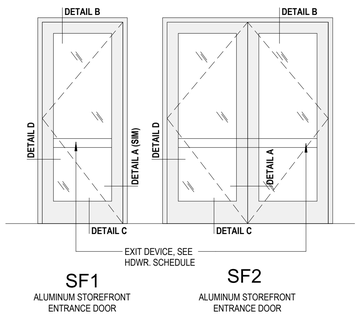

SF1
ALUMINUM STOREFRONT ENTRANCE DOOR

SF2
ALUMINUM STOREFRONT ENTRANCE DOOR

ELEVATION - STOREFRONT ENTRANCES | 3/8" = 1'-0" | 7

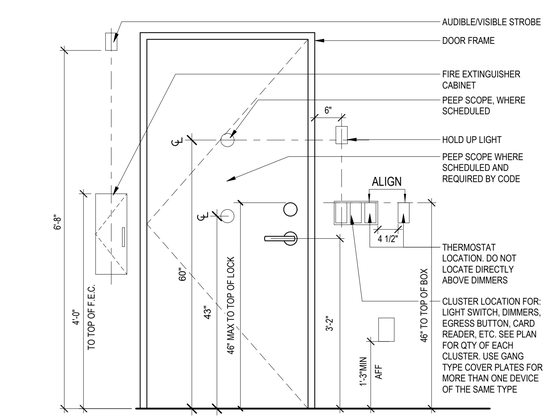


DEVICES AT DOOR IN CLOSED POSITION


DEVICES AT DOOR IN OPEN POSITION

NOTE: ALL DIMENSIONS TO CENTER LINE OF DEVICES U.N.O.; INTERCOM TO BE MOUNTED AT 3'-9" AFF U.N.O.; CENTER ALL DEVICES BELOW SWITCH. ALL OPERABLE PARTS SHALL BE OPERABLE WITH ONE HAND AND SHALL NOT REQUIRE TIGHT GRASPING, PINCHING, OR TWISTING OF THE WRIST WITH A MAX OF 5 LBS. OF FORCE TO OPERATE. A CLEAR SPACE TO BE PROVIDED OF 30" MIN. X 48" MIN.


TYPICAL MOUNTING HEIGHTS | 3/4" = 1'-0" | 6

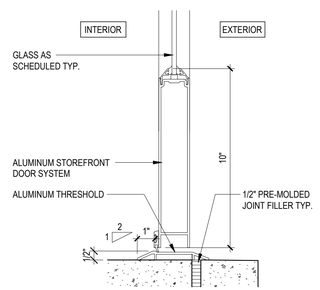


STOREFRONT THRESHOLD | 3" = 1'-0" | 5

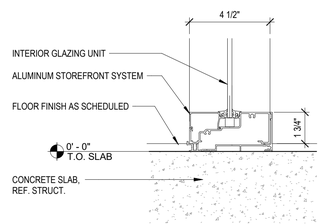


INT. ALUM. SILL | 3" = 1'-0" | 4



INT. ALUM. JAMB/HEAD | 3" = 1'-0" | 3

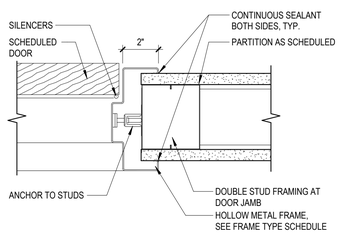

INTERIOR HM JAMB | 3" = 1'-0" | 2

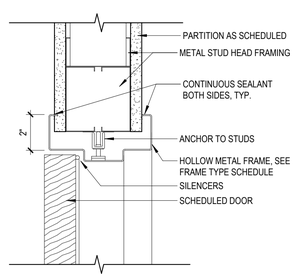

INTERIOR HM HEAD | 3" = 1'-0" | 1

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 3457
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
DOOR SCHEDULE & DETAILS

Sheet Number:
A-600

7/8/2026 2:38:47 PM