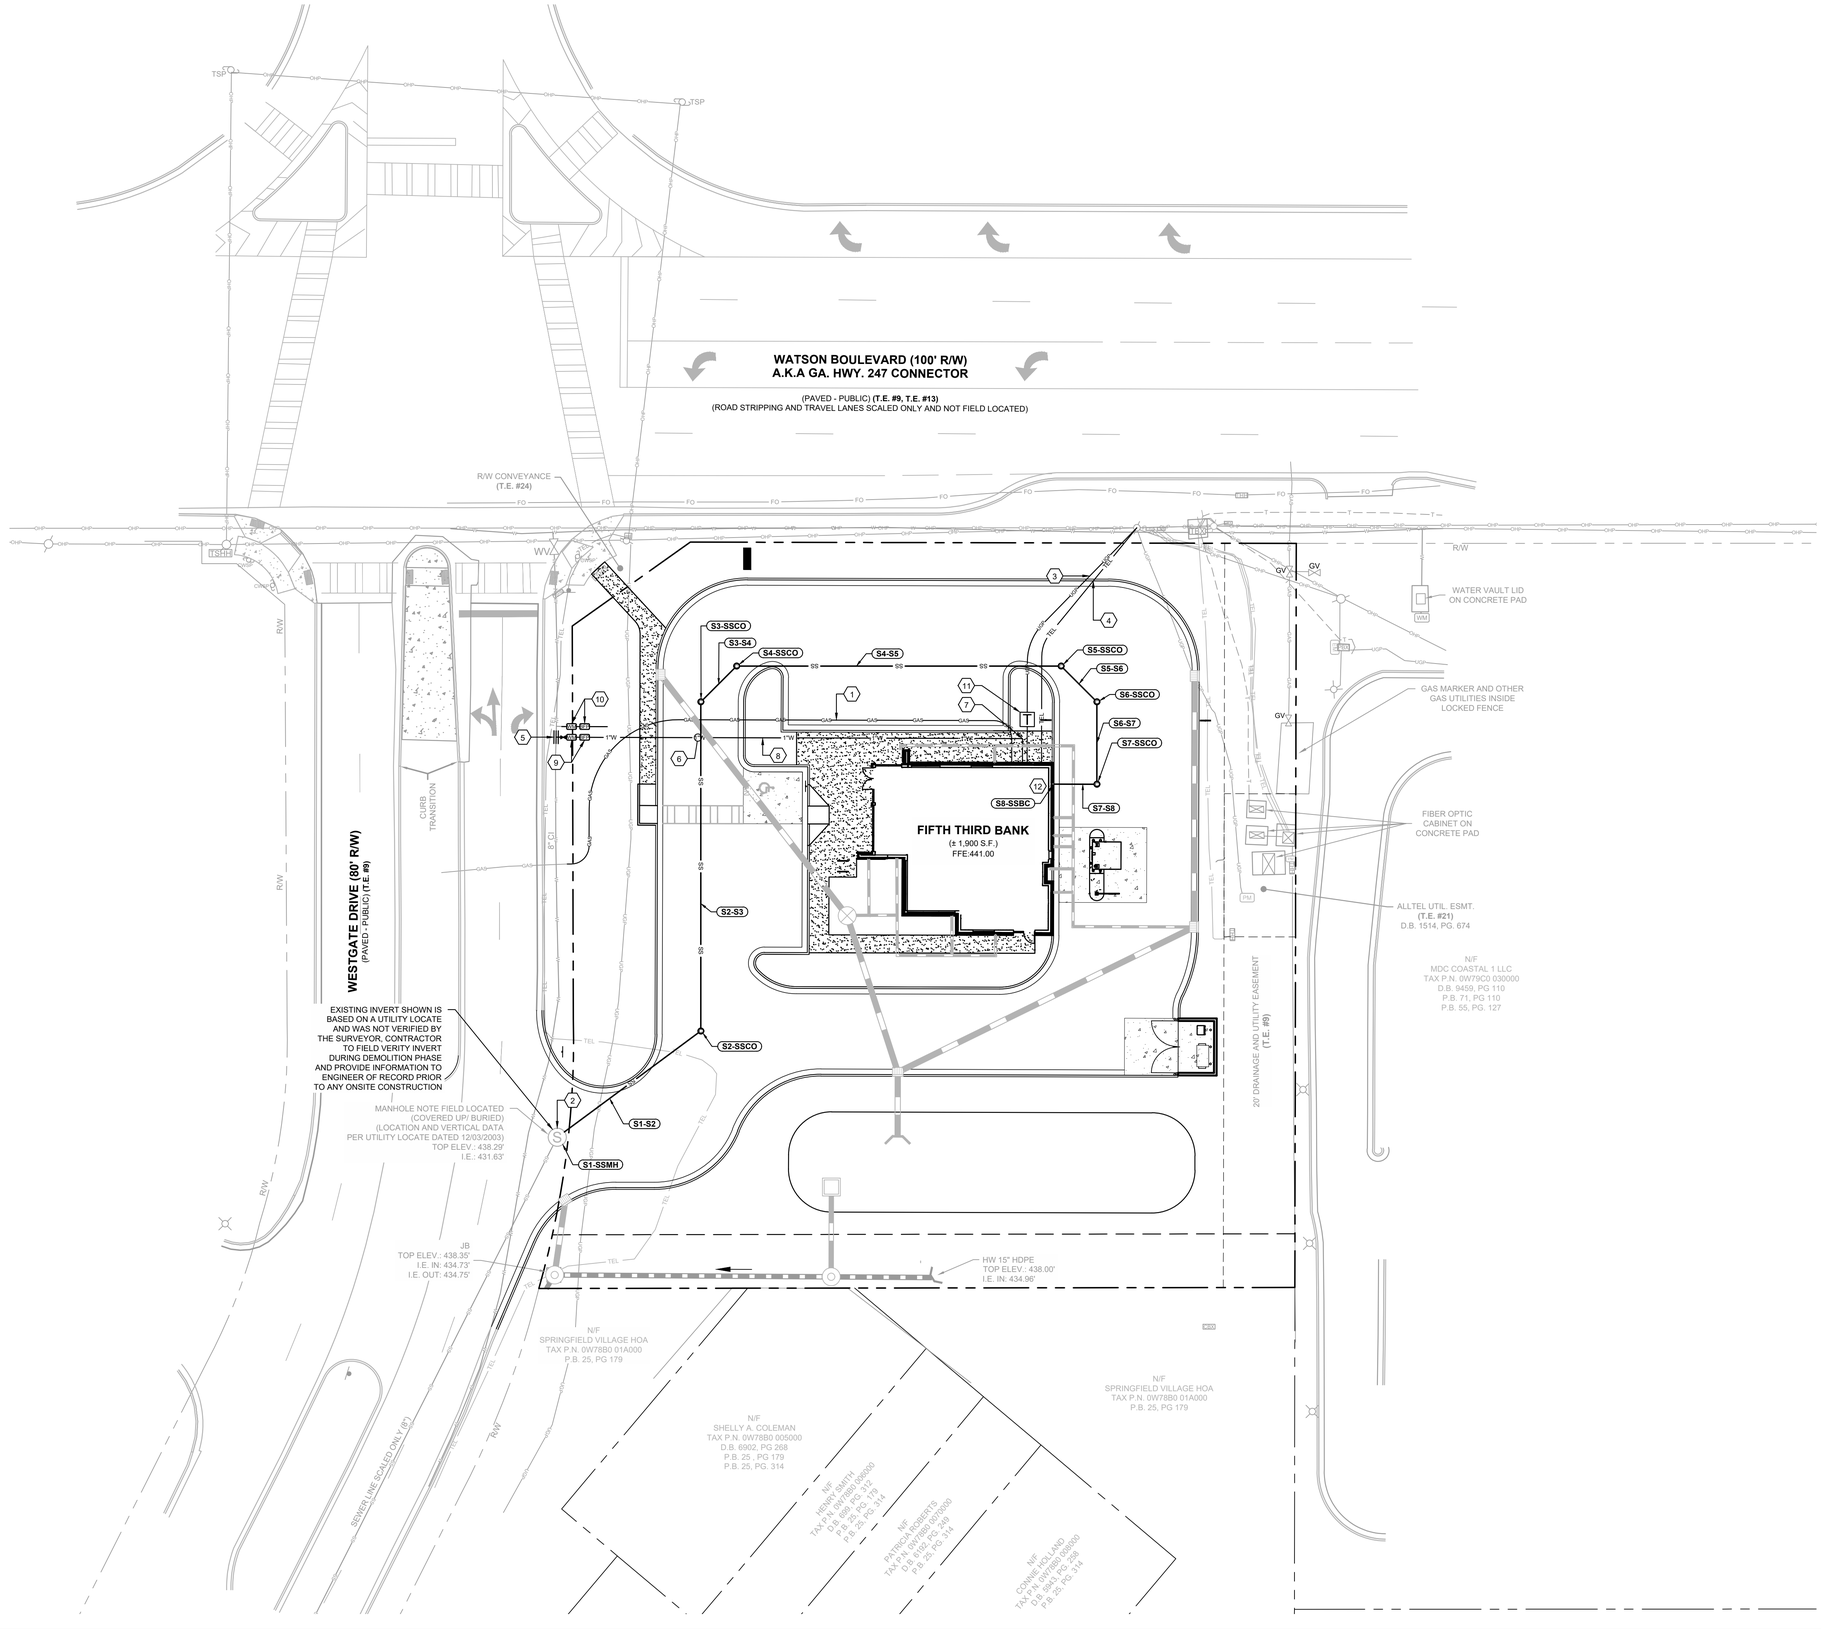


GENERAL UTILITY NOTES

1.) CONTRACTOR TO NOTIFY OWNER/DEVELOPER AND ENGINEER IMMEDIATELY IF FIELD CONDITIONS DIFFER FROM DESIGN ASSUMPTIONS.

2.) LOCATION OF UNDERGROUND UTILITIES SHOWN IS BASED ON A SURVEY BY GASKINS+LECRAW, A PAPE DAWSON COMPANY, DATED 05.08.2026. APPROPRIATE UTILITY COMPANIES SHOULD BE CONTACTED FOR VERIFICATION OF LOCATIONS PRIOR TO ANY CONSTRUCTION ACTIVITY.

3.) MAINTAIN 10' HORIZONTAL SEPARATION BETWEEN WATER AND SEWER LINES.

4.) REFER TO ARCH/MEP PLANS FOR ON SITE UTILITY CONDUITS FOR SITE LIGHTING, ETC. AND UTILITY ENTRY AND EXIT LOCATIONS

5) VERTICAL DEPTH OF ALL DRY AND PRESSURIZED UTILITIES IS UNKNOWN. CONTRACTOR TO NOTIFY OWNER AND ENGINEER IMMEDIATELY IF ANY CONFLICTS ARE FOUND.

KEY NOTES

1	UNDERGROUND GAS SERVICE, CONTRACTOR TO COORDINATE WITH UTILITY PROVIDER FOR EXACT LOCATION AND CONTINUATION
2	LOCATION OF EXISTING MANHOLE FOR PROPOSED SANITARY SEWER CONNECTION, CORE MANHOLE FROM INSIDE AT INVERT ELEVATION SHOWN AND GROUT WATER TIGHT. CONTRACTOR TO CONFIRM EXISTING MANHOLE LOCATION AND INVERT ELEVATION AND SHALL NOTIFY ENGINEER IF FIELD CONDITIONS DIFFER FROM DESIGN CONDITIONS.
3	UNDERGROUND POWER SERVICE, CONTRACTOR TO COORDINATE WITH UTILITY PROVIDER FOR EXACT LOCATION AND CONTINUATION.
4	UNDERGROUND TELEPHONE SERVICE, CONTRACTOR TO COORDINATE WITH UTILITY PROVIDER FOR EXACT LOCATION AND CONTINUATION
5	PROPOSED 8"X8"X1" TAPPING SADDLE AND CORPORATION STOP
6	CONTRACTOR TO BEND WATER LINE AS NECESSARY TO ENSURE VERTICAL CLEARANCE
7	HORIZONTAL PIPE BEND, ALL BENDS TO BE MADE WITH 2 - 45°
8	1" PVC DOMESTIC WATER LINE
9	1" DOMESTIC WATER METER AND RPZ BACKFLOW PREVENTER PER UTILITY PROVIDER STANDARDS AND SPECIFICATIONS
10	CONTRACTOR TO REUSE EXISTING 1" IRRIGATION WATER METER. CONTRACTOR SHALL REPLACE EXISTING METER IF REQUIRED WITH NEW 1" IRRIGATION WATER METER AND RPZ BACKFLOW PREVENTER PER UTILITY PROVIDER STANDARDS AND SPECIFICATIONS
11	PROPOSED TRANSFORMER PAD PER UTILITY PROVIDER STANDARDS AND SPECIFICATIONS
12	REFER TO ARCH PLANS FOR ALL LOCATIONS AND INTERNAL CONNECTIONS

STRUCTURE TYPES

SSCO: CLEANOUT
SSBC: BUILDING CONNECTION
SSMH: MANHOLE

CAUTION

THE UTILITES SHOWN ARE SHOWN FOR THE CONTRACTORS CONVENIENCE ONLY. THERE MAY BE OTHER UTILITIES NOT SHOWN ON THESE PLANS. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR THE LOCATIONS OF UNDERGROUND UTILITIES, AND IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO VERIFY THE LOCATIONS OF ALL UTILITIES SHOWN AS WELL AS THOSE NOT SHOWN WITHIN THE CONSTRUCTION LIMITS. ALL DAMAGE MADE TO EXISTING UTILITIES BY THE CONTRACTOR SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

SANITARY STRUCTURES

NAME:	TYPE:	STATION:	RIM:	INV IN: (PIPE)	INV OUT: (PIPE)
S1-SSMH	MANHOLE (EXISTING)	0+00.00	438.31	431.85 (S1-S2)	
S2-SSCO	CLEANOUT	0+49.92	439.06	432.35 (S2-S3)	432.35 (S1-S2)
S3-SSCO	CLEANOUT	1+41.96	439.39	433.27 (S3-S4)	433.27 (S2-S3)
S4-SSCO	CLEANOUT	1+56.10	439.66	433.41 (S4-S5)	433.41 (S3-S4)
S5-SSCO	CLEANOUT	2+46.80	439.96	434.32 (S5-S6)	434.32 (S4-S5)
S6-SSCO	CLEANOUT	2+60.94	439.86	434.46 (S6-S7)	434.46 (S5-S6)
S7-SSCO	CLEANOUT	2+83.96	440.12	434.69 (S7-S8)	434.69 (S6-S7)
S8-SSBC	BLDG CONNECTION	2+95.96	440.37		434.81 (S7-S8)

SANITARY PIPES

NAME:	SIZE:	LENGTH:	SLOPE:	INV UP:	INV DOWN:	MATERIAL:
S1-S2	6"	49.92	1.00%	432.35 (S2-SSCO)	431.85 (S1-SSMH)	PVC
S2-S3	6"	92.03	1.00%	433.27 (S3-SSCO)	432.35 (S2-SSCO)	PVC
S3-S4	6"	14.14	1.00%	433.41 (S4-SSCO)	433.27 (S3-SSCO)	PVC
S4-S5	6"	90.70	1.00%	434.32 (S5-SSCO)	433.41 (S4-SSCO)	PVC
S5-S6	6"	14.14	1.00%	434.46 (S6-SSCO)	434.32 (S5-SSCO)	PVC
S6-S7	6"	23.03	1.00%	434.69 (S7-SSCO)	434.46 (S6-SSCO)	PVC
S7-S8	6"	12.00	1.00%	434.81 (S8-SSBC)	434.69 (S7-SSCO)	PVC

PREPARED IN THE OFFICE OF:
GASKINS +LECRAW
a PAPE-DAWSON company

© 2026 GASKINS + LECRAW

3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

REV.#	DATE	DRAWN BY:	CHECKED BY:

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W0780-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

GEORGIA REGISTERED No. PE036681 PROFESSIONAL ENGINEER TIMOTHY KYLE SHARPE
7/9/2026

CALL BEFORE YOU DIG
811 Know what's below. Call before you dig.

SCALE & NORTH ARROW:
NORTH ARROW
0' 10' 20' 40'
SCALE: 1" = 20'

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	MAT
REVIEWED BY:	TKS
JOB #:	75670007
DATE:	JULY 9, 2026

UTILITY PLAN

C-5.0

Drawing name: C:\Users\cklentz\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins_GA\CADD\CONSTR\75670007 - 08 - UTILITY.dwg UTILITY PLAN Jul 09, 2026, 10:52am by: cklentz

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company, Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026