


BOLLARD DETAIL

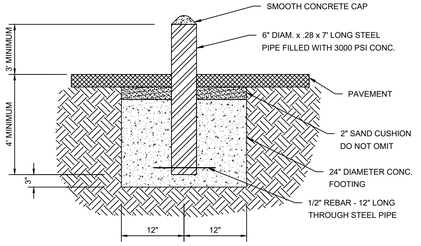


DOWNSPOUT CONNECTION DETAIL

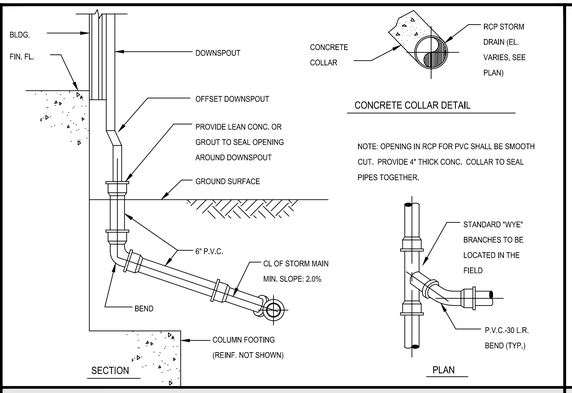


ADA PARKING DETAIL

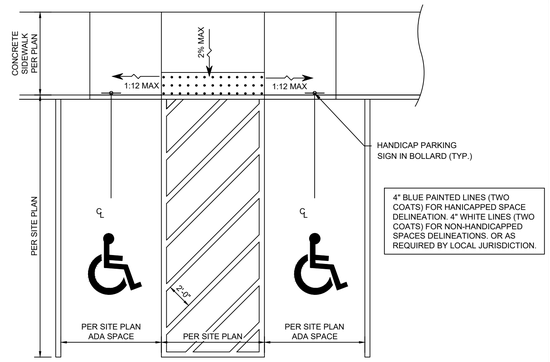


ADA PARKING SYMBOL DETAIL

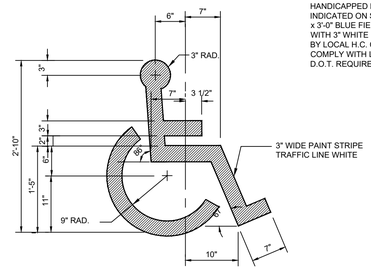


"V" NOTCH / TAPER CURB DETAIL

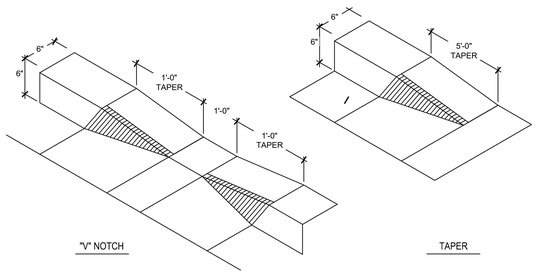


TRAFFIC SIGN MOUNTING DETAIL

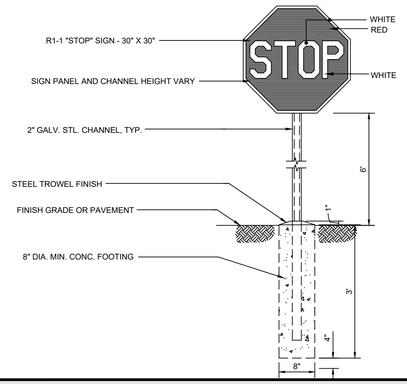


CONCRETE FLUME DETAIL

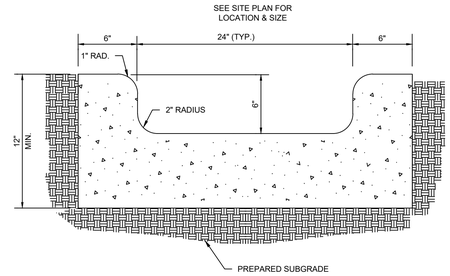

CONCRETE WHEELSTOP DETAIL

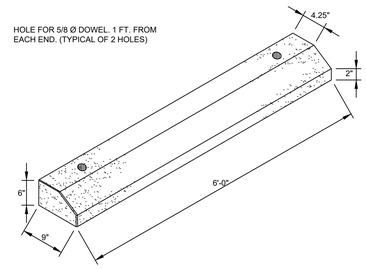


"V" NOTCH / TAPER CURB DETAIL

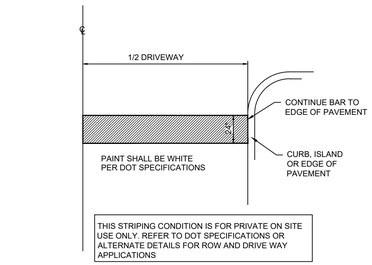


THIS STRIPING CONDITION IS FOR PRIVATE ON SITE USE ONLY. REFER TO DOT SPECIFICATIONS OR ALTERNATE DETAILS FOR ROW AND DRIVE WAY APPLICATIONS

USE THIS DETAIL FOR INTERNAL PARKING AREA CIRCULATION CONTROL. STOP BARS ADJACENT TO THE RIGHT OF WAY OR WITHIN A RIGHT OF WAY SHALL MEET THE LOCAL JURISDICTIONAL CRITERIA.

TRAFFIC SIGN MOUNTING DETAIL

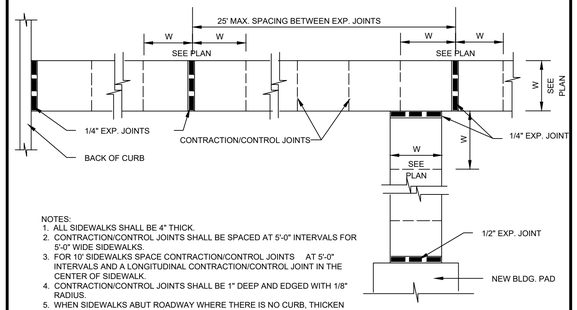


NOTES:
1. ALL SIDEWALKS SHALL BE 4" THICK.
2. CONTRACTION/CONTROL JOINTS SHALL BE SPACED AT 5'-0" INTERVALS FOR 5'-0" WIDE SIDEWALKS.
3. FOR 10' SIDEWALKS SPACE CONTRACTION/CONTROL JOINTS AT 5'-0" INTERVALS AND A LONGITUDINAL CONTRACTION/CONTROL JOINT IN THE CENTER OF SIDEWALK.
4. CONTRACTION/CONTROL JOINTS SHALL BE 1" DEEP AND EDGED WITH 1/8" RADIUS.
5. WHEN SIDEWALKS ABUT ROADWAY WHERE THERE IS NO CURB, THICKEN WALK TO 6" IN 3'-0".
6. 1/2" EXP. MATERIAL REQUIRED WHERE CONCRETE SIDEWALK ABUTS CONCRETE STRUCTURE.
7. A LAYER OF 15# FELT IS REQUIRED BETWEEN WALK AND ADJACENT PARALLELING CONCRETE CURB.

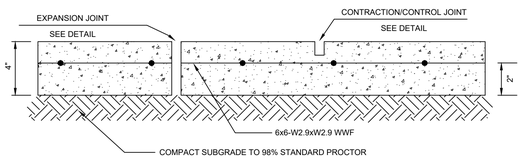


EXPANSION JOINTS REQUIRED AT ALL STRUCTURES, MAX. SPACING TO BE 25'. CONTRACTION/CONTROL JOINTS TO BE SPACED EVERY 5'. 3000 P.S.I. CONCRETE, 2" SLUMP, WITH BROOM FINISH.

CONCRETE FLUME DETAIL

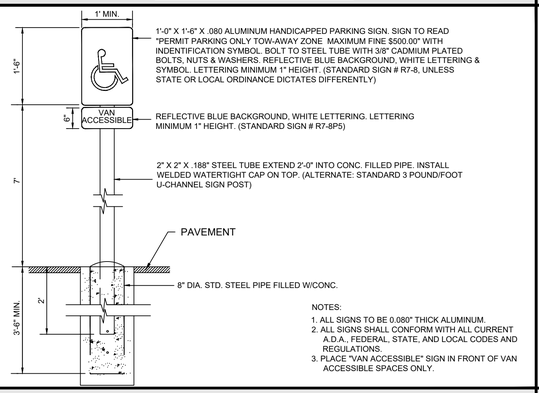


NOTES:
1. ALL SIGNS TO BE 0.080" THICK ALUMINUM.
2. ALL SIGNS SHALL CONFORM WITH ALL CURRENT A.D.A., FEDERAL, STATE, AND LOCAL CODES AND REGULATIONS.
3. PLACE "VAN ACCESSIBLE" SIGN IN FRONT OF VAN ACCESSIBLE SPACES ONLY.

CONCRETE WHEELSTOP DETAIL

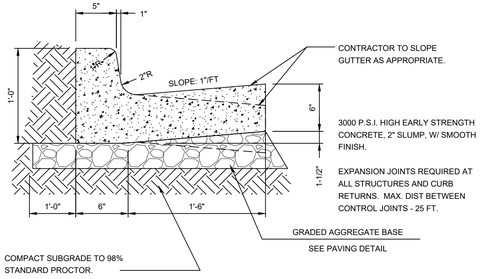

STOP BAR DETAIL

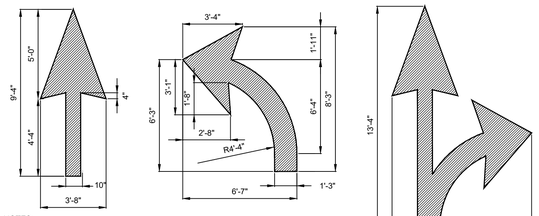

NOTES:

USE DIMENSIONS SHOWN FOR ROADS.

REDUCE DIMENSIONS SHOWN BY 50 % FOR PARKING LOTS AND DRIVES.

PAINT SHALL COMPLY WITH LOCAL OR STATE D.O.T. REQUIREMENTS.

ADA SIGN MOUNTING DETAIL



NOTE: CONTRACTOR TO CONFIRM COMPLIANCE WITH STATE OR LOCAL REQUIREMENTS.

PAVEMENT MARKING DETAIL

SIDEWALK DETAIL

ADA SIGN DETAIL

CURB & GUTTER DETAIL

PREPARED IN THE OFFICE OF:
GASKINS +LECRAW
a PAPE-DAWSON company

© 2026 GASKINS + LECRAW

3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com

PEF008127

REVISIONS:

NO.#	DATE	DRAWN BY:	CHECKED BY:
1			
1			
1			
1			
1			

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W0780-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

GEORGIA REGISTERED No. PE036681 PROFESSIONAL ENGINEER TIMOTHY KYLE SHARPE

7/9/2026

CALL BEFORE YOU DIG

811 Know what's below. Call before you dig.

SCALE & NORTH ARROW:

DETAILS ARE **NOT** DRAWN TO SCALE

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	MAT
REVIEWED BY:	TKS
JOB #:	75670007
DATE:	JULY 9, 2026

CONSTRUCTION DETAILS - 1

C-6.0

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company, Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026

Drawing name: C:\Users\oklentz\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins_GA\CADD\CONSTR\75670007 - 10 - DETAILS.dwg CONSTRUCTION DETAILS - 1 Jul 09, 2026 10:53am by: oklentz