


2 E-130 ELECTRICAL LIGHTING PLAN - BOOTH
1/4" = 1'-0"


LCP SCHEDULE

RELAY NUMBER	PANEL	CIRCUIT NUMBER	DESCRIPTION OF AREA	LOCAL CONTROL
1	RPA	47	CRITICAL LTG CONTACTOR	EXTERIOR OVERRIDE SWITCH
2	RPA	57	NONCRITICAL LTG CONTACTOR	EXTERIOR OVERRIDE SWITCH
3	RPA	44	EXTERIOR SIGNAGE	EXTERIOR OVERRIDE SWITCH
4	RPA	11	EXTERIOR SIGNAGE	EXTERIOR OVERRIDE SWITCH
5	RPA	5	WEATHER VESTIBULE/ENTRY	OVERRIDE SWITCH "a"
6	RPA	8	LIBRARY/TRANSACTION BAR	OVERRIDE SWITCH "b" & ELV DIMMER "b"
7	RPA	8	LIBRARY/TRANSACTION BAR	OVERRIDE SWITCH "i" & ELV DIMMER "i"
8	RPA	9	BANKING LOBBY	OVERRIDE SWITCH "c"
9	RPA	10	VESTIBULE 116 LOCAL	OVERRIDE SWITCH "d"
10	RPA	24	GATHERING AREA	OVERRIDE SWITCH "e"
11	RPA	8	UNDERCOUNTER SERVICE BAR	EXTERIOR OVERRIDE SWITCH "h"
12	RPA	6	EXTERIOR SIGNAGE	EXTERIOR OVERRIDE SWITCH
13	RPA	60	ATM TOPPER LIGHTING	EXTERIOR OVERRIDE SWITCH
14	RPA	3	UPLIGHTS AND PARAPET LIGHTING	EXTERIOR OVERRIDE SWITCH
15	RPA	4	EXTERIOR CANOPY LIGHTING	EXTERIOR OVERRIDE SWITCH

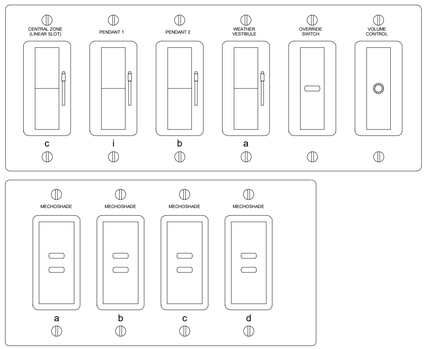

NOTES:
1. PROVIDE LABELED COVER PLATE WITH DESCRIPTION OF LOAD ABOVE EACH SWITCH. PROVIDE SUBMITTAL WITH LEGEND PRIOR TO ORDERING FOR ENGINEER APPROVAL.
2. COORDINATE WITH ARCHITECT FOR EXACT LOCATION AND MOUNTING HEIGHT PRIOR TO ROUGH-IN.
3. SWITCHES SHALL BE GROUPED AS SHOWN WITH SINGLE GANGED COVER PLATE.
4. LINE VOLTAGE ON/OFF TOGGLE AND DECORA ROCKER SWITCHES SHALL BE PROVIDED WITH A PILOT LIGHT TO INDICATE WHEN LIGHTS ARE 'ON'.

3 E-130 SWITCH BANK DETAIL
N.T.S.

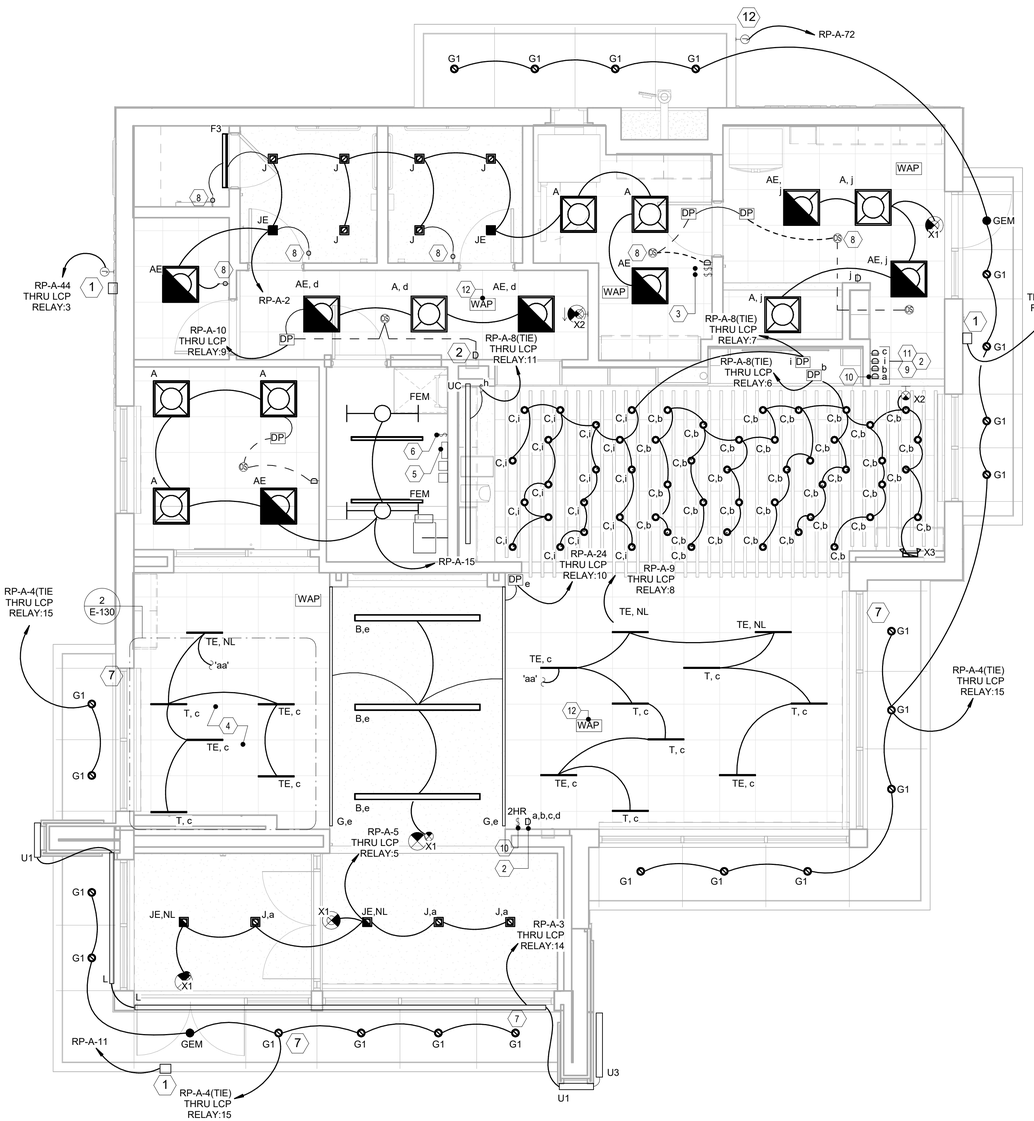

1 E-130 ELECTRICAL POWER & AUXILIARY PLAN
1/4" = 1'-0"

SHEET NOTES:

1. HALF SHADED OR FULLY SHADED LUMINAIRES SHALL BE PROVIDED WITH SELFCONTAINED 90MINUTE BACKUP BATTERY PACKS.
2. EMERGENCY LIGHTING FIXTURES SHALL SWITCH WITH LOCAL NORMAL LIGHTING UNLESS INDICATED AS "EM/NL" OR "NL" (NIGHT LIGHT).
3. EMERGENCY FIXTURES WITH INTEGRAL 90MINUTE BATTERY PACKS SHALL BE PROVIDED WITH AN UNSWITCHED HOT CONDUCTOR SO THAT EMERGENCY BATTERY PACK CAN CHARGE WHEN POWER TO THE LIGHT FIXTURES IS SWITCHED OFF.
4. EXIT AND NIGHT LIGHT FIXTURES SHALL BE CONNECTED TO UNSWITCHE D CIRCUIT AHEAD OF LIGHTING CONTROLLER.
5. THE CIRCUIT NEUTRAL CONDUCTOR SHALL BE ROUTED TO EACH LINE VOLTAGE WALL SWITCH. WHERE THE WIRING DEVICE DOES NOT REQUIRE THE USE OF A NEUTRAL CONDUCTOR, CAP FOR FUTURE USE.
6. LOW VOLTAGE CIRCUITRY IS NOT SHOWN ON THE FLOOR PLANS FOR CLARITY. LOW VOLTAGE CIRCUITRY SHALL BE PROVIDED AND INSTALLED IN ACCORDANCE WITH THE LIGHTING CONTROL VENDOR'S INSTRUCTIONS AND AS REQUIRED BETWEEN ALL LOW VOLTAGE CONTROLS AND FIXTURES.
7. LIGHTING CONTROLS VENDOR SHALL PRODUCE AND SUBMIT JOB SPECIFIC SHOP DRAWINGS SHOWING ALL DEVICE LOCATIONS, SENSOR COVERAGE, AND TERMINALTOTERMINAL WIRING DIAGRAMS SPECIFIC TO THIS PROJECT.

KEYED NOTES:

1. DISCONNECT SWITCH FOR BANK LOGO SIGN. ROUTE 1" C TO PANEL RPA THRU LIGHTING CONTROL PANEL. ELECTRICAL CONTRACTOR SHALL COORDINATE WITH ARCHITECTURAL ELEVATIONS AND SIGNAGE PROVIDER FOR EXACT LOCATION, QUANTITIES AND MOUNTING HEIGHT PRIOR TO ROUGHIN.
2. LOW VOLTAGE ON/OFF/DIMMING OVERRIDE SWITCHES FOR INTERIOR LIGHTING. SWITCH SHALL HAVE THE ABILITY TO TURN THE ZONE ON/OFF DURING PROGRAM "ON" HOURS, HAVE THE ABILITY TO MANUALLY OVERRIDE THE LIGHTS TO BE "ON" FOR TWO HOURS DURING "OFF HOURS",AND HAVE THE ABILITY TO DIM THE LIGHTS.
3. DRIVE THROUGH LANE OPEN/CLOSE GANG SWITCHES. SEE DETAIL 9 ON E-500. COORDINATE PLACEMENT WITH ARCHITECT PRIOR TO ROUGH-IN.
4. FIXTURES "PB" AND "S" SHALL BE MOUNTED AT BOOTH CEILING HEIGHT (SEE BOOTH ENLARGED PLAN). FIXTURES "T" SHALL BE MOUNTED ABOVE BOOTH. SEE ARCHITECTURAL RCP.
5. INTERNET OF TEAM BMS LCP-SA LIGHTING CONTROL PANEL. PANEL HARDWARE IS BY INTERNET OF TEAM AND SHALL BE PREPROGRAMMED PER LCP SCHEDULE. PROVIDE FOUR HOURS FOR INSTALLATION AND COMMISSIONING. PROVIDE AND INSTALL SECONDARY PANEL AS NEED FOR THE NUMBER OF RELAY SPACES.PANEL SHALL HAVE ABILITY TO CONNECT TO BUILDING AUTOMATION SYSTEM.
6. PROVIDE AN OVERRIDE SWITCH FOR TESTING OF EXTERIOR AND SITE LIGHTING. SEE LIGHTING CONTROL SCHEDULE.
7. PROVIDE PHOTOSENSOR TO INTERFACE WITH LCP AND BMS FOR EXTERIOR LIGHTING CONTROL. INSTALL PHOTOSENSOR TO WHERE THE EYE OF THE PHOTOSENSOR FACES DUE NORTH. LOCATE PHOTOSENSOR SOMEWHERE THAT IS EXPOSED TO FULL DAYLIGHT AND IS NOT SHADOWED OR DIRECTLY EXPOSED TO ANY NIGHTTIME ILLUMINATION OR ANY OTHER OBSTRUCTIONS.
8. SET LIGHT CONTROLS FOR "OCCUPANCY SENSOR" MODE, TO TURN LIGHTS ON WHEN OCCUPANCY DETECTED.
9. LOW VOLTAGE ON/OFF OVERRIDE SWITCHES FOR TRANSACTION BAR/ LIBRARYLIGHTING. SWITCH SHALL HAVE THE ABILITY TO TURN THE ZONE ON/O FF DURING PROGRAM "ON" HOURS AND HAVE THE ABILITY TO MANUALLY OVERRIDE THE LIGHTS TO BE "ON" FOR TWO HOURS DURING "OFF HOURS". PROVIDE LINE VOLTAGE ELV DIMMER SEPARATELY AS SHOWN.
10. LOW VOLTAGE 2HOUR MANUAL OVERRIDE SWITCH FOR MULTIZONES. LABEL EACH BUTTON WITH ITS RESPECTIVE ROOM/AREA. SWITCH SHALL HAVE ABILITY MANUALLY OVERRIDE THE LIGHTS TO BE "ON" FOR TWO HOURS DURING "OFF HOURS".
11. SWITCH BANK: REFER TO SWITCH BANK DETAIL THIS SHEET AND ELEVATION #3 ON SHEET E-703
12. PROVIDE WEATHER PROOF JUNCTION BOX FOR OPEN/CLOSE SIGN. COORDINATE FINAL LOCATION WITH ARCHITECT.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041508 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
ELECTRICAL LIGHTING PLAN

Sheet Number:
E-130

6/30/2026 2:32:04 PM