
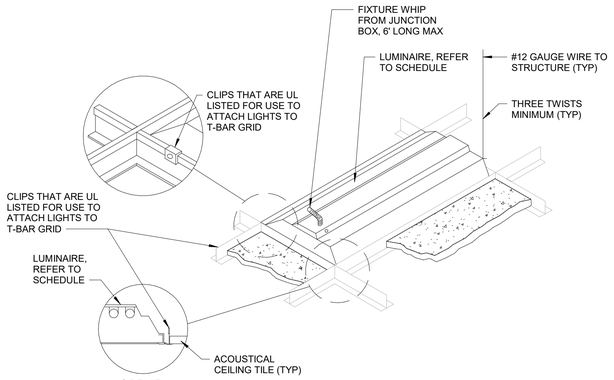


SIDE VIEW:

NOTES:

1. REFER TO ARCHITECTURAL PLANS FOR CEILING GRID SUPPORT REQUIREMENTS. THIS DETAIL SHOWS FIXTURE SUPPORT REQUIREMENTS ONLY.
2. INSTALL IN ACCORDANCE WITH MANUFACTURER'S MOUNTING INSTRUCTIONS AND USING RECOMMENDED MOUNTING HARDWARE.
3. THERMAL INSULATION SHALL NOT BE INSTALLED ABOVE A RECESSED LUMINAIRE OR WITHIN 3" OF THE RECESSED LUMINAIRE'S ENCLOSURES, WIRING COMPARTMENT, BALLAST, TRANSFORMER, LED DRIVER, OR POWER SUPPLY UNLESS THE LUMINAIRE ISIDENTIFIED AS TYPE IC FOR INSULATION CONTACT.


2 E-600 TROFFER MOUNTING - LAY-IN-CEILING
N.T.S.

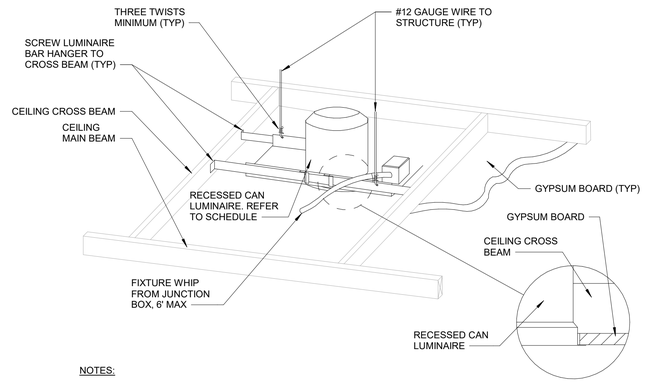

NOTES:

1. INSTALL IN ACCORDANCE WITH MANUFACTURER'S MOUNTING INSTRUCTIONS AND USING RECOMMENDED MOUNTING HARDWARE.
2. THERMAL INSULATION SHALL NOT BE INSTALLED ABOVE A RECESSED LUMINAIRE OR WITHIN 3" OF THE RECESSED LUMINAIRE'S ENCLOSURES, WIRING COMPARTMENT, BALLAST, TRANSFORMER, LED DRIVER, OR POWER SUPPLY UNLESS THE LUMINAIRE IS IDENTIFIED AS TYPE IC FOR INSULATION CONTACT.
3. ALL JUNCTION BOXES SHALL BE ACCESSIBLE.

3 E-600 DOWNLIGHT MOUNTING - GYPBOARD CEILING
N.T.S.

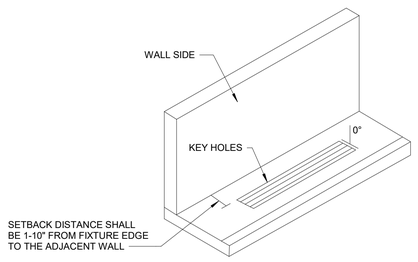

GENERAL NOTES:

1. INGROUND LED, WALK-OVER COMPLIANT, IP68 RATED, ASYMMETRIC WALLWASH WITH ANTI-SLIP LENS.
2. COORDINATE LOCATION WITH ARCHITECT PRIOR TO ROUGH-IN, AIM KEYHOLES AND FROSTED SECTION OF LENS TOWARD THE WALL SIDE.

4 E-600 INGROUND LED INSTALLATION
N.T.S.

LIGHTING FIXTURE SCHEDULE (INTERIOR)

LABEL	DESCRIPTION	LIGHT FIXTURE		MOUNTING	QTY. OF LAMPS	VOLTS	WATTS	NOTES:
		MFG.	MODEL NUMBER					
A	2' X 2' LED RECESSED LUMINAIRE, TRANSMITTANCE DIFFUSER WITH CONCAVE RIBBED REFRACTOR, L90/60,000, STEEL HOUSING, 010V DIMMING DRIVER	GE	LVT-22-B-0-33-MM-835-VQ-LT-WHTE	RECESSED	LED	120	29	
AE	2' X 2' LED RECESSED LUMINAIRE, TRANSMITTANCE DIFFUSER WITH CONCAVE RIBBED REFRACTOR, L90/60,000, STEEL HOUSING, 010V DIMMING DRIVER WITH EMERGENCY BATTERY BACKUP	GE	LVT-22-B-0-33-MM-835-VQ-LT-WHTE-EL	RECESSED	LED	120	29	
B	RECESSED EXTRUDED ALUMINUM, 010V DIMMING STANDARD, LENSED DIFFUSER, STANDARD OUTPUT, HE TECH OPTICS, MUD OVER FLANGE	CORONET	LSR4-8-35-LTG2-UNV-DB-W-NT-SD	RECESSED	LED	120		
C	TACADA PENDANT, BLACK CORD, AGED BRASS HARDWARE SEE REFLECTED CEILING PLANS FOR PENDANT LENGTHS.	MICHAEL OREN	700TDDALVPMC-B-R-LEDWD	PENDANT	LED	120		* VERIFY FINISH WITH ARCHITECT PRIOR TO ORDERING **PROVIDE TEN (10) EXTRA FIXTURES FOR ATTIC STOCK COORDINATE WITH OWNER
F3	WALL MOUNTED 3' LED STRIPLIGHT WITH DIFFUSED LENS AND STEEL HOUSING	LSI	PST-3-3-47L-FAD-UNV-835-GWT	WALL MOUNT (ABOVE DOOR)	LED	120		
FEM	48" SUSPENDED STRIP LIGHT, ACRYLIC DROP LENS, 80 CRI, WHITE FINISH, AIRCRAFT CABLE MOUNTING, WIREGUARD WITH EMERGENCY BATTERY BACKUP	GE	ALV2-0-4T-03-T-C8-1D-S-Q-Q-E-51-A-Q-W	SUSPENDED	LED	120		
G	LINEAR LED COVE WALL WASHER, 5W/ft, MEDIUM OUTPUT, 30 X 80 LENS VIEWING ANGLE, 80CRI	GE	L-LW-SO-B-0-04-CV-8-35-V-Q-TM-WHITE (LENGTH AS SPECIFIED ON PLANS)	COVE	LED	120		
G1	RECESSED LED OPEN ROUND DOWNLIGHT, 5" DIA. APERTURE, WIDE BEAM SPREAD,SEMI-DIFFUSED REFLECTOR FINISH. U.L. LISTED WET LOCATION	CSL	ED5AIC-359050-16-S; ED5-RFWLWT; ED5-TC2	RECESSED	LED	120		
GEM	RECESSED LED OPEN ROUND DOWNLIGHT, 5" DIA. APERTURE, WIDE BEAM SPREAD, SEMI-DIFFUSED REFLECTOR FINISH. U.L. LISTED WET LOCATION WITH EMERGENCY BATTERY BACKUP	CSL	ED5AIC-359050-16-S; ED5-RFWLWT; ED5-TC2; EM-1006	RECESSED	LED	120		
J	6" SQUARE DOWNLIGHT, 010V DIMMING DRIVER, SEMISPECULAR, CLEAR REFLECTOR.	GE	LDX-6S-A-1-15-T-35-VQ / RD-I6S-W-SD-WT	RECESSED	LED	120		
JE	6" SQUARE DOWNLIGHT, 010V DIMMING DRIVER, SEMISPECULAR, CLEAR REFLECTOR WITH EMERGENCY BATTERY BACKUP	GE	LDX-6S-A-1-15-T-35-VQ-EL / RD-I6S-WSD-WT	RECESSED	LED	120		
L	TETRA CONTOUR LS LED LIGHTING SYSTEM, 2W/ft, GREEN LIGHT ENGINE AND GREEN LIGHT GUIDE 180W POWER SUPPLY	GE	GEGNGLE1-A (LENGTH AS SPECIFIED ON PLANS)	RECESSED	LED	120		LOCATE AT PARAPET REVEAL. PROVIDE ALL COMPONENTS AND ACCESSORIES FOR A COMPLETE INSTALLATION
PB	PARAVO PENDANT FIXTURE WHITE FINISH FIBERGLASS SHADE, ALUMINUM EXOSTRUCTURE, FROSTED GLASS PLATE DIFFUSER, MEDIUM BASE LED A21 2700K DIMMABLE LAMP	TECH LIGHTING	700TDPRVP-WW-LED927	PENDANT	LED	120		PROVIDE 4" ROUND BOX
S	STRIP LED, 4' LENGTH, DIFFUSING LENS, MEDIUM WARM CCT, DIMMABLE REMOTE DRIVER. 96W LED DRIVER POWER SUPPLY.	NOVA FLEX	DES-LED-SWH-24-3.0-IP20-35/ CHN-SUR-2217-SL-SOFT-2M/ NF-PS-UNV-80W-24V	RECESSED	LED	120		
T	TBAR LED, 2' LENGTH, DIFFUSING LENS, MEDIUM WARM CCT, DIMMABLE REMOTE DRIVER. 30W POWER SUPPLY	SLG LIGHTING	TG-2-13-W-G1-35K / TG-2-30W	RECESSED	LED	120		COORDINATE AND CONFIRM GRID TYPE WITH ARCHITECTURAL.
TE	TBAR LED, 2' LENGTH, DIFFUSING LENS, MEDIUM WARM CCT, DIMMABLE REMOTE DRIVER. 30W POWER SUPPLY WITH EMERGENCY BATTERY BACKUP	SLG LIGHTING	TG-2-13-W-G1-35K / TG-2-30W-EMH--8	RECESSED	LED	120		COORDINATE AND CONFIRM GRID TYPE WITH ARCHITECTURAL.
U1	INGROUND LED, WALKOVER COMPLIANT, IP68 RATED, ASYMMETRIC WALLWASH WITH ANTISLIP LENS	LUMENFACADE	LOI RO-120-12-35K-WW-NO-ASL	RECESSED	LED	120		COORDINATE LOCATION WITH ARCHITECT PRIOR TO ROUGHIN, AIM KEYHOLES AND FROSTED SECTION OF LENS TOWARD THE WALL SIDE.
U3	INGROUND LED, WALKOVER COMPLIANT, IP68 RATED, ASYMMETRIC WALLWASH WITH ANTISLIP LENS.	LUMENFACADE	LOI RO-120-36-35K-WW-NO-ASL	RECESSED	LED	120		COORDINATE LOCATION WITH ARCHITECT PRIOR TO ROUGHIN, AIM KEYHOLES AND FROSTED SECTION OF LENS TOWARD THE WALL SIDE.
UC	STRIP LED, PERMANENT HOUSING LENGTH WITH LED TAPE THAT SHALL BE FIELD CUT TO THE SIZE OF THE HOUSING, DIFFUSING LENDS, MEDIUM WARM CCT, DIMMABLE REMOTE DRIVER, 80W LED DRIVER POWER SUPPLY.	NOVA FLEX	DES-LED-HO-24V-3.0-IP20-35; NF-CH-1707-SL-SOFT-2M; NF-PS-UNV-80W-24V (LENGTH AS SPECIFIED ON PLANS)	UNDER CABINET	LED	120		* VERIFY FINISH WITH ARCHITECT PRIOR TO ORDERING **PROVIDE TEN (10) EXTRA FIXTURES FOR ATTIC STOCK COORDINATE WITH OWNER
X1	LED EDGE LIT EXIT SIGN, SINGLE FACE, RECESSED IN THE CEILING	EVENLITE	SOVII-EM-R-1M-BA-RC-UC-FP-FT	RECESSED	LED	120		PROVIDE ARROWS AS SHOWN ON FLOOR PLAN
X2	LED EDGE LIT EXIT SIGN, SINGLE FACE, SURFACE WALL MOUNTED	EVENLITE	SOVII-EM-R-1M-BA-SW-UC-FP	RECESSED	LED	120		PROVIDE ARROWS AS SHOWN ON FLOOR PLAN
X3	NORMALLY OFF, EMERGENCY EGRESS CONCEALED WALLPACK	EVENLITE	APLNCUI	RECESSED	LED	120		PROVIDE ALL MOUNTING ACCESSORIES.

LIGHTING FIXTURE SCHEDULE NOTES:

1. MANUFACTURER CATALOG NUMBERS ARE SHOWN FOR GENERAL DESCRIPTIVE PURPOSES AND TO ESTABLISH STANDARD OF QUALITY ONLY. CONTACT CHRIS YOUNG (cyoung@southernlightingsource.com) OR ADAM MAGGIO (amaggio@southernlightingsource.com) (770-242-4000) (53lights@southernlightingsource.com) SOUTHERN LIGHTING SOURCE ON LIGHTING AND LIGHTING CONTROLS. GC/EC SHALL PROVIDE LUMINAIRES COMPLETE WITH ALL OPTIONS AND ACCESSORIES REQUIRED FOR A COMPLETE INSTALLATION. ALL PRODUCTS SHALL BE UL LISTED. POLE MOUNTED LIGHT FIXTURES SHALL MATCH EXISTING DEVELOPMENT AS SPECIFIED. NO EQUALS FOR POLE MOUNTED FIXTURES.
2. REFER TO ELECTRICAL SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS WHICH MAY NOT NECESSARILY BE REFLECTED IN CATALOG NUMBER AND/OR DESCRIPTION IN THIS SCHEDULE
3. PROVIDE FUSES FOR UNGROUNDED CONDUCTORS SUPPLYING LED DRIVERS. PROVIDE FUSE SIZED FOR RATING OF LED DRIVER.
4. VERIFY CONSTRUCTION OF CEILINGS BEING INSTALLED AND PROVIDE THE LUMINAIRES SPECIFIED IN APPROPRIATE CONFIGURATION WITH ALL HARDWARE AND ACCESSORIES REQUIRED FOR A COMPLETE INSTALLATION.
5. PROVIDE LUMINAIRES WITH JOINING PLATES, END CAPS, CANOPIED, MOUNTING HARDWARE, ETC. AS REQUIRED FOR COMPLETE INSTALLATION.
6. EXIT LIGHTS SHALL BE PROVIDED WITH COLOR OF LETTERS REQUIRED BY LOCAL CODE AUTHORITY. FURNISH WITH CHEVRON DIRECTIONAL INDICATORS AS INDICATED AND REQUIRED.
7. PROVIDE DEVICES FOR SECURING LAY-IN TYPE LUMINAIRES TO CEILING GRID TO COMPLY WITH ARTICLE 410 OF THE NATIONAL ELECTRIC CODE.
8. FURNISH LINEAR LUMINAIRES IN CONTINUOUS ROWS OR PATTERNS AS INDICATED ON DRAWINGS. PROVIDE WITH CORNER, ANGLE AND END PIECES AS REQUIRED FOR A COMPLETE INSTALLATION.
9. FURNISH LUMINAIRES IN MECHANICAL SPACES COMPLETE WITH PENDANT STEMS OR CHAIN HANGERS AS REQUIRED TO MOUNT BELOW PIPING, DUCT, CONDUIT, ETC. MAINTAIN UNIFORM MOUNTING HEIGHT FOR ALL LUMINAIRES THROUGHOUT THE MECHANICAL AREA.
10. PENDANT MOUNTED LUMINAIRES WITH AIRCRAFT CABLE SUSPENSION SYSTEMS SHALL BE FURNISHED WITH ADJUSTABLE CABLE GRIP HARDWARE. CABLE SIZE SHALL BE SELECTED MY MANUFACTURER TO PROVIDE ADEQUATE SUPPORT OF LUMINAIRES SPECIFIED.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED No. 041500 PROFESSIONAL ENGINEER RAHN ONEAL WILLIAMS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
LUMINAIRE AND SENSOR SCHEDULE AND DETAILS

Sheet Number:
E-600

6/30/2026 2:32:07 PM