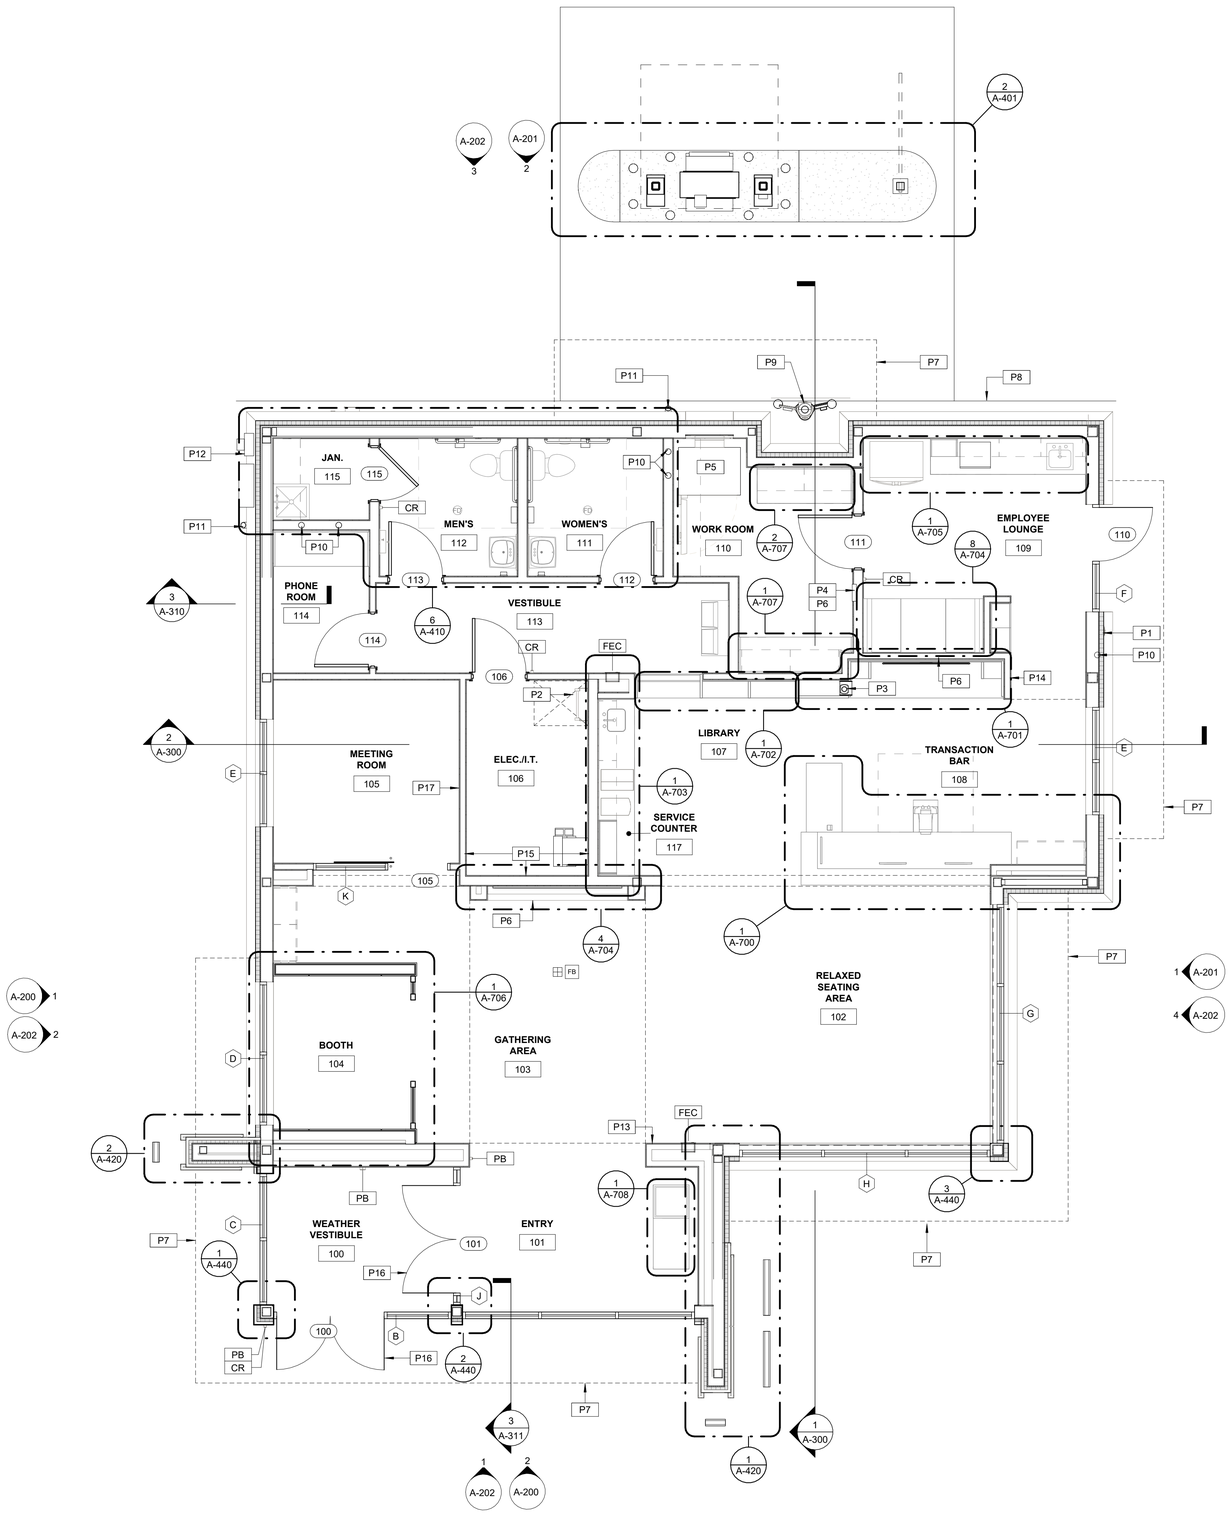


NOTE: PROJECT NORTH IS FOR CONSTRUCTION PURPOSES ONLY. REFER TO CIVIL DRAWING FOR TRUE NORTH AND CORRECT BUILDING ORIENTATION AS IT RELATES TO THE SITE.

A110 FLOOR PLAN | 1/4" = 1'-0" | 1

GENERAL NOTES - FLOOR PLAN

A. ALL PARTITIONS ARE DIMENSIONED FROM FACE OF STUD TO FACE OF STUD, UNLESS OTHERWISE NOTED. ALL DIMENSIONS MARKED "CLEAR" SHALL BE MAINTAINED AND SHALL ALLOW FOR THICKNESS OF ALL FINISHES INCLUDING CARPET, CERAMIC TILE, VCT, ETC.
B. EDGE OF DOOR JAMB SHALL BE MINIMUM 4" FROM INTERSECTING WALL U.N.O. OR AS REQUIRED FOR HARDWARE INSTALLATION
C. SEE SHEET A-620 FOR PARTITION TYPES
D. BANK EQUIPMENT TO BE SUPPLIED AND INSTALLED BY VENDOR
E. CONTRACTOR SHALL PROVIDE BLOCKING FOR ALL WALL-MOUNTED EQUIPMENT AND ACCESSORIES.
F. CONTRACTOR SHALL COORDINATE ALL WOOD BLOCKING, STEEL SUPPORTS, AND ANY OTHER ITEMS WHICH ARE IMBEDDED IN DRYWALL PARTITIONS OR ENCLOSURES, WHICH RELATE TO THEIR WORK OR THE WORK OF ANY SEPARATE CONTRACTORS. ALL WOOD BLOCKING, BRIDGING, BRACING, FRAMING, ETC., SHALL BE FIRE RETARDANT TREATED AS CALLED FOR BY THE GOVERNING BUILDING CODE AND THE CONTRACTOR MUST SUBMIT AFFIDAVITS OF SUCH FIRE TREATMENT TO THE OWNER.
G. ALL INTERIOR FINISHES ARE TO COMPLY WITH THE REQUIREMENTS AS SET FORTH IN THE CURRENT STANDARD EDITIONS OF ALL GOVERNING CODES, REGULATIONS, AND ORDINANCES HAVING JURISDICTION OVER THE SCOPE OF WORK.
H. CONTRACTOR WILL SECURE ALL BUILDING PERMITS & INSPECTIONS NECESSARY FOR THE CONSTRUCTION OF THE PROJECT.
I. DRAWINGS ARE NOT TO BE SCALED
J. LOCATION AND NUMBER OF FIRE EXTINGUISHERS ARE TO BE INSTALLED PER THE DIRECTION OF THE LOCAL AUTHORITIES AND NFPA 13
K. FURNITURE AND MILLWORK TO BE PROVIDED BY OWNER VENDOR. G.C. TO COORDINATE LOCATION OF BLOCKING, PLUMBING, ELECTRICAL AND ALL OTHER REQUIREMENTS
L. REFERENCE ENGINEERING PLANS FOR PLUMBING, ELECTRICAL EQUIPMENT, AND SYSTEMS. CONTRACTOR TO VERIFY AND COORDINATE PLUMBING ROUGH-IN DIMENSIONS WITH PLUMBER. (TO BE PROVIDED BY CONTRACTOR)
M. CONTRACTOR TO SET BANKING EQUIPMENT TEMPLATES. EQUIPMENT VENDOR TO VERIFY CORRECT PLACEMENT AND TO COORDINATE WITH CONTRACTOR FOR PROPER PLACEMENT
N. NO ADJUSTMENT TO THE CONTRACT AMOUNT WILL BE GIVEN FOR THE CONTRACTOR NOT FULLY ACQUAINTING THEMSELVES WITH EQUIPMENT VENDOR REQUIREMENTS.
O. PINK NOISE IS TO BE PROVIDED BY THE CONTRACTOR. COORDINATE PINK NOISE LOCATION WITH MOOD MEDIA VENDOR. REFER TO ELECTRICAL DRAWINGS.
P. REFER TO SHEET A-600 FOR DOOR AND WINDOW SCHEDULE
Q. APPLIANCES PROVIDED AND INSTALLED BY G.C. U.N.O
R. REFER TO SPECS FOR ATTIC STOCK QUANTITIES

FLOOR PLAN SYMBOLS

PARTITION AS SCHEDULED

DOOR AS SCHEDULED

FEC — FIRE EXTINGUISHER CABINET

CR — WALL-MOUNTED CARD READER AS PER DOOR HARDWARE SCHEDULE

PB — ADA DOOR OPERATOR PUSH PADDLE AS PER DOOR HARDWARE SCHEDULE

FB — FLOOR BOX RECEPTACLE WITH BLACK COVER PLATE TRIM FINISH

FD — FLOOR DRAIN

KEY NOTES - FLOOR PLAN

P1	RECESSED KNOX BOX WITH TAMPER SWITCH MOUNTED AT 48" TO THE CENTER OF BOX A.F.F., MODEL # 3200R VERIFY LOCATION WITH LOCAL MUNICIPALITY TO INSURE COMPLIANCE
P2	ROOF ACCESS LADDER. REFER TO SECTION 1/A-312
P3	SINGLE SIDED VAT TUBES BY BANK VENDOR G.C. TO PROVIDE MITERED BLACK ANGLED ALUMINUM FRAME (BOTH SIDES) AROUND VAT TERMINAL. G.C. TO COORDINATE OPENING SIZE AND LOCATION WITH BANK VENDOR
P4	DUAL CONTROL KEY BOX
P5	COMBO NIGHT DEPOSIT BOX / CASH VAULT. FURNISHED BY NATIONAL VENDOR AND INSTALLED BY NATIONAL VENDOR. PREPARATION BY G.C. G.C. TO PROVIDE INSULATION AND WOOD TRIM ON INTERIOR UPON COMPLETION OF ALL ELECTRIC & ALARM WIRING. G.C. TO PROVIDE WOOD BLOCKING BETWEEN BASE OF UNIT AND FLOOR. G.C. TO CONFIRM AND COORDINATE EQUIPMENT CUT SHEETS WITH BANK AND EQUIPMENT VENDOR PRIOR TO INSTALLATION OF WALL OPENING
P6	WALL MOUNTED MONITOR BY BANK VENDOR. COORDINATE W/ OWNER'S VENDOR AND MEP DRAWINGS
P7	LINE OF CANOPY ABOVE
P8	EDGE OF CONCRETE CURB, REF. CIVIL
P9	REMOTE TELLER TERMINAL
P10	ROOF LEADER. REFER TO PLUMBING DRAWINGS
P11	OVERFLOW DOWNSPOUT NOZZLE. REFER TO PLUMBING DRAWINGS
P12	ELECTRICAL METER. REFER TO ELECTRICAL DRAWINGS
P13	DRIVE-THRU INDICATOR LIGHT, INSTALLED AT 8'-0" AFF
P14	LOCATION OF MOOD MEDIA AND MECHOSHADE CONTROLS
P15	INSTALL FIRE RETARDANT PLYWOOD ON ALL WALLS WITHIN IT/ELEC ROOM. PLYWOOD TO BE 8' TALL AND PAINTED TO MATCH ADJACENT WALL. G.C. TO MAINTAIN VISIBILITY OF PLYWOOD LABEL
P16	ACTIVE OPERABLE DOOR LEAF
P17	<varies>

GENERAL NOTES - TERMITE PROTECTION

A. SOIL TREATMENT FOR SUBTERRANEAN TERMITE PREVENTION INSIDE THE FOUNDATION PERIMETER SHALL BE DONE AFTER ALL EXCAVATION, BACKFILLING AND COMPACTION IS COMPLETE.
B. SOIL AREA DISTURBED AFTER INITIAL CHEMICAL SOIL TREATMENT SHALL BE TREATED WITH A CHEMICAL SOIL TREATMENT, INCLUDING SPACES BOXED OR FORMED.
C. SPACE IN CONCRETE FLOORS BOXED OUT OR FORMED FOR THE SUBSEQUENT INSTALLATION OF PLUMBING TRAPS, DRAINS, OR ANY OTHER PURPOSE, SHALL BE CREATED BY USING PLASTIC OR METAL PERMANENTLY PLACED FORMS OF SUFFICIENT DEPTH TO ELIMINATE ANY PLANNED SOIL DISTURBANCE AFTER INITIAL CHEMICAL SOIL TREATMENT.
D. CHEMICALLY TREATED SOIL SHALL BE PROTECTED WITH A MINIMUM 10 MIL VAPOR RETARDER TO PROTECT AGAINST RAINFALL DILUTION. IF RAINFALL OCCURS BEFORE VAPOR RETARDER PLACEMENT, RE-TREATMENT IS REQUIRED. ANY WORK, INCLUDING PLACEMENT OF REINFORCING STEEL, DONE AFTER CHEMICAL TREATMENT UNTIL THE CONCRETE FLOOR IS POURED, SHALL BE DONE IN SUCH A MANNER AS TO AVOID PENETRATING OR DISTURBING TREATED SOIL.
E. CONCRETE OVER-POUR OR MORTAR ACCUMULATED ALONG THE EXTERIOR FOUNDATION PERIMETER SHALL BE REMOVED PRIOR TO EXTERIOR CHEMICAL SOIL TREATMENT, TO ENHANCE VERTICAL PENETRATION OF THE CHEMICALS.
F. CHEMICAL SOIL TREATMENTS SHALL ALSO BE APPLIED UNDER ALL EXTERIOR CONCRETE OF GRADE WITHIN ONE (1) FOOT OF PRIMARY STRUCTURE SIDEWALLS. ALSO A VERTICAL CHEMICAL BARRIER SHALL BE APPLIED PROMPTLY AFTER CONSTRUCTION IS COMPLETED, INCLUDING INITIAL LANDSCAPING AND IRRIGATION/SPRINKLER INSTALLATION. ANY SOIL DISTURBED AFTER THE CHEMICAL VERTICAL BARRIER IS APPLIED SHALL BE PROMPTLY RE-TREATED.
G. THE RULES AND LAWS AS ESTABLISHED BY THE STATE DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES SHALL BE DEEMED AS APPROVED WITH RESPECT TO PRE-CONSTRUCTION SOIL TREATMENT FOR PROTECTION AGAINST SUBTERRANEAN TERMITES.
H. A 'CERTIFICATE OF COMPLIANCE' SHALL BE ISSUED TO THE BUILDING DEPARTMENT BY THE LICENSED PEST CONTROL COMPANY THAT CONTAINS THE FOLLOWING STATEMENT: 'THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES. TREATMENT IS IN ACCORDANCE WITH RULES AND LAWS ESTABLISHED BY THE STATE DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES'.

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 3457
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
FLOOR PLAN

Sheet Number:
A-110

7/8/2026 2:37:42 PM