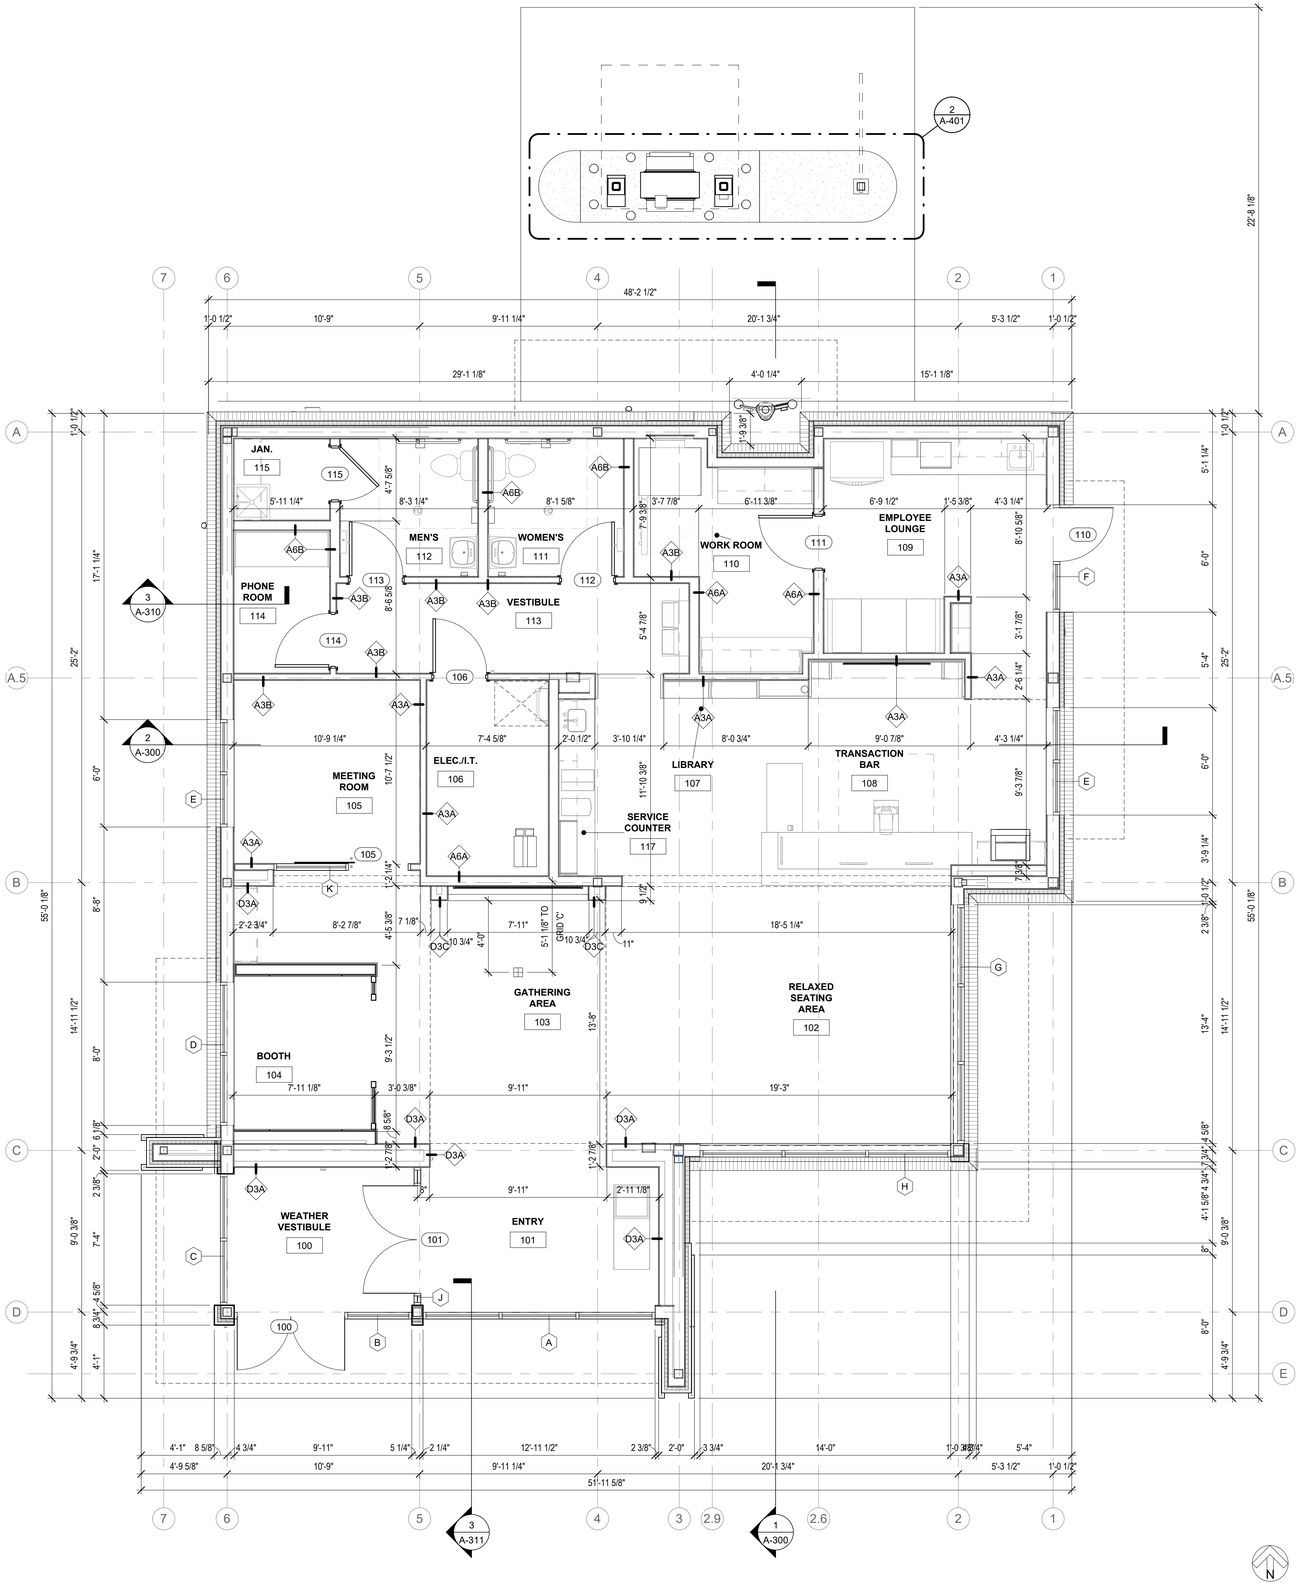


NOTE: PROJECT NORTH IS FOR CONSTRUCTION PURPOSES ONLY. REFER TO CIVIL DRAWING FOR TRUE NORTH AND CORRECT BUILDING ORIENTATION AS IT RELATES TO THE SITE.

DIMENSIONAL FLOOR PLAN | 1/4" = 1'-0" | 1

GENERAL NOTES - FLOOR PLAN

A. ALL PARTITIONS ARE DIMENSIONED FROM FACE OF STUD TO FACE OF STUD, UNLESS OTHERWISE NOTED. ALL DIMENSIONS MARKED "CLEAR" SHALL BE MAINTAINED AND SHALL ALLOW FOR THICKNESS OF ALL FINISHES INCLUDING CARPET, CERAMIC TILE, VCT, ETC.
B. EDGE OF DOOR JAMB SHALL BE MINIMUM 4" FROM INTERSECTING WALL U.N.O. OR AS REQUIRED FOR HARDWARE INSTALLATION
C. SEE SHEET A-620 FOR PARTITION TYPES
D. BANK EQUIPMENT TO BE SUPPLIED AND INSTALLED BY VENDOR
E. CONTRACTOR SHALL PROVIDE BLOCKING FOR ALL WALL-MOUNTED EQUIPMENT AND ACCESSORIES.
F. CONTRACTOR SHALL COORDINATE ALL WOOD BLOCKING, STEEL SUPPORTS, AND ANY OTHER ITEMS WHICH ARE IMBEDDED IN DRYWALL PARTITIONS OR ENCLOSURES, WHICH RELATE TO THEIR WORK OR THE WORK OF ANY SEPARATE CONTRACTORS. ALL WOOD BLOCKING, BRIDGING, BRACING, FRAMING, ETC., SHALL BE FIRE RETARDANT TREATED AS CALLED FOR BY THE GOVERNING BUILDING CODE AND THE CONTRACTOR MUST SUBMIT AFFIDAVITS OF SUCH FIRE TREATMENT TO THE OWNER
G. ALL INTERIOR FINISHES ARE TO COMPLY WITH THE REQUIREMENTS AS SET FORTH IN THE CURRENT STANDARD EDITIONS OF ALL GOVERNING CODES, REGULATIONS, AND ORDINANCES HAVING JURISDICTION OVER THE SCOPE OF WORK.
H. CONTRACTOR WILL SECURE ALL BUILDING PERMITS & INSPECTIONS NECESSARY FOR THE CONSTRUCTION OF THE PROJECT
I. DRAWINGS ARE NOT TO BE SCALED
J. LOCATION AND NUMBER OF FIRE EXTINGUISHERS ARE TO BE INSTALLED PER THE DIRECTION OF THE LOCAL AUTHORITIES AND NFPA 13
K. FURNITURE AND MILLWORK TO BE PROVIDED BY OWNER VENDOR. G.C. TO COORDINATE LOCATION OF BLOCKING, PLUMBING, ELECTRICAL AND ALL OTHER REQUIREMENTS
L. REFERENCE ENGINEERING PLANS FOR PLUMBING, ELECTRICAL EQUIPMENT, AND SYSTEMS. CONTRACTOR TO VERIFY AND COORDINATE PLUMBING ROUGH-IN DIMENSIONS WITH PLUMBER. (TO BE PROVIDED BY CONTRACTOR)
M. CONTRACTOR TO SET BANKING EQUIPMENT TEMPLATES. EQUIPMENT VENDOR TO VERIFY CORRECT PLACEMENT AND TO COORDINATE WITH CONTRACTOR FOR PROPER PLACEMENT
N. NO ADJUSTMENT TO THE CONTRACT AMOUNT WILL BE GIVEN FOR THE CONTRACTOR NOT FULLY ACQUAINTING THEMSELVES WITH EQUIPMENT VENDOR REQUIREMENTS.
O. PINK NOISE IS TO BE PROVIDED BY THE CONTRACTOR. COORDINATE PINK NOISE LOCATION WITH MOOD MEDIA VENDOR. REFER TO ELECTRICAL DRAWINGS.
P. REFER TO SHEET A-600 FOR DOOR AND WINDOW SCHEDULE
Q. APPLIANCES PROVIDED AND INSTALLED BY G.C. U.N.O
R. REFER TO SPECS FOR ATTIC STOCK QUANTITIES

GENERAL NOTES - ACCESSIBILITY

1. ALL CONTROLS FOR USE BY CUSTOMERS MUST BE MOUNTED BETWEEN 15" AND 48" ABOVE FINISHED FLOOR AND MUST HAVE 30" X 48" MINIMUM CLEAR FLOOR SPACE FOR A FORWARD OR PARALLEL APPROACH. CONTROLS MOUNTED OVER AN OBSTRUCTION THAT IS BETWEEN 10" AND 24" DEEP MAY BE NO HIGHER THAN 46" AFF. IF A PARALLEL APPROACH IS PROVIDED; OR WHERE OBSTRUCTIONS ARE BETWEEN 20" AND 25' DEEP WITH A FORWARD APPROACH. CONTROLS MUST NOT REQUIRE TIGHT GRASPING OR TWISTING OF THE WRIST.

2. COMMON EMPLOYEE AREAS SUCH AS BREAK ROOMS, LOCKERS, AND TOILET ROOMS MUST BE ACCESSIBLE AND HAVE ACCESSIBLE FEATURES AND FIXTURES. EMPLOYEE WORK AREAS LESS THAN 1,000 SF AS DEFINED BY PERMANENTLY INSTALLED PARTITIONS, COUNTERS, CASEWORK OR FURNISHINGS ARE NOT REQUIRED TO HAVE AN ACCESSIBLE PATH OF CIRCULATION THROUGHOUT THE SPACE BUT ARE REQUIRED TO BE CONSTRUCTED SO AN INDIVIDUAL CAN APPROACH, ENTER AND EXIT THE SPACE.

3. IN COMMON SPACES WITHIN EMPLOYEE AREAS, AT LEAST ONE OF EACH TYPE OF STORAGE WORK COUNTER, 5% OF LOCKERS AND CONTROLS (EMERGENCY PHONES, CARD READERS ETC.) MUST BE ON AN ACCESSIBLE ROUTE, WITHIN REACH RANGE AND MUST COMPLY WITH STANDARDS FOR CONTROLS AS DEFINED IN THE GOVERNING ACCESSIBILITY STANDARDS OR LOCAL CODES, WHICHEVER IS STRICTER.

4. FIRE ALARM SYSTEM SHALL HAVE PERMANENTLY INSTALLED AUDIBLE AND VISIBLE ALARMS COMPLYING WITH NFPA 72 (1999 OR 2010 EDITION) AND AS REQUIRED BY LOCAL AUTHORITIES. ALARMS MUST BE LOCATED IN PUBLIC AND COMMON USE AREAS. WHERE EMPLOYEES HAVE AUDIBLE ALARMS, THE WIRING SHALL BE DESIGNED SO VISIBLE ALARMS CAN BE INTEGRATED INTO THE SYSTEM, UNLESS GREATER STANDARDS ARE REQUIRED BY LOCAL AUTHORITIES.

5. OPERABLE PORTION OF CARD READER TO BE MOUNTED AT 48" OR BELOW WITH CLEAR FLOOR SPACE FOR FRONT OR PARALLEL APPROACH.

6. ALL SIGNS IDENTIFYING PERMANENT ROOMS OR SPACES ARE REQUIRED TO HAVE VISUAL AND RAISED CHARACTERS AND BRAILLE. SIGNAGE TO BE MOUNTED ON LATCH SIDE OF DOOR WITH THE BOTTOM OF THE BRAILLE NO LOWER THAN 48" AND THE BOTTOM OF THE HIGHEST TACTILE CHARACTER NO HIGHER THAN 60" AFF.

7. IN PUBLIC AREAS PROVIDED WITH WORK SURFACES ARE COUNTERS INTENDED FOR DINING/DRINKING, AT LEAST 5% OF THE TABLES MUST BE ACCESSIBLE WITH COMPLIANT KNEE AND TOE CLEARANCE IN AN ACCESSIBLE ROUTE AND DISTRIBUTED THROUGHOUT THE SPACE. ALL EQUIPMENT, FURNITURE AND MILLWORK INTENDED FOR CUSTOMER USE MUST MEET ALL CLEARANCES AND 2. 6.

8. REACH RANGES AS DEFINED BY GOVERNING ACCESSIBILITY CODE OR LOCAL CODE; WHICHEVER IS STRICTER.

9. PROVIDE ACCESSIBLE FLOOR TRANSITIONS AT ALL LOCATIONS WHERE THERE IS A CHANGE IN FLOORING MATERIAL OR AT DOOR THRESHOLDS. THE CHANGE OF LEVEL BETWEEN MATERIALS MUST BE NO MORE THAN ¾" OR UP TO ½" IF SLOPED NO MORE THAN 1:2.

10. ALL DATA AND POWER RECEPTACLES INTENDED FOR CUSTOMER ACCESS/USE MUST BE INSTALLED WITHIN ACCESSIBLE REACH RANGES-SEE PLAN GENERAL NOTE 1.

11. WALL MOUNTED EQUIPMENT, FIXTURES, LIGHTING, ETC. BETWEEN 27" AND 80" AFF. SHALL NOT PROTRUDE MORE THAN 4" FROM THE WALL PER ACCESSIBILITY REQUIREMENTS.

12. ALL EQUIPMENT (INCLUDING COFFEE MACHINES, ATM MACHINES, ETC.), FURNITURE, AND MILLWORK INTENDED FOR CUSTOMER USE MUST BE ON AN ACCESSIBLE ROUTE AND MUST MEET ACCESSIBILITY STANDARDS FOR CLEAR FLOOR SPACE, REACH RANGE, OPERATING PARTS, AND KNEE AND TOE SPACE AS DEFINED BY ACCESSIBILITY REQUIREMENTS OR APPLICABLE LOCAL CODES, WHICHEVER IS STRICTER.

13. ALL EQUIPMENT INTENDED FOR CUSTOMER USE MUST BE PLACED SO THAT CONTROLS REQUIRED FAR USE ARE WITHIN ACCESSIBLE REACH RANGE. OWNER MUST VERIFY THAT ALL EQUIPMENT MEETS THESE REQUIREMENTS PRIOR TO INSTALLATION.

FLOOR PLAN SYMBOLS

- PARTITION AS SCHEDULED
- DOOR AS SCHEDULED
- FEC — FIRE EXTINGUISHER CABINET
- CR — WALL-MOUNTED CARD READER AS PER DOOR HARDWARE SCHEDULE
- PB — ADA DOOR OPERATOR PUSH PADDLE AS PER DOOR HARDWARE SCHEDULE
- FB — FLOOR BOX RECEPTACLE WITH BLACK COVER PLATE TRIM FINISH
- FD — FLOOR DRAIN

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 36511
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
DIMENSIONAL FLOOR PLAN

Sheet Number:
A-120

7/8/2026 2:37:44 PM