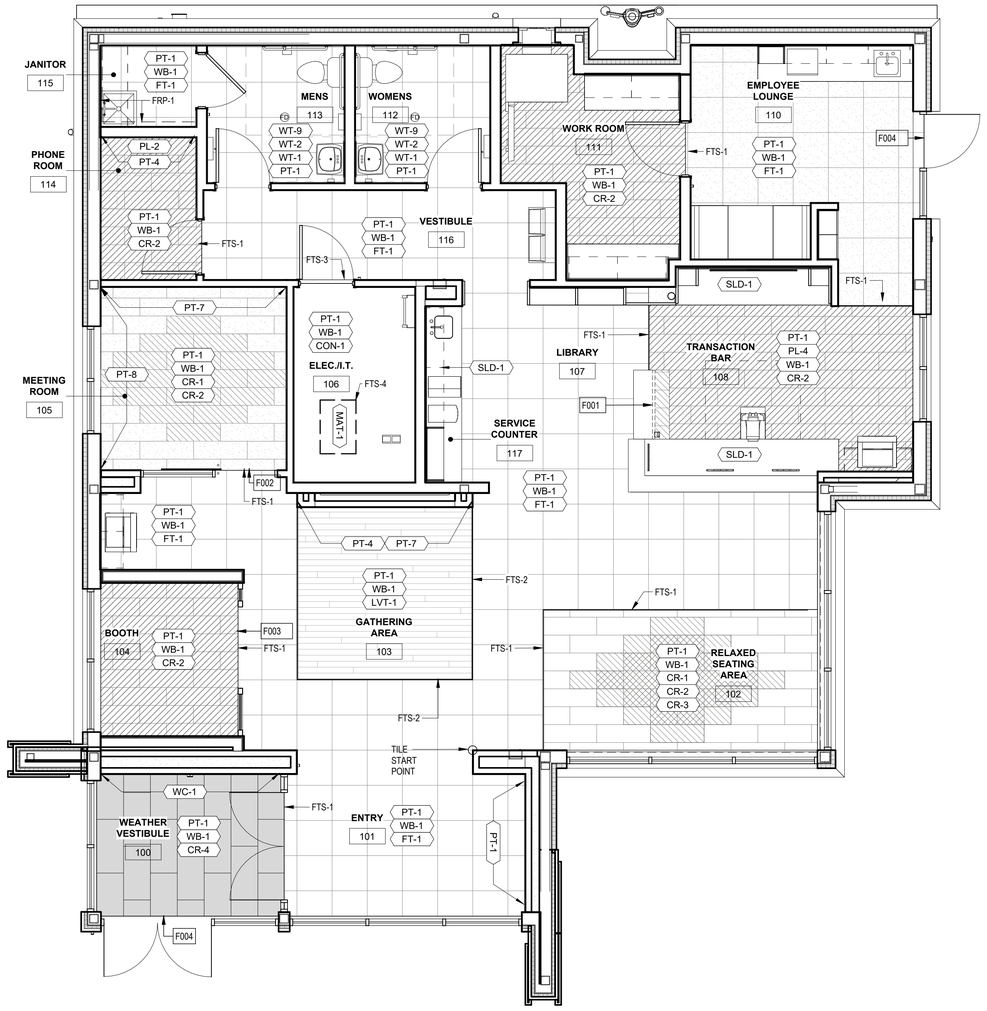


FINISH PLAN | 1/4" = 1'-0" | 6

GENERAL NOTES - FINISH PLAN

A. CONTRACTOR TO PHYSICALLY RECHECK ALL MEASUREMENTS PROVIDED IN DRAWINGS.

B. FIELD VERIFICATION IS REQUIRED FOR QUANTITIES OF ALL MATERIALS PRIOR TO ORDERING AND INSTALLING. (DO NOT SCALE DRAWINGS).

C. WHEN A CHANGE IN FLOOR FINISH OCCURS AT DOORWAY, THE SEAM IS TO BE CENTERED UNDER THE DOOR UNLESS OTHERWISE INDICATED.

D. THRESHOLDS/TRANSITION STRIPS MUST BE PROVIDED BETWEEN DIFFERING FLOORING MATERIALS. SAMPLES MUST BE PROVIDED TO DESIGNER FOR APPROVAL PRIOR TO ORDERING AND INSTALLING.

E. CONTRACTOR TO ENSURE ALL EXISTING WALLS AND FLOORS ARE PROPERLY PREPARED FOR INSTALLATION OF SPECIFIED MATERIALS. PATCH AND REPAIR AS NECESSARY, READY TO RECEIVE NEW FINISH (CARPET, PAINT LAMINATE, RESILIENT FLOORING, ETC.)

F. ALL FLOORING TO HAVE MANUFACTURER'S RECOMMENDED FINISH APPLIED AFTER INSTALLATION AND PROPER CARE AND MAINTENANCE INSTRUCTIONS TO BE ISSUED TO THE CLIENT.

G. PAINTING: ALL SURFACES TO RECEIVE ONE COAT PRIMER, TWO COATS PAINT. PROVIDE SAMPLES TO DESIGNER FOR APPROVAL FOR COLOR VERIFICATION PRIOR TO PROCEEDING WITH WORK. ALL PAINT TO BE BENJAMIN MOORE OR EQUAL: ALL DOORS AND FRAMES, TRIM TO BE LATEX SEMI-GLOSS, ALL CEILINGS TO BE FLAT, ALL WALLS TO BE EGGSHELL.

H. ENSURE SURFACES TO RECEIVE FINISHES ARE CLEAN, TRUE AND FREE OF IRREGULARITIES. DO NOT PROCEED WITH WORK UNTIL SATISFACTORY CONDITIONS HAVE BEEN CONFIRMED.

I. CONTRACTOR TO USE THIS PLAN IN CONJUNCTION WITH ALL OTHER PLANS AND ELEVATIONS TO DETERMINE LOCATIONS OF DIFFERENT MATERIALS AND FINISHES. ALL FINISHES TO MEET LOCAL BUILDING CODE REQUIREMENTS.

J. PROVIDE 1 PRIMER COAT AND 2 FINISH COATS MINIMUM.

K. THERE ARE TO BE NO SUBSTITUTIONS OF ANY SPECIFIED MATERIALS/FINISHES WITHOUT THE WRITTEN APPROVAL OF BDG ARCHITECTS, LLP. ANY UNAUTHORIZED CHANGES WILL BE REFINISHED AS SPECIFIED AT CONTRACTOR'S EXPENSE.

L. ALL MATERIALS INDICATED ON THIS CHART WERE AVAILABLE AT TIME OF SPECIFYING, BDG ARCHITECTS, LLP DOES NOT GUARANTEE SUPPLY IF NOT ORDERED IMMEDIATELY UPON AWARD OF CONTRACT BY THE GENERAL CONTRACTOR AND/OR SUBCONTRACTORS. DELAYS RESULTING FROM FAILURE TO DO SO WILL BE THE RESPONSIBILITY AND AT THE EXPENSE OF THE SAID TRADE. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THAT ALL INSTALLED/APPLIED MATERIALS CORRESPOND WITH THE DESIGNER'S SAMPLES AND ARE CONSISTENT IN SHAPE AND COLOR AS APPROVED. CONSULT DESIGNER FOR CLARIFICATION.

M. ALL FABRICS AND MATERIALS MUST HAVE APPROPRIATE FLAME SPREAD RATINGS AS PER OBC REQUIREMENTS. GENERAL CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL CERTIFICATES OF COMPLIANCE AND SUBMITTING THEM TO LOCAL BUILDING AUTHORITIES AND COPY TO CLIENT.

N. PROVIDE LEVEL 5 FINISH WHERE FILM IS APPLIED TO WALL. COORDINATE WITH VENDOR ON CURING TIME PRIOR TO APPLICATION OF FILM.

O. CONTRACTOR IS RESPONSIBLE TO OBTAIN MANUFACTURER'S WRITTEN SPECIFICATIONS AND/OR DESIGNER'S SPECIAL INSTRUCTIONS PRIOR TO INSTALLATION. APPLICATIONS OF MATERIALS AND TO INSTALL/APPLY THEM ACCORDINGLY IS THE CONTRACTOR'S RESPONSIBILITY. ONLY MATERIALS APPROVED IN WRITING BY THE DESIGNER ARE ALLOWED ON SITE


P. ANY SUBSTITUTION OF MATERIALS TO ACCELERATE THE WORK DURING CONSTRUCTION REQUIRES PRIOR WRITTEN APPROVAL OF BOTH THE OWNER AND THE DESIGNER


Q. BDG ARCHITECTS, LLP CANNOT BE HELD RESPONSIBLE FOR THE MANNER OF SUPPLY AND INSTALLATION/APPLICATION OF MATERIALS IF OTHER THAN SPECIFIED BY SAME AND/OR MANUFACTURER

KEY NOTES - FINISH PLAN


F001	FLOOR TRANSITION BETWEEN CARPET AND TILE. TRANSITION TO ALIGN TO VERTICAL PANEL OF ADA LOCATION OF TRANSACTION BAR.
F002	FLOOR TRANSITION AT MEETING ROOM CARPET TO FLOOR TILE. REFER TO THRESHOLD DETAIL @ DIRTT DOOR
F003	FLOOR TRANSITION BETWEEN BOOTH CARPET AND FIELD TILE. FLOORING TRANSITION TO ALIGN TO INTERIOR FACE OF MILLWORK PANEL IN THE BOOTH.
F004	GC TO PROVIDE FLOORING TRANSITIONS TO CONFORM TO CHANGES IN LEVEL BETWEEN 1/4 INCH AND 1/2 INCH MUST BE BEVELED AT 1:2 OR LESS. 1/4 INCH IS THE MAXIMUM VERTICAL RISE.

LEGEND - FINISH PLAN

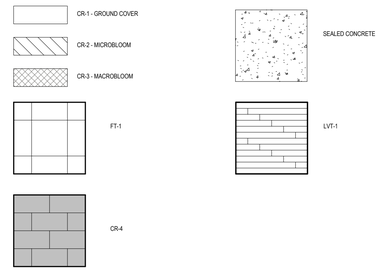

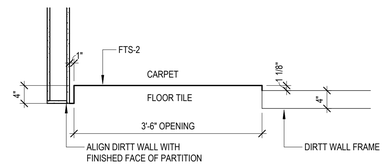


THRESHOLD DETAIL @ DIRTT DOOR | 3/4" = 1'-0" | 5

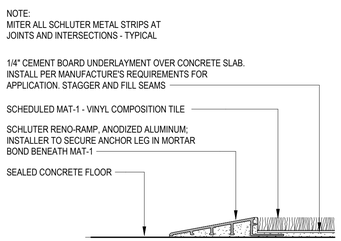


FTS 4 - SEALED CONCRETE TO CARPET

FLOOR TRANSITION: FTS-4 | 6" = 1'-0" | 4

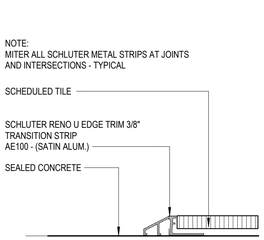


FTS 3 - CONCRETE TO TILE TRANSITION

FLOOR TRANSITION: FTS-3 | 6" = 1'-0" | 3

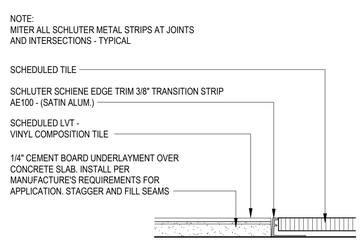

FTS 2 - VINYL TILE PLANK TO TILE

FLOOR TRANSITION - FTS-2 | 6" = 1'-0" | 2

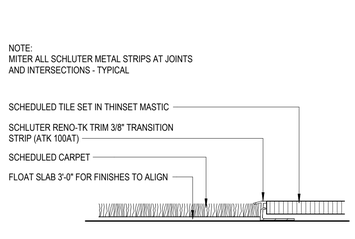

FTS 1 - CARPET TO TILE

FLOOR TRANSITION: FTS-1 | 6" = 1'-0" | 1

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 3457
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
FINISH PLAN

Sheet Number:
A-150

7/8/2026 2:37:53 PM