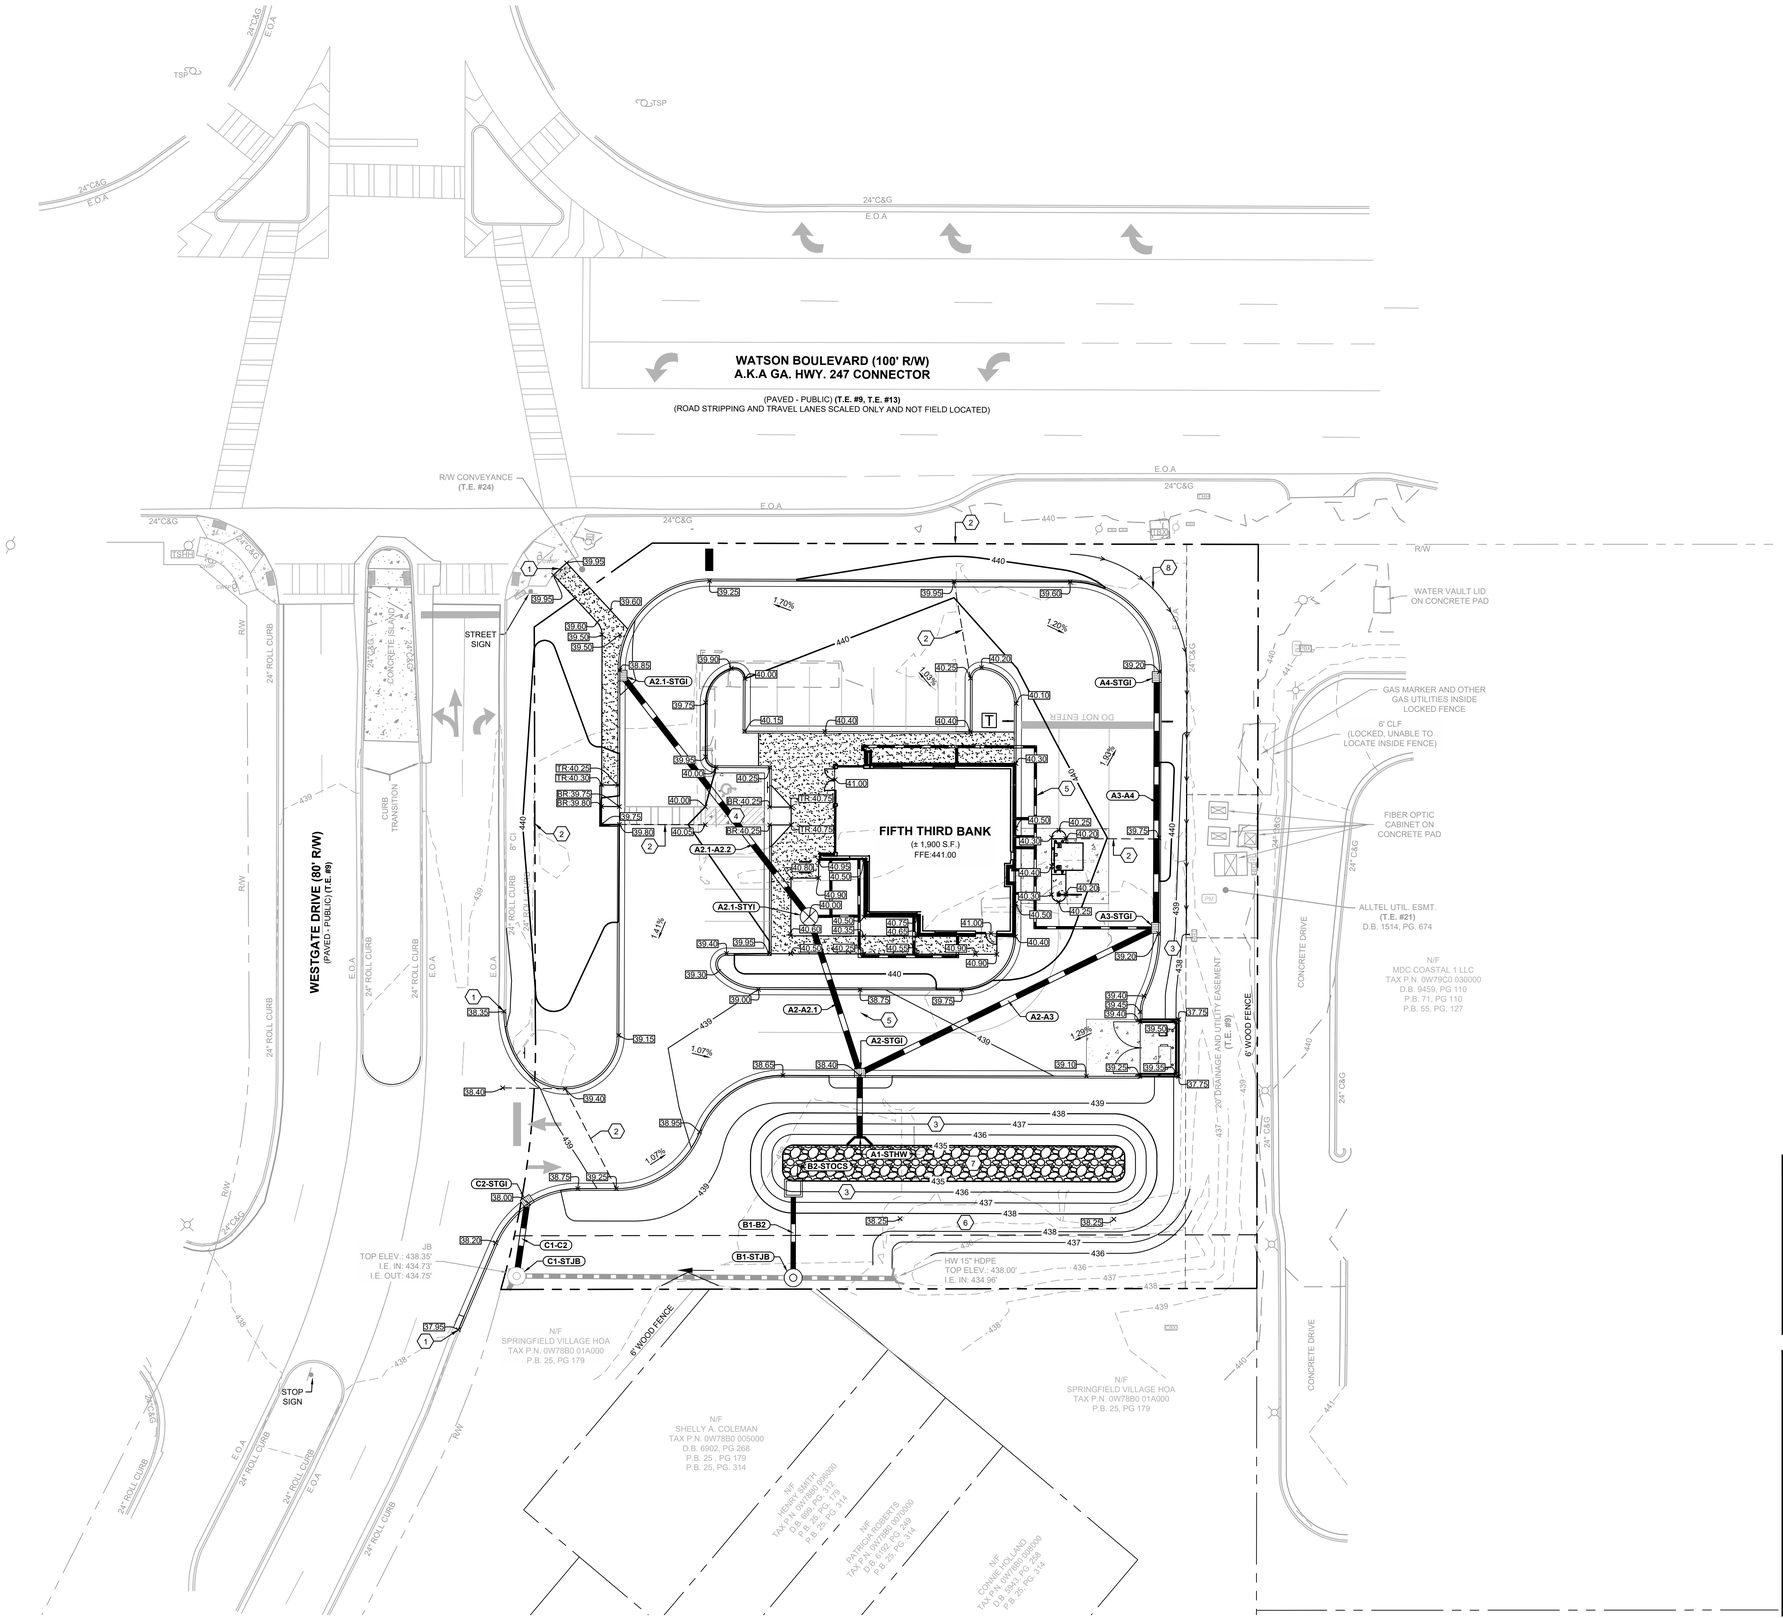


GENERAL GRADING NOTES

1) ALL CRITICAL SPOT GRADES ALONG CURB ARE BOTTOM OF CURB ELEVATIONS UNLESS OTHERWISE SPECIFIED.

2) NO SLOPES ARE TO BE STEEPER THAN 2:1.

3) ALL LAND DISTURBANCE TO BE STABILIZED WITH VEGETATION UPON COMPLETION OF DEMOLITION.

4) BOUNDARY & TOPOGRAPHIC INFORMATION FROM SURVEY BY GASKINS+LECRAW, A PAPE DAWSON COMPANY, DATED 05.08.2026.

5) FLOOD PLAIN IS NOT PRESENT ON THIS SITE AS SHOWN ON THE FEMA FIRM MAP NUMBER 13153C0085E, DATED 09.28.2007.

6) EROSION AND SEDIMENT CONTROL MEASURES ARE TO BE ACCOMPLISHED PRIOR TO ANY OTHER CONSTRUCTION ON THE SITE AND MAINTAINED UNTIL PERMANENT GROUND COVER IS ESTABLISHED.

7) OWNER IS RESPONSIBLE FOR MAINTENANCE OF ALL STORM SEWER ON PRIVATE PROPERTY.

8) THE OWNER IS RESPONSIBLE FOR OBTAINING ANY NECESSARY AGREEMENTS FROM ADJACENT PROPERTY OWNERS IN ORDER TO PERFORM THE REQUIRED OFFSITE WORK, INCLUDING, STORM DRAINAGE, CURB AND GUTTER AND PAVEMENT TIE-INS AND GRADING.

9) VERTICAL DEPTH OF ALL DRY AND PRESSURIZED UTILITIES IS UNKNOWN. CONTRACTOR TO NOTIFY OWNER AND ENGINEER IMMEDIATELY IF ANY CONFLICTS ARE FOUND.

10) SIDEWALKS ADJACENT TO BUILDING AND ALONG ADA ROUTES TO HAVE MAXIMUM CROSS SLOPE OF 2%.

KEY NOTES

1	CONTRACTOR TO TIE INTO AND MATCH EXISTING GRADE
2	RIDGE LINE
3	3:1 SLOPE
4	ADA PARKING AREA, MAXIMUM SLOPE OF 2% IN ANY DIRECTION
5	8" HDPE HEADER PIPE FOR ROOF DRAIN CONNECTION, MINIMUM SLOPE OF 1%
6	5' WIDE DAM, TOP OF DAM ELEVATION: 438.25
7	INFILTRATION BASIN. REFER TO SHEET C-4.2 FOR DETAIL
7	CONTRACTOR TO FINE GRADE 2' WIDE DRAINAGE SWALE @ 1% MIN. SLOPE


SPOT ELEVATION LEGEND

BR: BOTTOM OF RAMP
BW: BOTTOM OF WALL
LP: LOW POINT
TR: TOP OF RAMP
TW: TOP OF WALL
HP: HIGH POINT
*ALL CRITICAL SPOT GRADES ALONG CURB ARE BOTTOM OF CURB ELEVATIONS UNLESS OTHERWISE SPECIFIED.

STRUCTURE TYPES

STSWCB:	GDOT STD 1033D	STDWCB:	GDOT STD 1034D
STSWCB:	GDOT STD 1019A TYPE A	STYI:	NYOPLAST INLET W/DOME
STGI:	GDOT STD 1019A TYPE E	STFE:	GDOT STD 1120
STHW:	GDOT STD 1001B HEADWALL	STOCS:	SEE DETAILS SHEET C-6.2

DEFINITION OF STRUCTURE SPOT ELEVATIONS

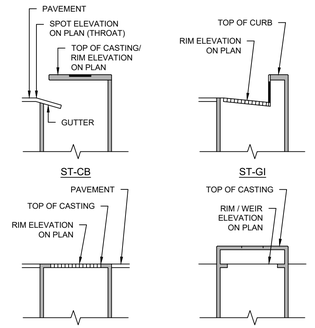

STORM PIPES

NAME:	SIZE:	LENGTH:	SLOPE:	INV UP:	INV DOWN:	MATERIAL:
A1-A2	18"	17.69	0.50%	435.09 (A2-STGI)	435.00 (A1-STHW)	HDPE
A2-A2.1	18"	45.97	0.50%	435.32 (A2.1-STYI)	435.09 (A2-STGI)	HDPE
A2-A3	18"	92.25	0.50%	435.55 (A3-STGI)	435.09 (A2-STGI)	HDPE
A2.1-A2.2	18"	85.26	0.50%	435.74 (A2.2-STGI)	435.32 (A2.1-STYI)	HDPE
A3-A4	18"	70.17	0.50%	435.90 (A4-STGI)	435.55 (A3-STGI)	HDPE
B1-B2	15"	25.11	0.50%	435.00 (B2-STOCS)	434.87 (B1-STJB)	HDPE
C1-C2	18"	21.08	0.50%	434.86 (C2-STGI)	434.75 (C1-STJB)	HDPE

STORM STRUCTURES

NAME:	TYPE:	STATION:	RIM:	INV IN: (PIPE)	INV OUT: (PIPE)
A1-STHW	HEADWALL	0+00.00	435.82	435.00 (A1-A2)	
A2-STGI	HOODED GRATE INLET	0+17.69	438.40	435.09 (A2-A2.1) 435.09 (A2-A3)	435.09 (A1-A2)
A2.1-STYI	YARD INLET	0+45.97	440.00	435.32 (A2.1-A2.2)	435.32 (A2-A2.1)
A2.2-STGI	HOODED GRATE INLET	1+31.22	438.85		435.74 (A2.1-A2.2)
A3-STGI	HOODED GRATE INLET	1+09.95	439.20	435.55 (A3-A4)	435.55 (A2-A3)
A4-STGI	HOODED GRATE INLET	1+80.11	439.20		435.90 (A3-A4)
B1-STJB	JUNCTION BOX	0+00.00	438.25	434.87 (B1-B2)	
B2-STOCS	OUTLET CONTROL STRUCTURE	0+25.11	435.67		435.00 (B1-B2)
C1-STJB	JUNCTION BOX (EXISTING)	0+00.00	438.40	434.75 (C1-C2)	
C2-STGI	HOODED GRATE INLET	0+21.08	438.01		434.86 (C1-C2)

PREPARED IN THE OFFICE OF:
GASKINS +LECRAW
a PAPE-DAWSON company
© 2026 GASKINS + LECRAW
3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

REV.#	DATE	DRAWN BY:	CHECKED BY:

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W0780-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

GEORGIA REGISTERED No. PE036681 PROFESSIONAL ENGINEER TIMOTHY KYLE SHARPE
7/9/2026

CALL BEFORE YOU DIG
811 Know what's below. Call before you dig.

SCALE & NORTH ARROW:
NORTH ARROW
0' 10' 20' 40'
SCALE: 1" = 20'

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	MAT
REVIEWED BY:	TKS
JOB #:	75670007
DATE:	JULY 9, 2026

GRADING PLAN

C-4.0

Drawing name: C:\Users\clientz\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins_GA\CADD\CONSTR\75670007 - 07 - GRADING.dwg GRADING PLAN Jul 09, 2026 10:52am by: clientz

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company, Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026