FIFTH THIRD

WATSON, GA

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093
KAHUA PROJECT #: K1130695
PROJECT #: 26032

FLORIDA PRODUCT APPROVAL

PRODUCT TYPE	MANUFACTURER	MODEL # / SERIES	FL PRODUCT APPR. NO.	MIAMI DADE N.O.A.
EXTERIOR PANELS				
SWINGING-CURTAINWALL	KAWNEER	350T INSULPOUR IMPACT RESISTANT. 10" BOTTOM STILE	FL 28914.1-R5	N/A
SWINGING - STOREFRONT	KAWNEER	350T INSULPOUR IMPACT RESISTANT. 10" BOTTOM STILE	FL 28914.1-R5	N/A
SWINGING - EXT. DOOR ASSEMBLY	CECO DOOR PRODUCT	OUTSWINGING COMMERCIAL DOOR	FL 16355.2 - R4	N/A
WALL PANELS				
IMPACT RESISTANT CURTAIN WALL	KAWNEER	1600 WALL SYSTEM 1	FL 5388.2 - R12	N/A
IMPACT RESISTANT STOREFRONT	KAWNEER	TRIFAB VERSAGLAZE 451T, 1" INSULATED CENTER SET GLASS	FL 14287.1 - R10	N/A
ALUMINUM COMPOSITE METAL PANEL	ALCOA ARCHITECTURAL REYNOBOND	REYNOBOND COMPOSITE PANELS	FL 11794 - R3	N/A
EIFS	DRYVIT	DRYVIT OUTSULATION PLUS MD	FL 3423.3 - R12	N/A
ROOFING PRODUCTS				
TPO ROOFING SYSTEM	FIRESTONE	ULTRA PLY TPO SINGLE PLY ROOFING SYSTEM - STEEL DECKS	FL 10264 - R19	N/A
ROOF HATCH	BILCO	S-50	FL 15110.1 - R6	N/A
ROOFING BOARD	USG	SECUROCK GYPSUM FIBER ROOF BOARD	FL 4264.1 - R9	N/A
ROOFING FASTENERS	METAL ERA	METAL ERA ROOF EDGE TERMINATION SYSTEM	FL 29463.1 - R2	N/A
OTHER PRODUCTS				
CONCRETE LINTELS	CAST-CRETE USA	HIGH STRENGTH PRECAST AND PRESTRESS CONCRETE LINTEL	FL 158.1 - R17	N/A
INTERIOR STOREFRONT DOOR	KAWNEER	350 STANDARD ENTRANCE. 10" BOTTOM RAIL	FL 10388.1 - R6	N/A

SYMBOLS

X	WALL TYPE	ROOM XXX	ROOM TAG	1 A1.0	DETAIL TAG	1 A1.0	PLAN DETAIL TAG
#	REVISION NUMBER	101A	DOOR TAG	N W A1.0 E S	INTERIOR ELEVATION TAG	1 A1.0	BUILDING SECTION TAG
FINISH	FINISH TAG	F10	WINDOW TAG				
X	KEYNOTE	ELEVATION 0'-0"	ELEVATION DATUM TAG	1 A1.0	EXTERIOR ELEVATION TAG	1	GRID BUBBLE & CENTER LINE

OWNER & CONSULTANTS

OWNER
FIFTH THIRD BANK
TAMMALA BROOKS
VICE PRESIDENT
DIRECTOR - PROJECT GROUP
FIFTH THIRD BANK RETAIL
38 FOUNTAIN SQUARE PLAZA
MD 10903K
CINCINNATI, OH 45202
TAMMALA.BROOKS@53.COM

CIVIL / LANDSCAPE / MEP
GASKINS + LECRAW
1266 POWDER SPRINGS RD SW
MARIETTA, GA 30064
CONTACT: MICHELLE MACAULEY
678.257.1914

ARCHITECT
PRAXIS3, LLC
100 PEACHTREE ST NW,
SUITE. 1450
ATLANTA, GA 30303
CONTACT: STUART ROMM
678.904.7422

STRUCTURAL
MARK NANNIS STRUCTURAL
ENGINEERS, INC.
2060 BUFORD HIGHWAY SUITE 106
BUFORD, GA 30518
CONTACT: MARK NANNIS
770.310.8472

OWNER AGENT
CBRE GLOBAL
DARLECIA RHONE
PROJECT MANAGER
CBRE GLOBAL WORKPLACE
T: 1.678.216.8407
E: DARLECIA.RHONE@CBRE.COM

MECHANICAL/PLUMBING
BARRETT, WOODYARD &
ASSOCIATES
310 TECHNOLOGY SUITE 200
PEACHTREE CORNERS, GA 30092
CONTACT: GARRY JENKINS
678.654.6707

ELECTRICAL
BARRETT, WOODYARD &
ASSOCIATES
310 TECHNOLOGY SUITE 200
PEACHTREE CORNERS, GA 30092
CONTACT: RAHN WILLIAMS
678.301.2227

UTILITIES

SANITARY SEWER AND WATER
WARNER ROBINS UTILITIES
MAINTENANCE DEPARTMENT
95 GLENN DRIVE
WARNER ROBINS, GA 31088
WILLIAM ABARCA
WABARCA@WRGA.GOV
478.302.5438

ELECTRIC & TELEPHONE
FINT ENERGIES
98 CARL VINSON PARKWAY
WARNER ROBINS, GA 31088
LEE MARSH
LMARSH@FLINTEMC.COM
478.988.3950

VICINITY MAP

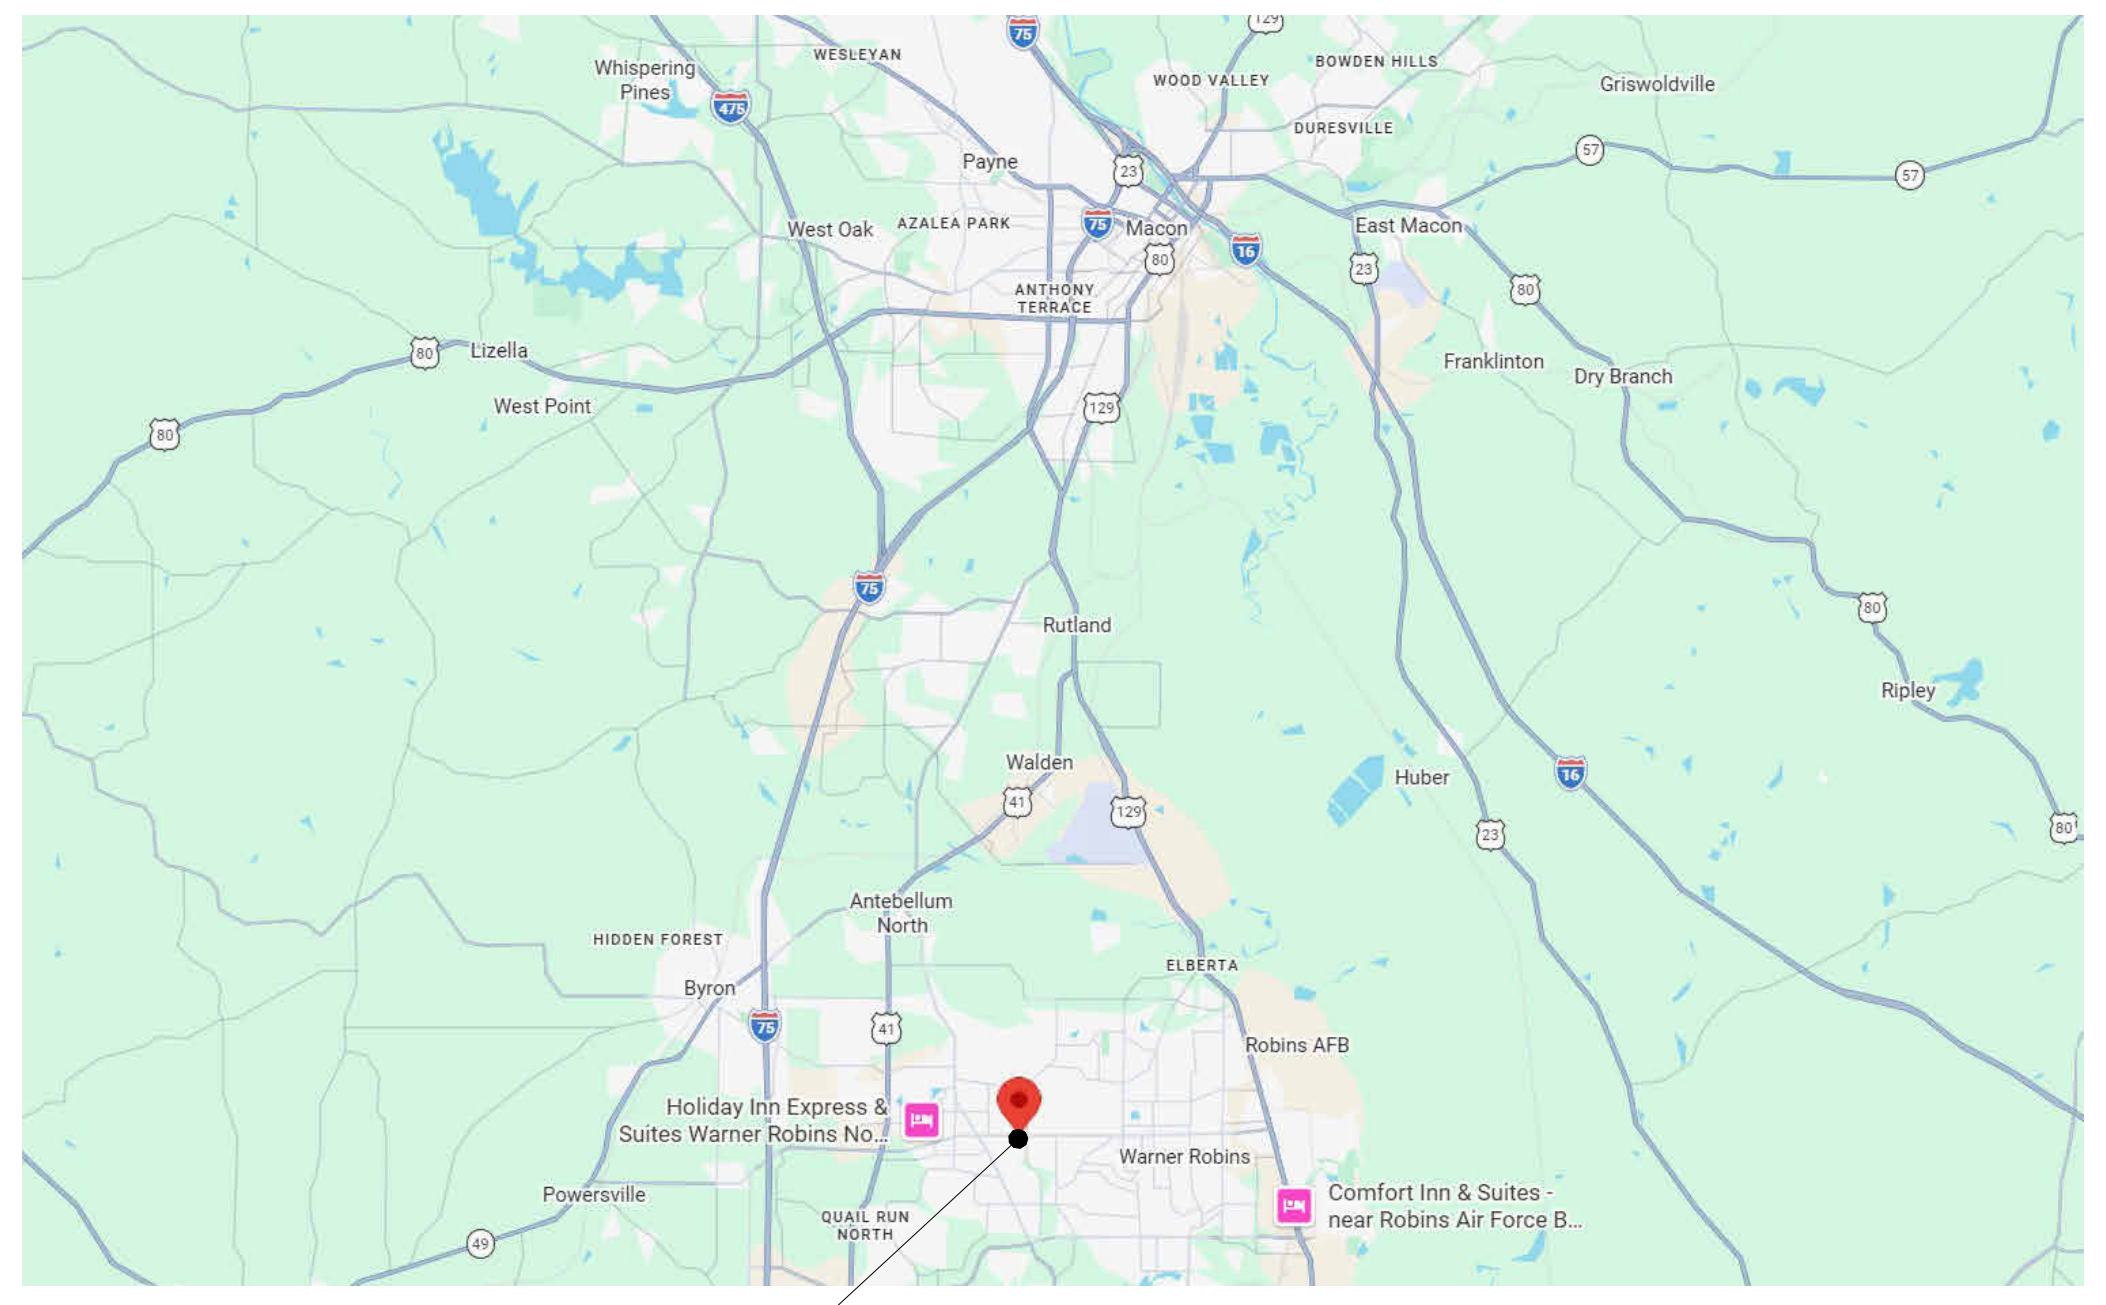

PROJECT LOCATION

LOCATION MAP

PROJECT LOCATION

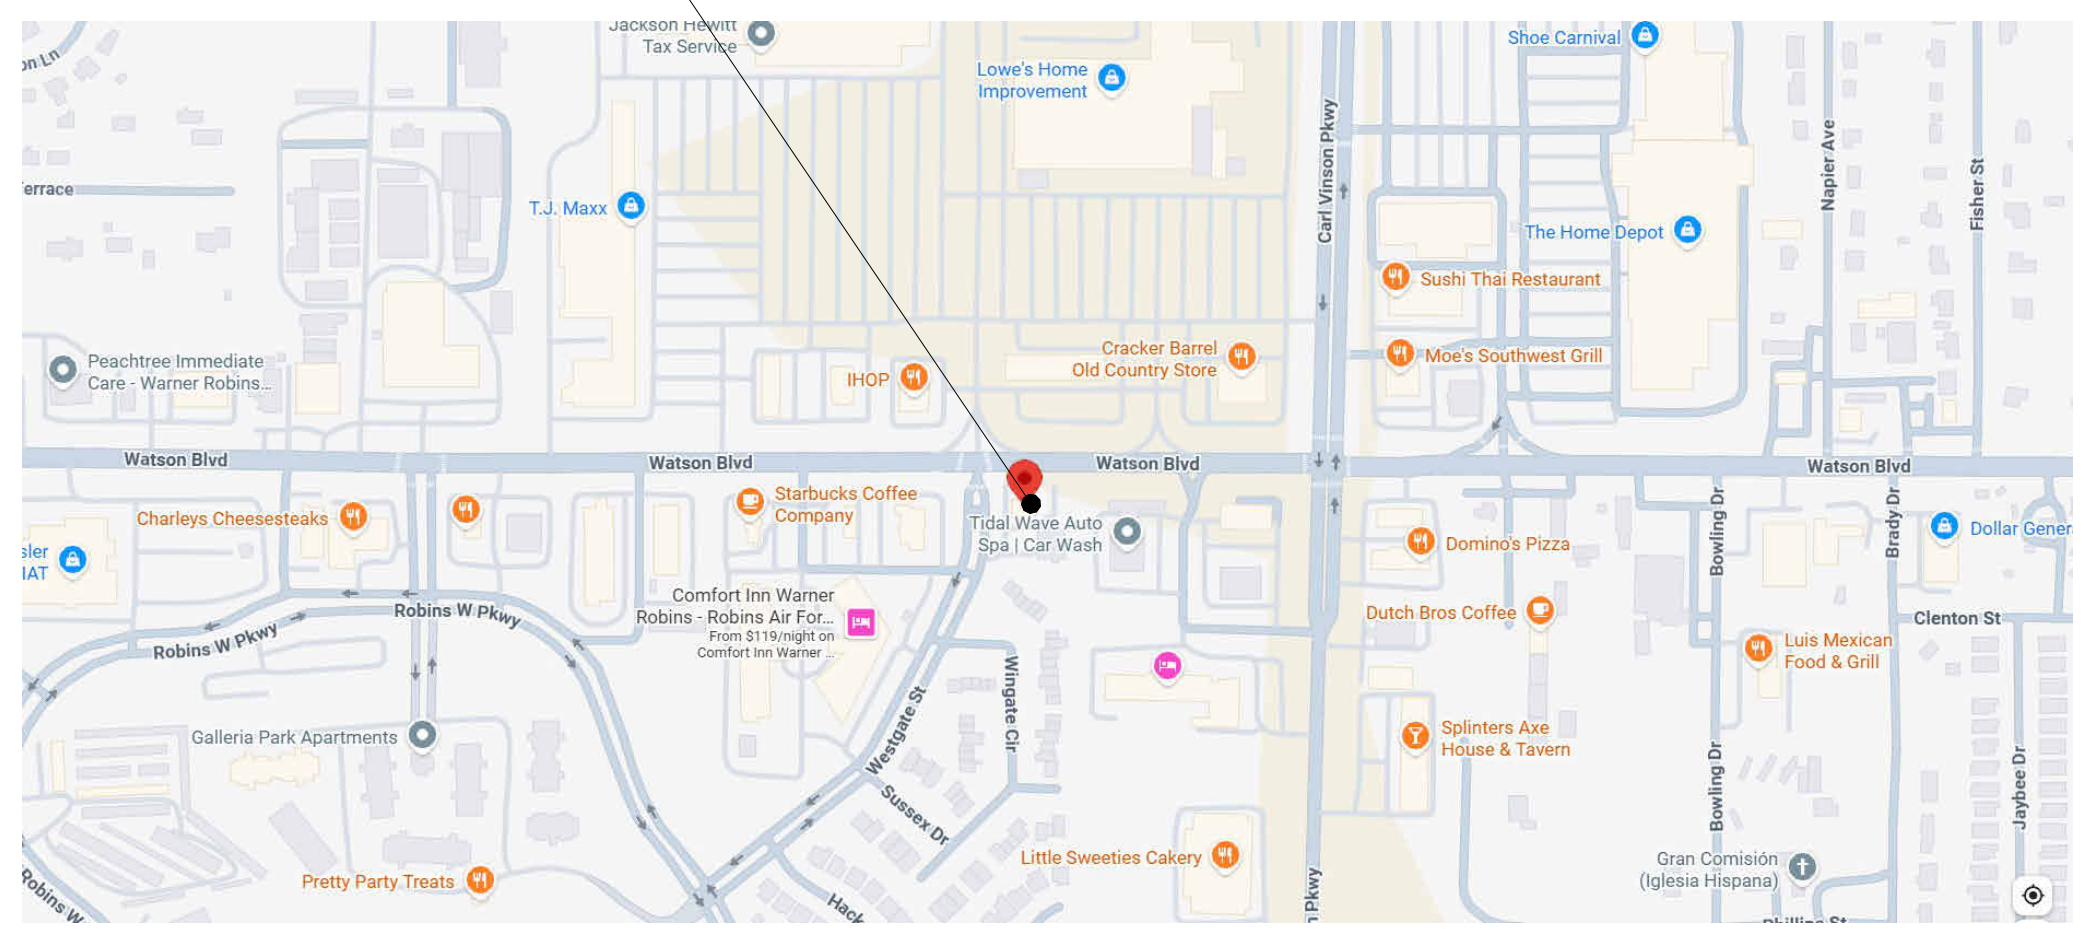

GENERAL NOTES

1. THE CONSTRUCTION NOTES AND DRAWINGS ARE SUPPLIED TO ILLUSTRATE THE DESIGN AND GENERAL TYPE OF CONSTRUCTION DESIRED AND ARE INTENDED TO IMPLY THE FINEST QUALITY OF CONSTRUCTION, MATERIAL AND WORKMANSHIP THROUGHOUT.
2. ALL WORK SHALL BE IN COMPLIANCE WITH APPLICABLE FEDERAL, STATE AND LOCAL BUILDING CODES, REGULATIONS, ORDINANCES & STANDARDS INCLUDING ADA & OTHER HANDICAP ACCESSIBILITY CODES.
3. PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION, CONTRACTOR SHALL VERIFY EXISTENCE AND LOCATION OF ALL ABOVE AND BELOW GRADE, UTILITIES, INCLUDING SANITARY SEWER, STORM SEWER, WATER, GAS, ELECTRICAL, TELEPHONE, ETC. ANY DISCREPANCIES IN UTILITY LOCATIONS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT. GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR SET UP AND COORDINATION OF ALL UTILITY SERVICES FOR THE PROJECT.
4. GENERAL CONTRACTOR SHALL COORDINATE SCHEDULING AND SEQUENCING OF THE WORK WITH OWNER'S REPRESENTATIVE. GENERAL CONTRACTOR IS RESPONSIBLE FOR COORDINATING THE OWNER'S VENDORS ON SITE DURING CONSTRUCTION.
5. GENERAL CONTRACTOR SHALL PROVIDE AN AS-BUILT SET OF DRAWINGS TO THE [SUPERVISOR(PROJECT MANAGEMENT)] (SPM) AT THE END OF THE PROJECT.
6. GENERAL CONTRACTOR WILL SECURE ALL BUILDING PERMITS & INSPECTIONS NECESSARY FOR THE CONSTRUCTION OF THE PROJECT. UPON COMPLETION OF PROJECT, OBTAIN ALL FINAL INSPECTIONS AS REQUIRED BY LOCAL JURISDICTIONS AND FURNISH OWNER WITH EVIDENCE OF ALL SUCH INSPECTIONS AND CERTIFICATES OF OCCUPANCY.
7. THE GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS PRIOR TO BEGINNING CONSTRUCTION AND REPORT ANY ERRORS OR INCONSISTENCIES TO THE ARCHITECT.
8. THE DRAWINGS ARE NOT TO BE SCALED. LARGE SCALE DRAWINGS HAVE PRECEDENCE OVER SMALL SCALE DRAWINGS.
9. THE CONTRACTOR, WITHOUT EXTRA CHARGE, SHALL MAKE SLIGHT ALTERATIONS - CUTTING, FITTING, OR PATCHING OF HIS WORK AS MAY BE NECESSARY TO MAKE ADJUSTABLE PARTS FIT TO FIXED PARTS, LEAVING ALL IN WORKING ORDER WHEN COMPLETED.
10. WHERE TRENCHING OR CORE DRILLING IS REQUIRED, SUBFLOORING AND/OR SUBSTRATE SHALL BE RETURNED TO A LEVEL CONDITION.
11. GENERAL CONTRACTOR SHALL PROVIDE TERMITE PROTECTION, TO COMPLY WITH FBC 1816.1, UNDER ANY TRENCHING WORK.
12. GENERAL CONTRACTOR IS RESPONSIBLE FOR ALL SITE CUT & FILL TO ATTAIN FINISH GRADES AS INDICATED ON THESE DRAWINGS. GENERAL CONTRACTOR SHALL INCLUDE THE COST OF ANY TOPSOIL REQUIRED IN ADDITION TO THAT ON SITE, AT THE TIME OF THE PRE-BID MEETING, IN BASE BID.
13. GENERAL CONTRACTOR TO BE RESPONSIBLE FOR SITE CLEAN UP NIGHTLY AND SECUREMENT OF THE WORK SITE.
14. ALL NEW CONSTRUCTION SHALL BE VERIFIED TO BE IN COMPLIANCE WITH THE LOCALLY ADOPTED ACCESSIBILITY REGULATIONS. ANYTHING FOUND NOT IN COMPLIANCE SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE. ALL SLOPES SHALL BE MEASURED WITH A 24" SMART LEVEL.
15. GENERAL CONTRACTOR SHALL PERFORM AS NECESSARY A TOPOGRAPHIC SURVEY PRIOR TO STARTING CONSTRUCTION AND REPORT ANY DISCREPANCIES IN GRADES AS COMPARED TO EXISTING GRADES INDICATED ON DRAWINGS. SUBMIT A COPY OF TOPOGRAPHIC SURVEY TO ARCHITECT AND INDICATE ANY DISCREPANCIES ON SURVEY PRIOR TO COMMENCING EARTHWORK WHEN SCOPE OF THE PROJECTS NECESSITATES IT.
16. NOTED ACCESSIBLE ITEMS AND DESCRIPTIONS FOR PARKING LOT, ARE TO BE A PORTION OF THE SHOWN ACCESSIBILITY WORK. COORDINATED WITH PROJECT MANAGER AS REQUIRED TO COMPLETE THE NOTED WORK. WHERE GRADES ARE AFFECTED THE CONTRACTOR SHALL USE A SURVEYOR AS NEEDED TO ENSURE PROPER GRADES ARE ACHIEVED. STRIPING SHALL BE COMPLETED PER THE REQUIREMENTS OF THE CURRENT ADAAG GUIDELINES, AND THE CUSTOMER PATH OF TRAVEL REMEDIATION GUIDELINES (LATEST REVISION) AS WELL AS APPLICABLE STATE AND LOCAL CODES.

DRAWINGS		DRAWINGS ISSUED										
SHEET #	SHEET NAME	07/02/2026 - PERMIT SET										
GENERAL												
G-000	COVER SHEET	●										
G-001	LIFE SAFETY PLAN	●										
G-002	ACCESSIBILITY NOTES	●										
G-003	COMCHECK	●										
CIVIL												
C-0.0	COVER	●										
C-0.1	GENERAL NOTES	●										
C-0.11	GENERAL	●										
C-0.12	GENERAL	●										
C-1.0	DEMOLITION PLAN	●										
C-2.0	ESPC - PHASE 1	●										
C-2.1	ESPC - PHASE 2	●										
C-2.2	ESPC - PHASE 3	●										
C-2.3	ESPC NOTES - 1	●										
C-2.4	ESPC NOTES - 2	●										
C-2.5	ESPC DETAILS - 1	●										
C-2.6	ESPC DETAILS - 2	●										
C-3.0	SITE PLAN	●										
C-4.0	GRADING PLAN	●										
C-5.0	UTILITY PLAN	●										
C-6.0	STORM PROFILES	●										
C-6.1	SANITARY PROFILES	●										
C-7.0	CONSTRUCTION DETAILS - 1	●										
C-7.1	CONSTRUCTION DETAILS - 2	●										
C-7.2	CONSTRUCTION DETAILS - 3	●										
C-7.3	CONSTRUCTION DETAILS - 4	●										
C-7.4	CONSTRUCTION DETAILS - 5	●										
LANDSCAPE												
L-1.0	LANDSCAPE PLAN	●										
L-1.1	LANDSCAPE DETAILS	●										

DRAWINGS		DRAWINGS ISSUED										
SHEET #	SHEET NAME	07/02/2026 - PERMIT SET										
ARCHITECTURAL												
A-110	FLOOR PLAN	●										
A-120	DIMENSIONAL FLOOR PLAN	●										
A-130	REFLECTED CEILING PLAN	●										
A-131	ENLARGED REFLECTED CEILING PLAN	●										
A-140	ROOF PLAN	●										
A-150	FINISH PLAN	●										
A-160	FURNITURE & EQUIPMENT	●										
A-170	SCHEDULES	●										
A-190	TRASH ENCLOSURE AND DETAILS	●										
A-200	EXTERIOR ELEVATIONS	●										
A-201	EXTERIOR ELEVATIONS	●										
A-202	COLOR EXTERIOR ELEVATIONS	●										
A-300	BUILDING SECTIONS	●										
A-310	EXTERIOR WALL SECTIONS	●										
A-311	EXTERIOR WALL SECTIONS	●										
A-401	BANK EQUIPMENT PLANS & DETAILS	●										
A-402	BANK EQUIPMENT CUT SHEETS	●										
A-410	ENLARGED RESTROOM PLANS & ELEVATIONS	●										
A-420	ENLARGED WING WALL PLANS & ELEVATIONS	●										
A-430	SECTION DETAILS	●										
A-440	PLAN DETAILS	●										
A-450	ROOF DETAILS	●										
A-600	DOOR SCHEDULE & DETAILS	●										
A-601	HARDWARE SCHEDULES	●										
A-610	WINDOW ELEVATIONS	●										
A-620	INTERIOR PARTITION SCHEDULE & DETAILS	●										
A-630	CEILING DETAILS	●										
A-700	TRANSACTION BAR - ENLARGED PLAN & DETAILS	●										
A-701	BACK COUNTER - ENLARGED PLAN & DETAILS	●										
A-702	LIBRARY - ENLARGED PLAN & DETAILS	●										
A-703	SERVICE COUNTER - ENLARGED PLAN & DETAILS	●										
A-704	TECH WALL & LOUNGE BOOTH - ENLARGED PLAN & DETAILS	●										
A-705	EMPLOYEE LOUNGE - ENLARGED PLAN & DETAILS	●										
A-706	BOOTH - ENLARGED PLAN & DETAILS	●										
A-707	WORK ROOM - ENLARGED PLAN & DETAILS	●										
A-708	CHECK DESK - ENLARGED PLAN & DETAILS	●										
STRUCTURAL												
S-001	GENERAL NOTES	●										
S-002	GENERAL NOTES	●										
S-003	SPECIAL INSPECTIONS SCHEDULES	●										
S-201	STRUCTURAL PLAN - FOUNDATION	●										
S-203	STRUCTURAL PLAN - ROOF	●										
S-301	ELEVATIONS - STEEL FRAMES	●										
S-410	EXTERIOR AXONOMETRICS	●										
S-411	EXTERIOR AXONOMETRICS	●										
S-600	WALL SECTIONS - FOUNDATION	●										
S-601	WALL SECTIONS	●										
S-602	WALL SECTIONS	●										
S-603	WALL SECTIONS	●										
S-680	TYPICAL DETAILS (FOUNDATION)	●										
S-681	TYPICAL DETAILS (STEEL)	●										
S-682	TYPICAL DETAILS (STEEL)	●										
S-683	ENLARGED STEEL DETAILS	●										
S-685	TYPICAL DETAILS (MISC)	●										
MECHANICAL												
M-001	MECHANICAL NOTES AND SPECIFICATIONS	●										
M-002	MECHANICAL NOTES AND LEGEND	●										
M-101	MECHANICAL SCHEDULES	●										
M-102	MECHANICAL VENTILATION SCHEDULES	●										
M-301	MECHANICAL PROPOSED CEILING PLAN	●										
M-302	MECHANICAL PROPOSED ROOF PLAN	●										
M-401	MECHANICAL ISOMETRIC PLAN	●										
M-501	MECHANICAL DETAILS	●										
M-502	MECHANICAL DETAILS AND CONTROLS	●										
M-503	MECHANICAL CONTROLS DETAILS	●										
M-700	MECHANICAL DUCT SECTION VIEWS	●										
PLUMBING												
P-001	PLUMBING SPECIFICATIONS AND NOTES	●										
P-101	PLUMBING TABLES AND SCHEDULES	●										
P-301	PLUMBING SANITARY FOUNDATION PLAN	●										
P-302	PLUMBING DOMESTIC FLOOR PLAN	●										
P-303	PLUMBING PROPOSED ROOF PLAN	●										
P-401	PLUMBING BUILDING ISOMETRIC	●										
P-402	PLUMBING ISOMETRIC RISER DIAGRAM	●										
P-403	PLUMBING NATURAL GAS ISO PLAN	●										
P-501	PLUMBING DETAILS	●										
ELECTRICAL												
E-001	ELECTRICAL LEGEND AND ABBREVIATION	●										
E-002	ELECTRICAL GENERAL NOTES	●										
E-003	ELECTRICAL SPECIFICATIONS	●										
E-004	COMCHECK	●										
E-010	ELECTRICAL SITE PLAN AND REMOTE DRIVE THRU	●										
E-011	ELECTRICAL PHOTOMETRIC SITE PLAN	●										
E-012	ELECTRICAL SITE DETAILS	●										
E-100	ELECTRICAL POWER & AUXILIARY PLAN	●										
E-101	ELECTRICAL POWER ROOF PLAN	●										
E-130	ELECTRICAL LIGHTING PLAN	●										
E-150	ELECTRICAL SECURITY PLAN	●										
E-160	ELECTRICAL FIRE ALARM PLAN	●										
E-500	ELECTRICAL DETAILS	●										
E-600	LUMINAIRE AND SENSOR SCHEDULES AND DETAILS	●										
E-601	EXTERIOR LIGHTING CUTSHEETS	●										
E-602	EXTERIOR LIGHTING CUTSHEETS	●										
E-603	EXTERIOR LIGHTING CUTSHEETS	●										
E-610	ELECTRICAL PANEL SCHEDULES	●										
E-700	ELECTRICAL DEVICE PLAN	●										
E-701	ELECTRICAL ELEVATIONS	●										
E-702	ELECTRICAL ELEVATIONS	●										
E-703	ELECTRICAL ELEVATIONS	●										
E-704	ELECTRICAL ELEVATIONS	●										
E-800	ELECTRICAL RISER DIAGRAM	●										
FIRE ALARM												
FA-001	FIRE ALARM LEGEND AND GENERAL NOTES	●										
FA-002	FIRE ALARM RISER & DETAILS	●										
FA-101	FIRE ALARM PLAN	●										
SECURITY (FOR REFERENCE ONLY)												
BS01	SECURITY DEVICE LOCATIONS	●										
BS02	CCTV SWEEPS	●										
BS03	PACOM PANEL DETAILS	●										
BS04	ELECTRICAL DEVICE LOCATIONS	●										

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STUART M. ROMM
07/02/26
CERTIFICATE NO. 3452

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
COVER SHEET

Sheet Number:
G-000

7/8/2026 2:37:26 PM

7/8/2026 2:37:34 PM

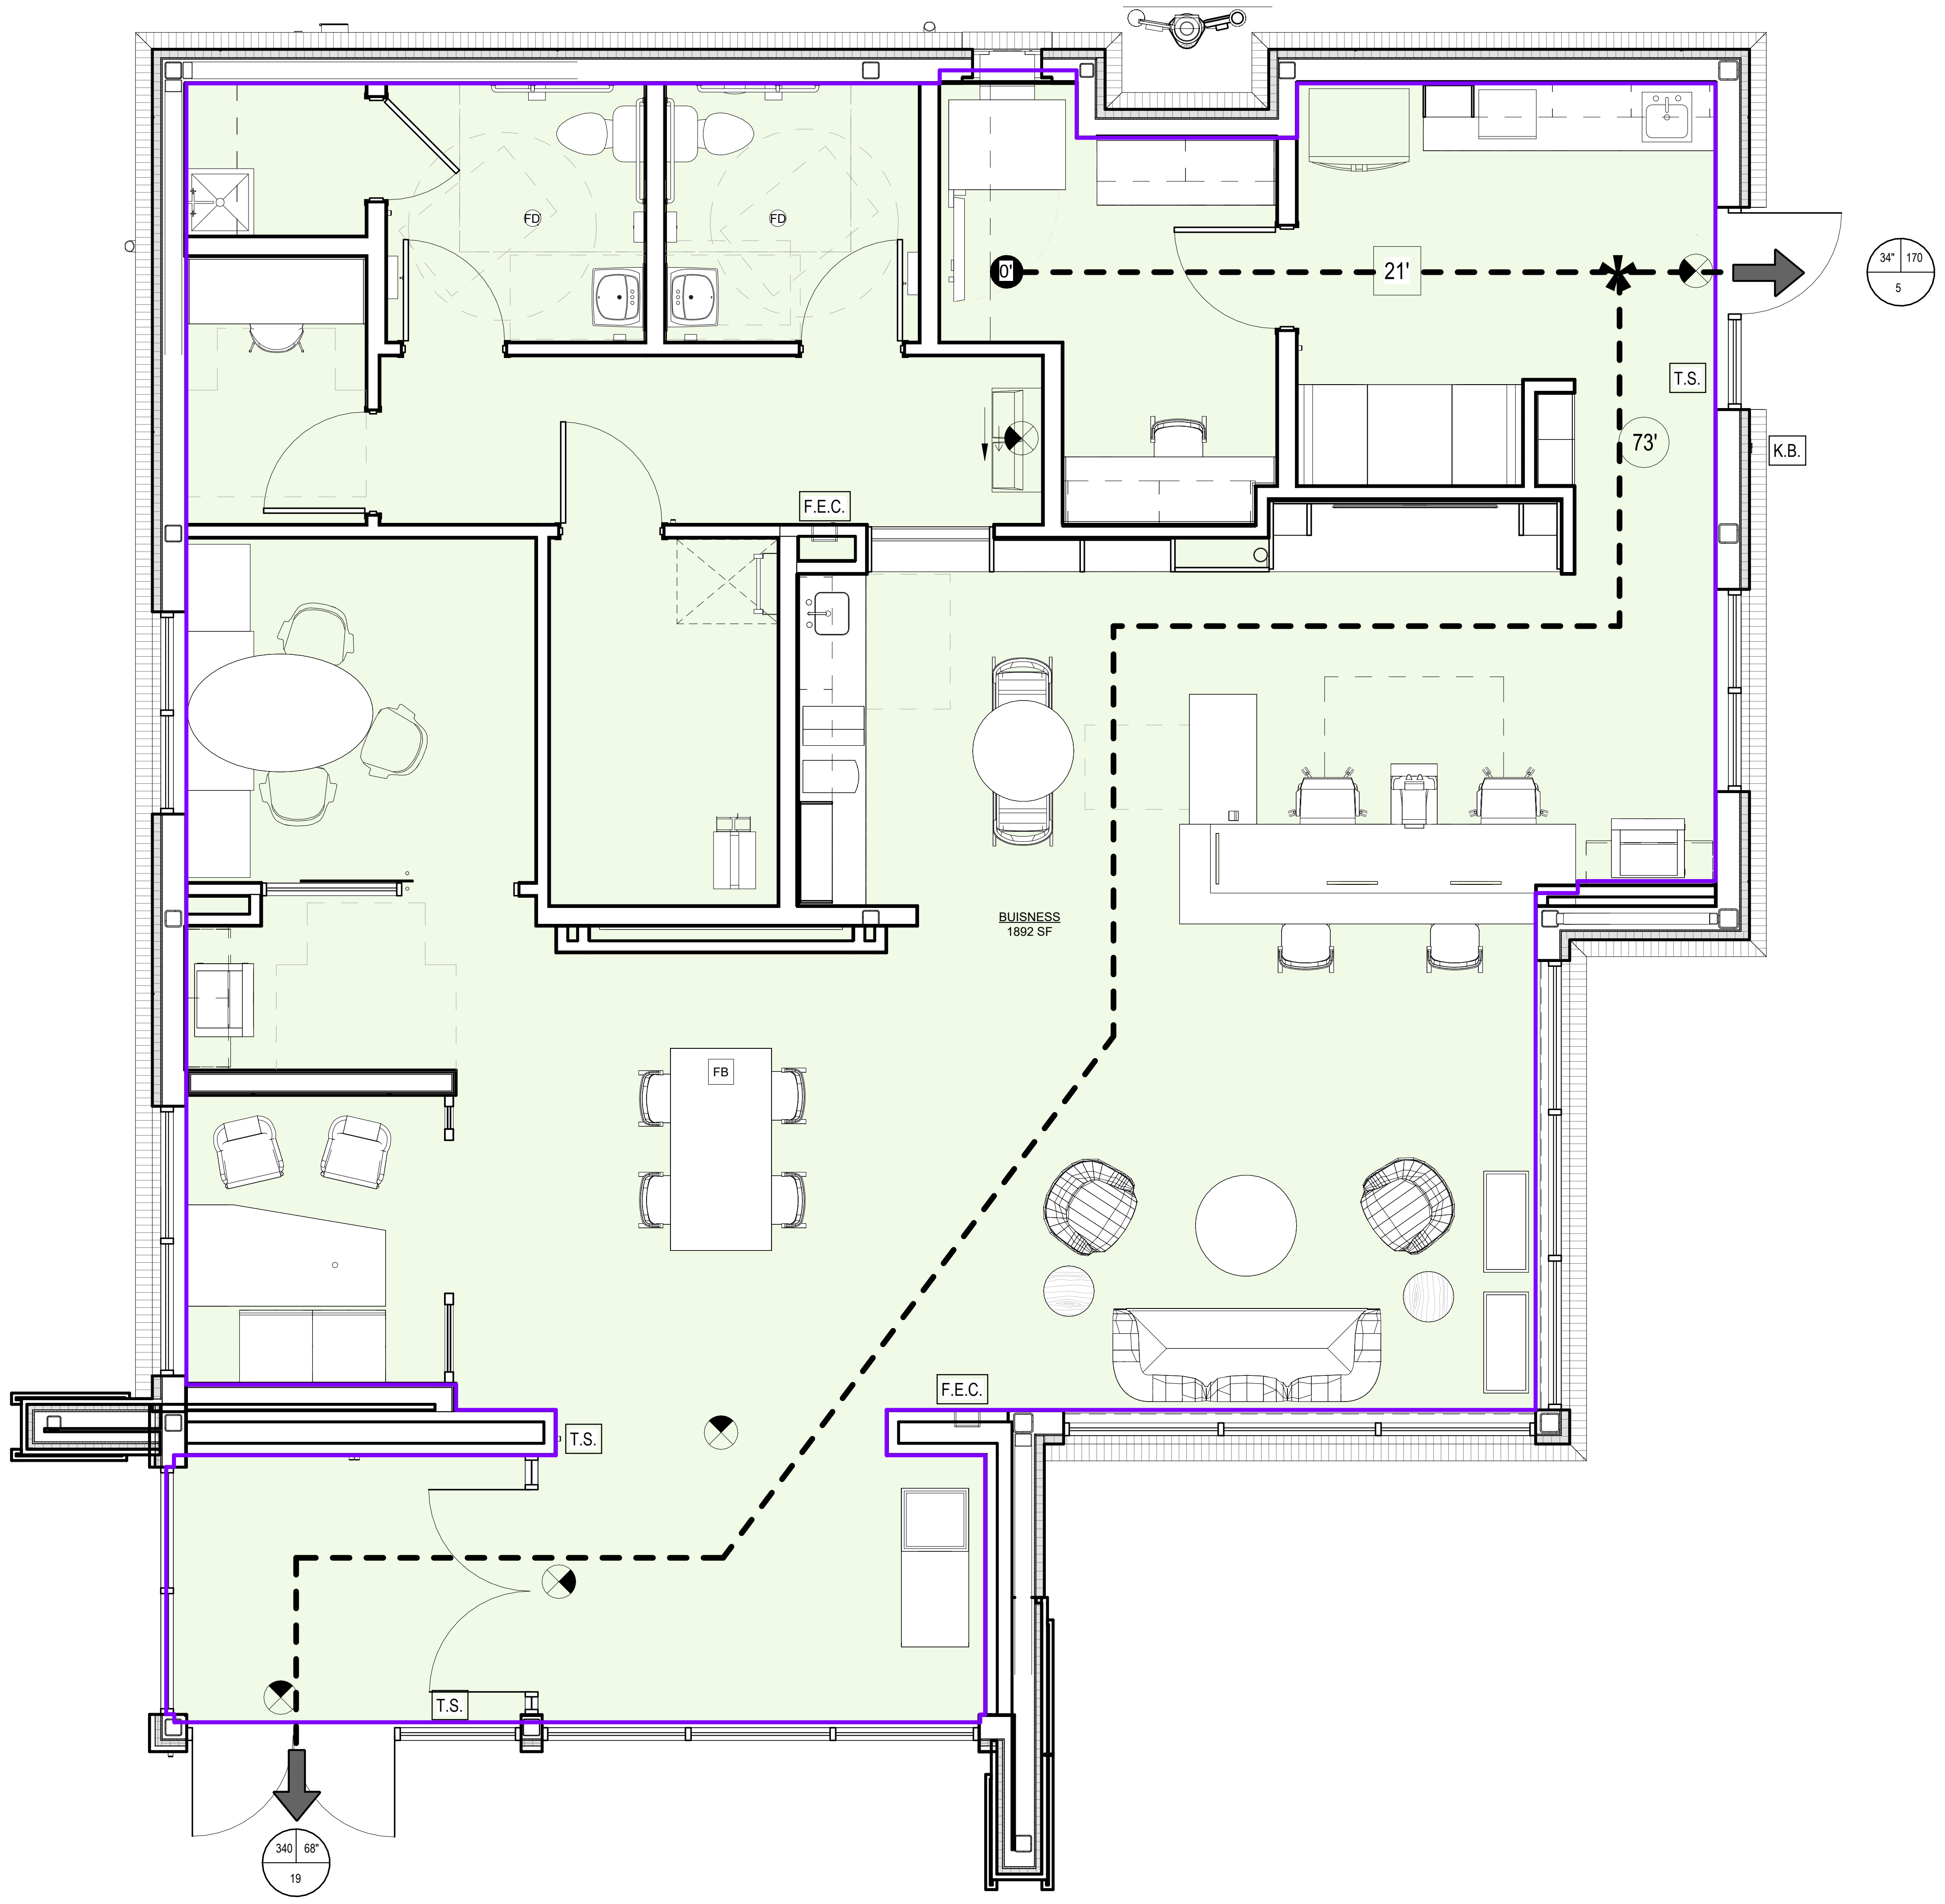

NOTE: PROJECT NORTH IS FOR CONSTRUCTION PURPOSES ONLY. REFER TO CIVIL DRAWING FOR TRUE NORTH AND CORRECT BUILDING ORIENTATION AS IT RELATES TO THE SITE.

N

LIFE SAFETY PLAN | 1/4" = 1'-0" | 1

LIFE SAFETY GENERAL NOTES

1. PROVIDE FIRE EXTINGUISHERS PER NFPA10 AS REQUIRED
2. PROVIDE 1 FOOTCANDLE FOR EMERGENCY LIGHTING

LIFE SAFETY NOTES

➡	EMERGENCY EXIT
○- ->	TRAVEL DISTANCE
□- ->	COMMON PATH OF TRAVEL
⊗	EXIT SIGN
F.E.	SURFACE MOUNTED FIRE EXTINGUISHER 10LB UL RATED 4A:80B:C
F.E.C.	RECESSED FIRE EXTINGUISHER CABINET 10LB UL RATED 4A:80B:C
M.C.#	MAXIMUM CAPACITY SIGNAGE TO READ AS FOLLOWS: "MAXIMUM OCCUPANT LOAD XXX PERSONS BY ORDER OF THE FIRE MARSHAL" REFER TO A-410 FOR MOUNTING INFORMATION
T.S.	TACTILE SIGNAGE PER NFPA 101-7.10.13, REFER TO G-002 FOR MOUNTING INFORMATION
K.B.	KNOX BOX. VERIFY LOCATION WITH LOCAL MUNICIPALITY TO INSURE COMPLIANCE
*	COMMON PATH OF TRAVEL POINT OF DECISION
●	MOST REMOTE POINT ON FLOOR FROM AN EXIT
A B C	A. CLEAR EXIT WIDTH B. MAXIUM CALCULATED OCCUPANT LOAD EACH EXIT DOOR CAN ACCOMMODATE BASED ON EGRESS WIDTH (1005.3.2) C. ACTUAL OCCUPANT LOAD FOR EACH DOOR

CODE INFORMATION

JURISDICTION: CITY OF WARNER ROBINS, GA

APPLICABLE CODES

- 2024 INTERNATIONAL BUILDING CODE WITH GA AMENDMENTS
- 2024 INTERNATIONAL FIRE CODE
- 2024 INTERNATIONAL PLUMBING CODE WITH GA AMENDMENTS
- 2024 INTERNATIONAL MECHANICAL CODE WITH GA AMENDMENTS
- 2024 INTERNATIONAL FUEL & GAS CODE WITH GA AMENDMENTS
- 2023 NATIONAL ELECTRICAL CODE WITH GA AMENDMENTS
- 2015 INTERNATIONAL ENERGY CONSERVATION CODE WITH GA AMENDMENTS
- 2018 LIFE SAFETY CODE WITH GA AMENDMENTS NFPA 101
- GEORGIA ACCESSIBILITY CODE
- STANDARDS FOR ACCESSIBLE DESIGN ADA (2010)

PROJECT DATA

OCCUPANCY LOAD	(TBL 1004.5/ SEC. 1004)	**AREA**	**TOTAL**
BUSINESS	1 PER 150 GSF	1900 GSF	13 OCC
TOTAL		1900 GSF	13 OCC

MEANS OF EGRESS	**REQUIRED**	**PROVIDED**
EXIT ACCESS TRAVEL DISTANCE (NFPA 38.2.6.2)	200' MAX	94'-2" MAX
COMMON PATH OF TRAVEL (NFPA 38.2.5.2.3)	100' MAX	N/A
DEAD END CORRIDOR (NFPA 38.2.5.3.2)	20' MAX	N/A
CORRIDOR WIDTH (NFPA 7.3.4.1 (2) <50 OCC PER 38.2.3.2)	44" MIN	60" MIN
MINIMUM NUMBER OF EXITS REQUIRED (NFPA 38.2.4.3)	1 EXIT	2 EXITS
EXIT WIDTH (NFPA TBL 7.3.3.1)	(0.2") 4" REQ'D PER OCCUPANT	68"
STAIR WIDTH (NFPA TBL 7.3.3.1)	(0.3") 6" REQ'D PER OCCUPANT	N/A

CONSTRUCTION TYPE (TBL 601)		VB
FIRE RESISTANCE REQUIREMENTS	**REQUIRED**	**PROVIDED**
STRUCTURAL FRAMING	0 HOUR	0 HOUR
EXTERIOR & INTERIOR BEARING WALLS	0 HOUR	0 HOUR
EXTERIOR NON-BEARING WALLS	0 HOUR	0 HOUR
INTERIOR NON-BEARING WALLS	0 HOUR	0 HOUR
FLOOR CONSTRUCTION	0 HOUR	0 HOUR
ROOF CONSTRUCTION	0 HOUR	0 HOUR

ALLOWABLE BUILDING HEIGHTS & AREA	**REQUIRED**	**PROVIDED**
ALLOWABLE AREA (506.2)	9,000 SF	1892 S.F.
ALLOWABLE HEIGHT (504.3)	40 FT	18'-8"
ALLOWABLE STORIES (504.4)	2 STORIES	1 STORY

INTERIOR FINISHES (803.11)	**REQUIRED**	**PROVIDED**
EXIT ENCLOSURES, EXIT PASSAGEWAYS & CORRIDORS	CLASS A	CLASS A
ROOMS AND ENCLOSED SPACES	CLASS C	CLASS C

FIRE PROTECTION SYSTEMS (901.2) (NFPA 38.3.5)	**REQUIRED**	**PROVIDED**
SPRINKLER SYSTEM (903.1)	N/A	N/A
FIRE EXTINGUISHERS (906.1)	PER 906.3	2

PLUMBING FIXTURE COUNT	**M /F (REQUIRED)**	**MALE (PROVIDED)**	**FEMALE (PROVIDED)**
OCCUPANCY LOAD/ 2	13/2 = 7 EA	-	-
WATER CLOSET (1:25)	1 PER 25 (FOR THE FIRST 50 OCCUP)	1 W.C.	1 W.C.
URINALS (2/3 SUBSTITUTION ALLOWED)	N/A	N/A	N/A
LAVATORIES (1:40)	1 PER 40 (1ST 80 OCC)	1 LAVS.	1 LAVS.
UNISEX RESTROOMS	N/A	N/A	N/A
TOTAL W.C. REQUIRED		1 W.C.	1 W.C.
DRINKING FOUNTAINS (1 / 500)	1 REQUIRED	2 PROVIDED	
SERVICE SINK	1 REQUIRED	1 PROVIDED	

NFPA REQUIREMENTS		
OCCUPANCY (6.1.11)		BUSINESS
CONSTRUCTION TYPE (TBL A.4.1.1)		V

ALLOWABLE BUILDING HEIGHTS & AREA	**REQUIRED**	**PROVIDED**
ALLOWABLE AREA	9,000 SF	1,900 GSF
ALLOWABLE HEIGHT	40 FT	18'-8"
ALLOWABLE STORIES	2 STORIES	1 STORY
EXIT REQUIREMENTS (13.2.4)	1 EXIT	2 EXITS

INTERIOR FINISHES (10.2.2.1)	**REQUIRED**	**PROVIDED**
EXIT ENCLOSURE WALL & CEILING FINISHES (7.1.4.1)	CLASS A	CLASS A
FLOOR FINISHES (7.1.4.2)	CLASS I or II	CLASS I or II

FIRE PROTECTION SYSTEMS	**REQUIRED**	**PROVIDED**
SPRINKLER SYSTEM (9.7.1.1)	--	--
FIRE EXTINGUISHER (38.3.5)	--	--

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303

404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA REGISTERED ARCHITECT
Stuart Romm
STUART M. ROMM
07/02/26
CERTIFICATE NO. 3452

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:

FIFTH THIRD BANK

Project Number: 26302
Project Name:

WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:

LIFE SAFETY PLAN

Sheet Number:

G-001

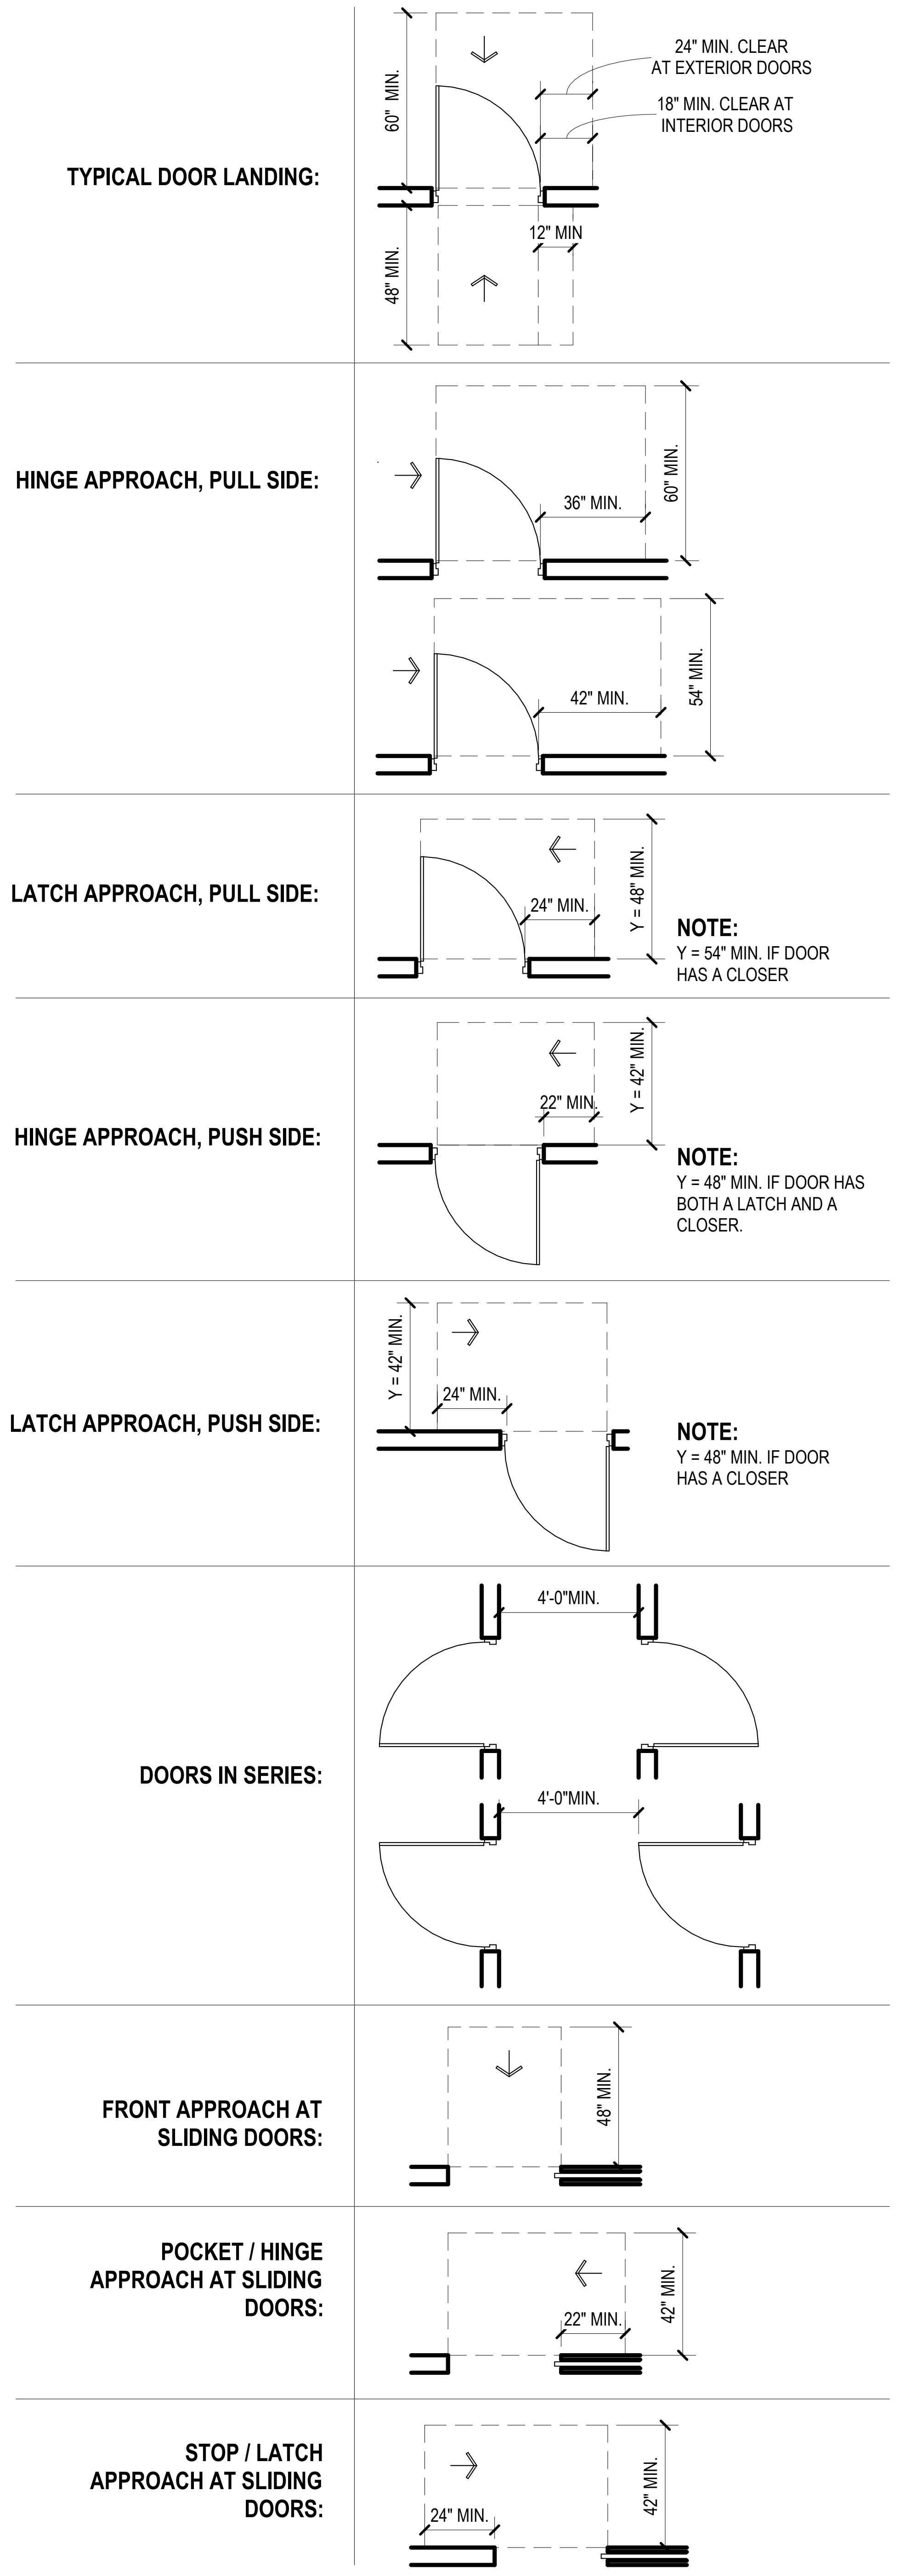
TYPICAL DOOR LANDING:
24" MIN. CLEAR AT EXTERIOR DOORS
18" MIN. CLEAR AT INTERIOR DOORS
60" MIN.
48" MIN.
12" MIN
HINGE APPROACH, PULL SIDE:
36" MIN.
60" MIN.
42" MIN.
54" MIN.
LATCH APPROACH, PULL SIDE:
24" MIN.
Y = 48" MIN.
NOTE:
Y = 54" MIN. IF DOOR HAS A CLOSER
HINGE APPROACH, PUSH SIDE:
22" MIN.
Y = 42" MIN.
NOTE:
Y = 48" MIN. IF DOOR HAS BOTH A LATCH AND A CLOSER.
LATCH APPROACH, PUSH SIDE:
Y = 42" MIN.
24" MIN.
NOTE:
Y = 48" MIN. IF DOOR HAS A CLOSER
DOORS IN SERIES:
4'-0"MIN.
4'-0"MIN.
FRONT APPROACH AT SLIDING DOORS:
48" MIN.
POCKET / HINGE APPROACH AT SLIDING DOORS:
22" MIN.
42" MIN.
STOP / LATCH APPROACH AT SLIDING DOORS:
24" MIN.
42" MIN.

ACCESSIBLE - DOOR CLEARANCES

1/4" = 1'-0" 5

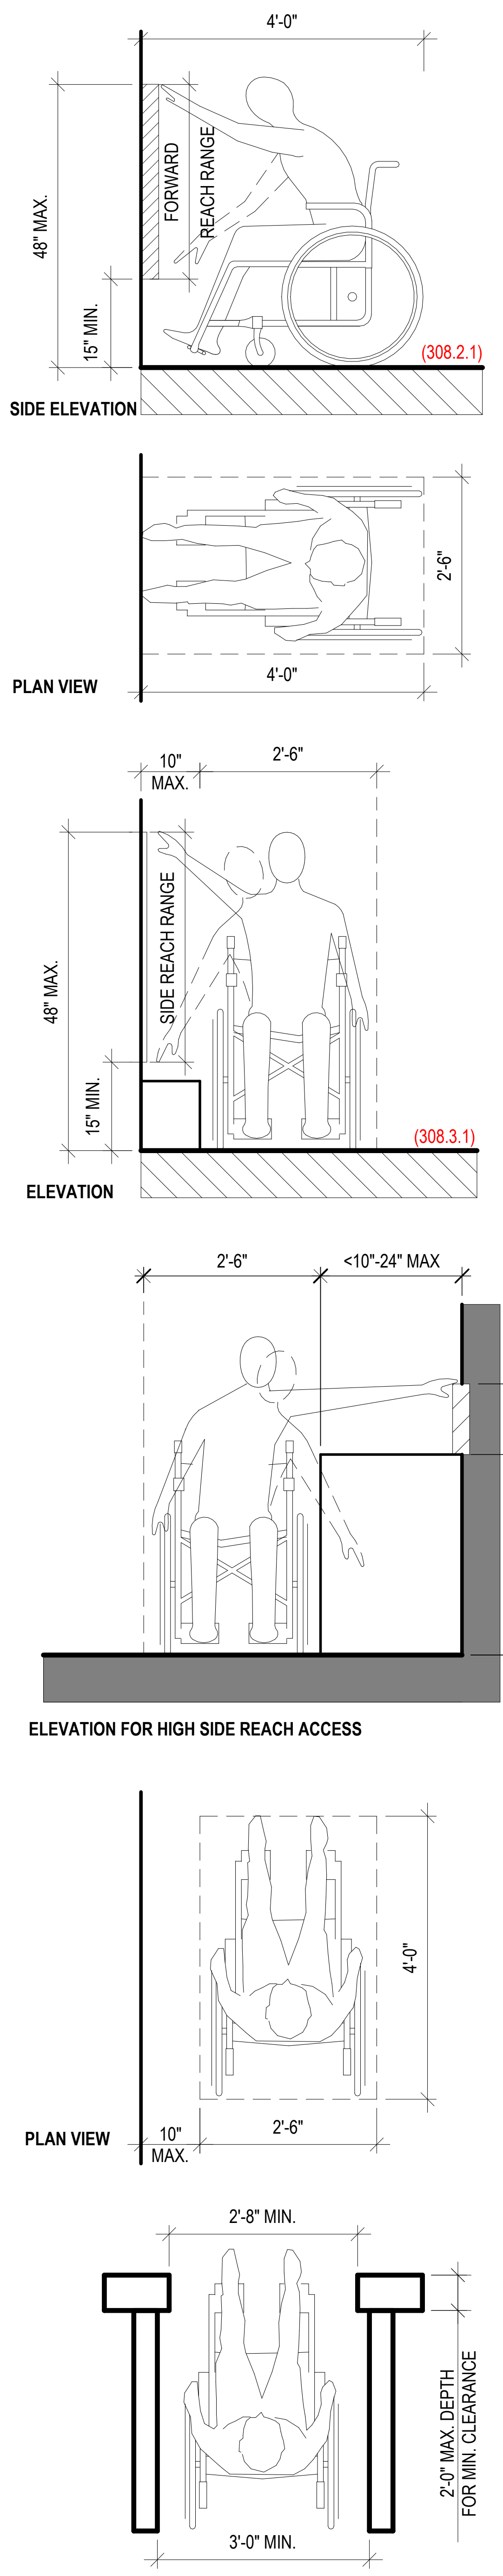
4'-0"
FORWARD REACH RANGE
48" MAX.
15" MIN.
(308.2.1)
SIDE ELEVATION
2'-6"
4'-0"
PLAN VIEW
10" MAX.
2'-6"
SIDE REACH RANGE
48" MAX.
15" MIN.
(308.3.1)
ELEVATION
2'-6"
<10"-24" MAX
34" MAX
46" MAX
ELEVATION FOR HIGH SIDE REACH ACCESS
4'-0"
PLAN VIEW
10" MAX.
2'-6"
2'-8" MIN.
2'-0" MAX. DEPTH FOR MIN. CLEARANCE
3'-0" MIN.

ACCESS. - REACH RANGES

1/2" = 1'-0" 4

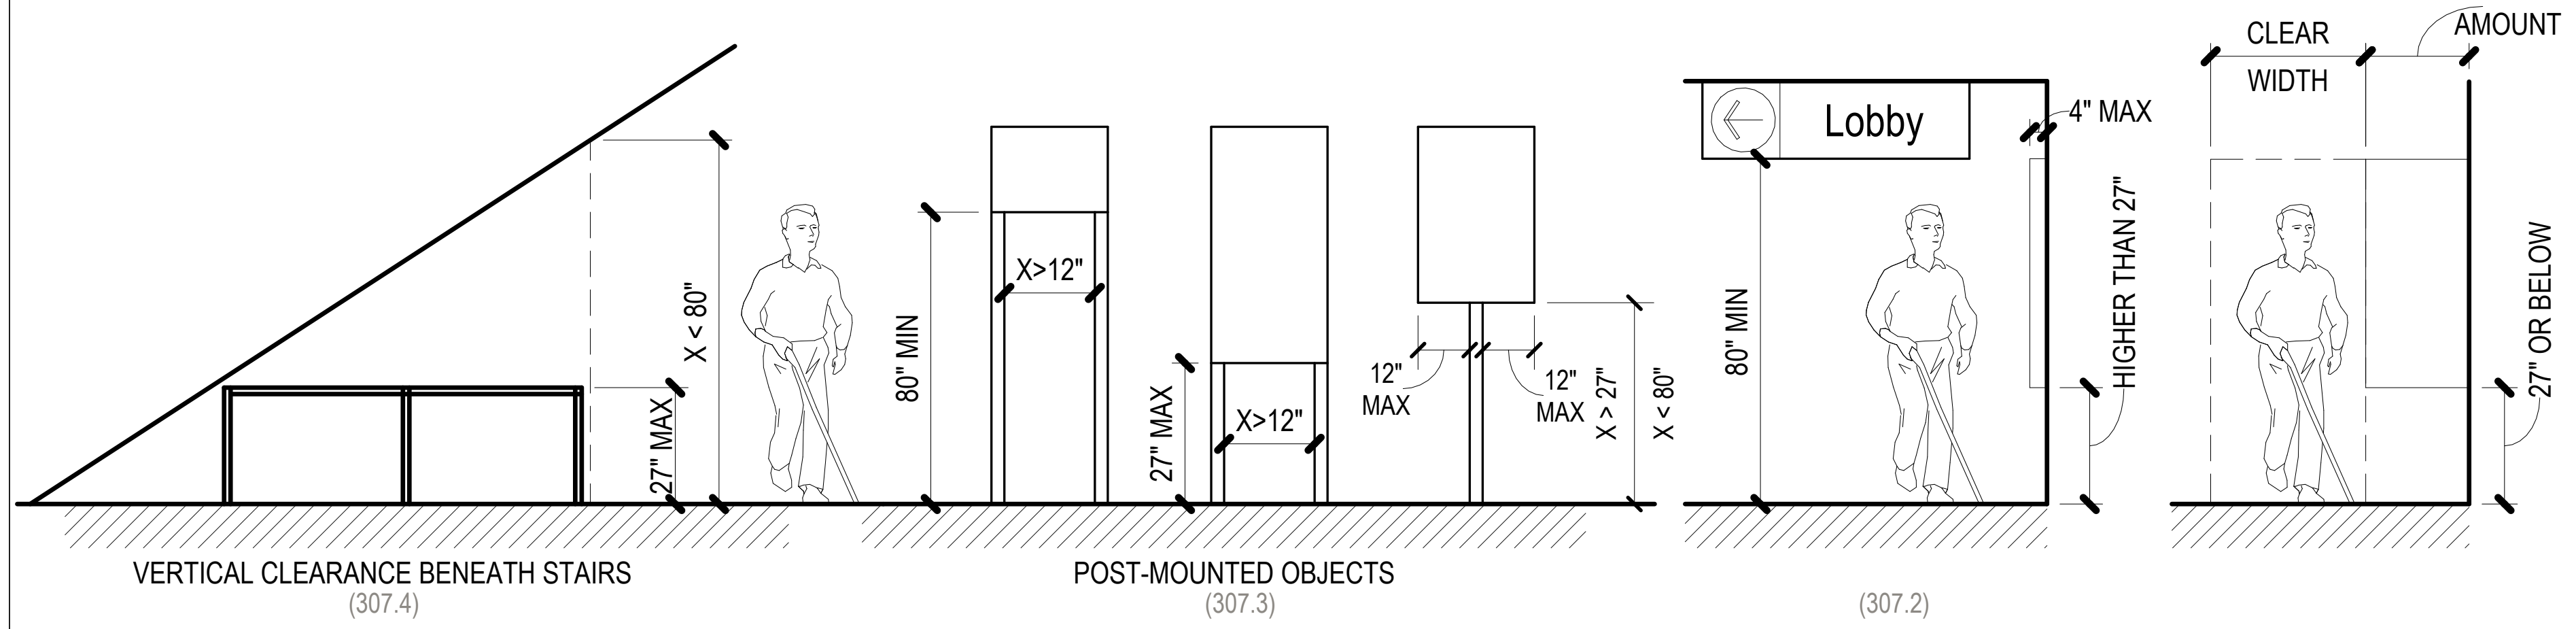
X < 80"
27" MAX
VERTICAL CLEARANCE BENEATH STAIRS
(307.4)
80" MIN
X>12"
27" MAX
X>12"
12" MAX
12" MAX
X > 27"
X < 80"
POST-MOUNTED OBJECTS
(307.3)
Lobby
4" MAX
80" MIN
HIGHER THAN 27"
(307.2)
CLEAR WIDTH
ANY AMOUNT
27" OR BELOW

ACCESSIBLE - PROTRUDING OBJECTS

1/4" = 1'-0" 3

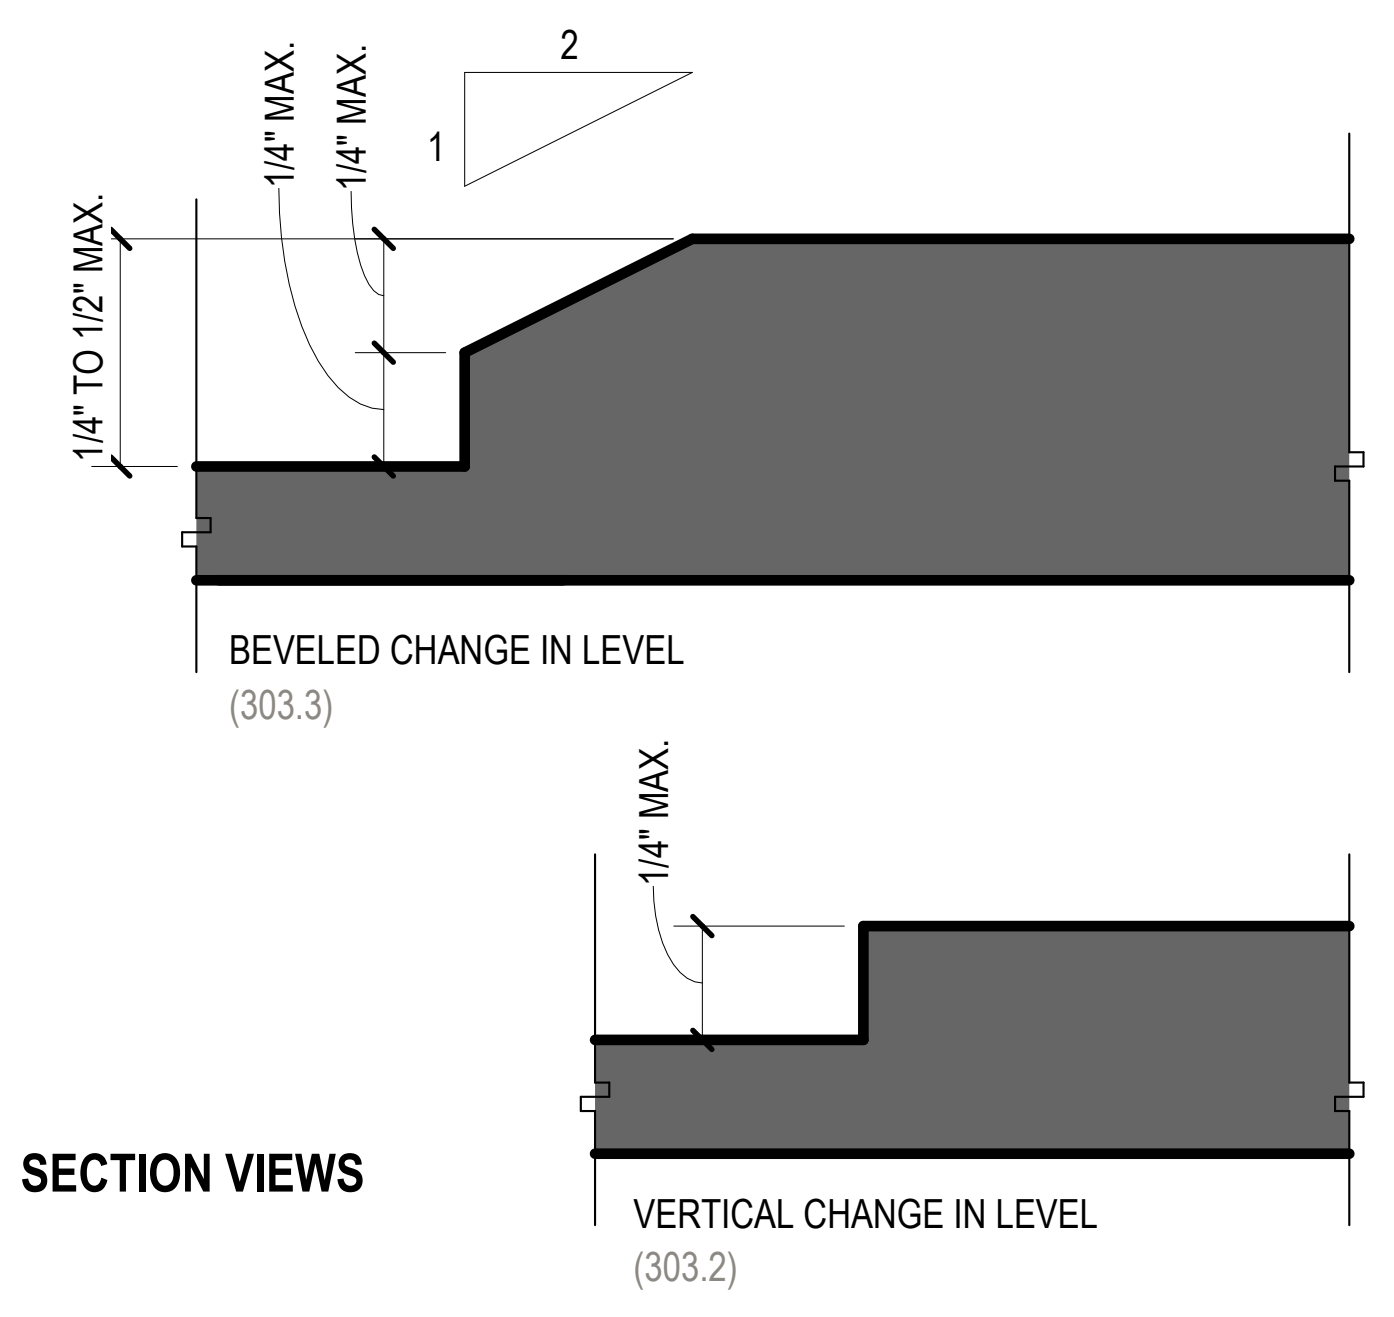
2
1
1/4" MAX.
1/4" MAX.
1/4" TO 1/2" MAX.
BEVELED CHANGE IN LEVEL
(303.3)
1/4" MAX.
SECTION VIEWS
VERTICAL CHANGE IN LEVEL
(303.2)

ACCESSIBLE - THRESHOLD

3/4" = 1'-0" 7

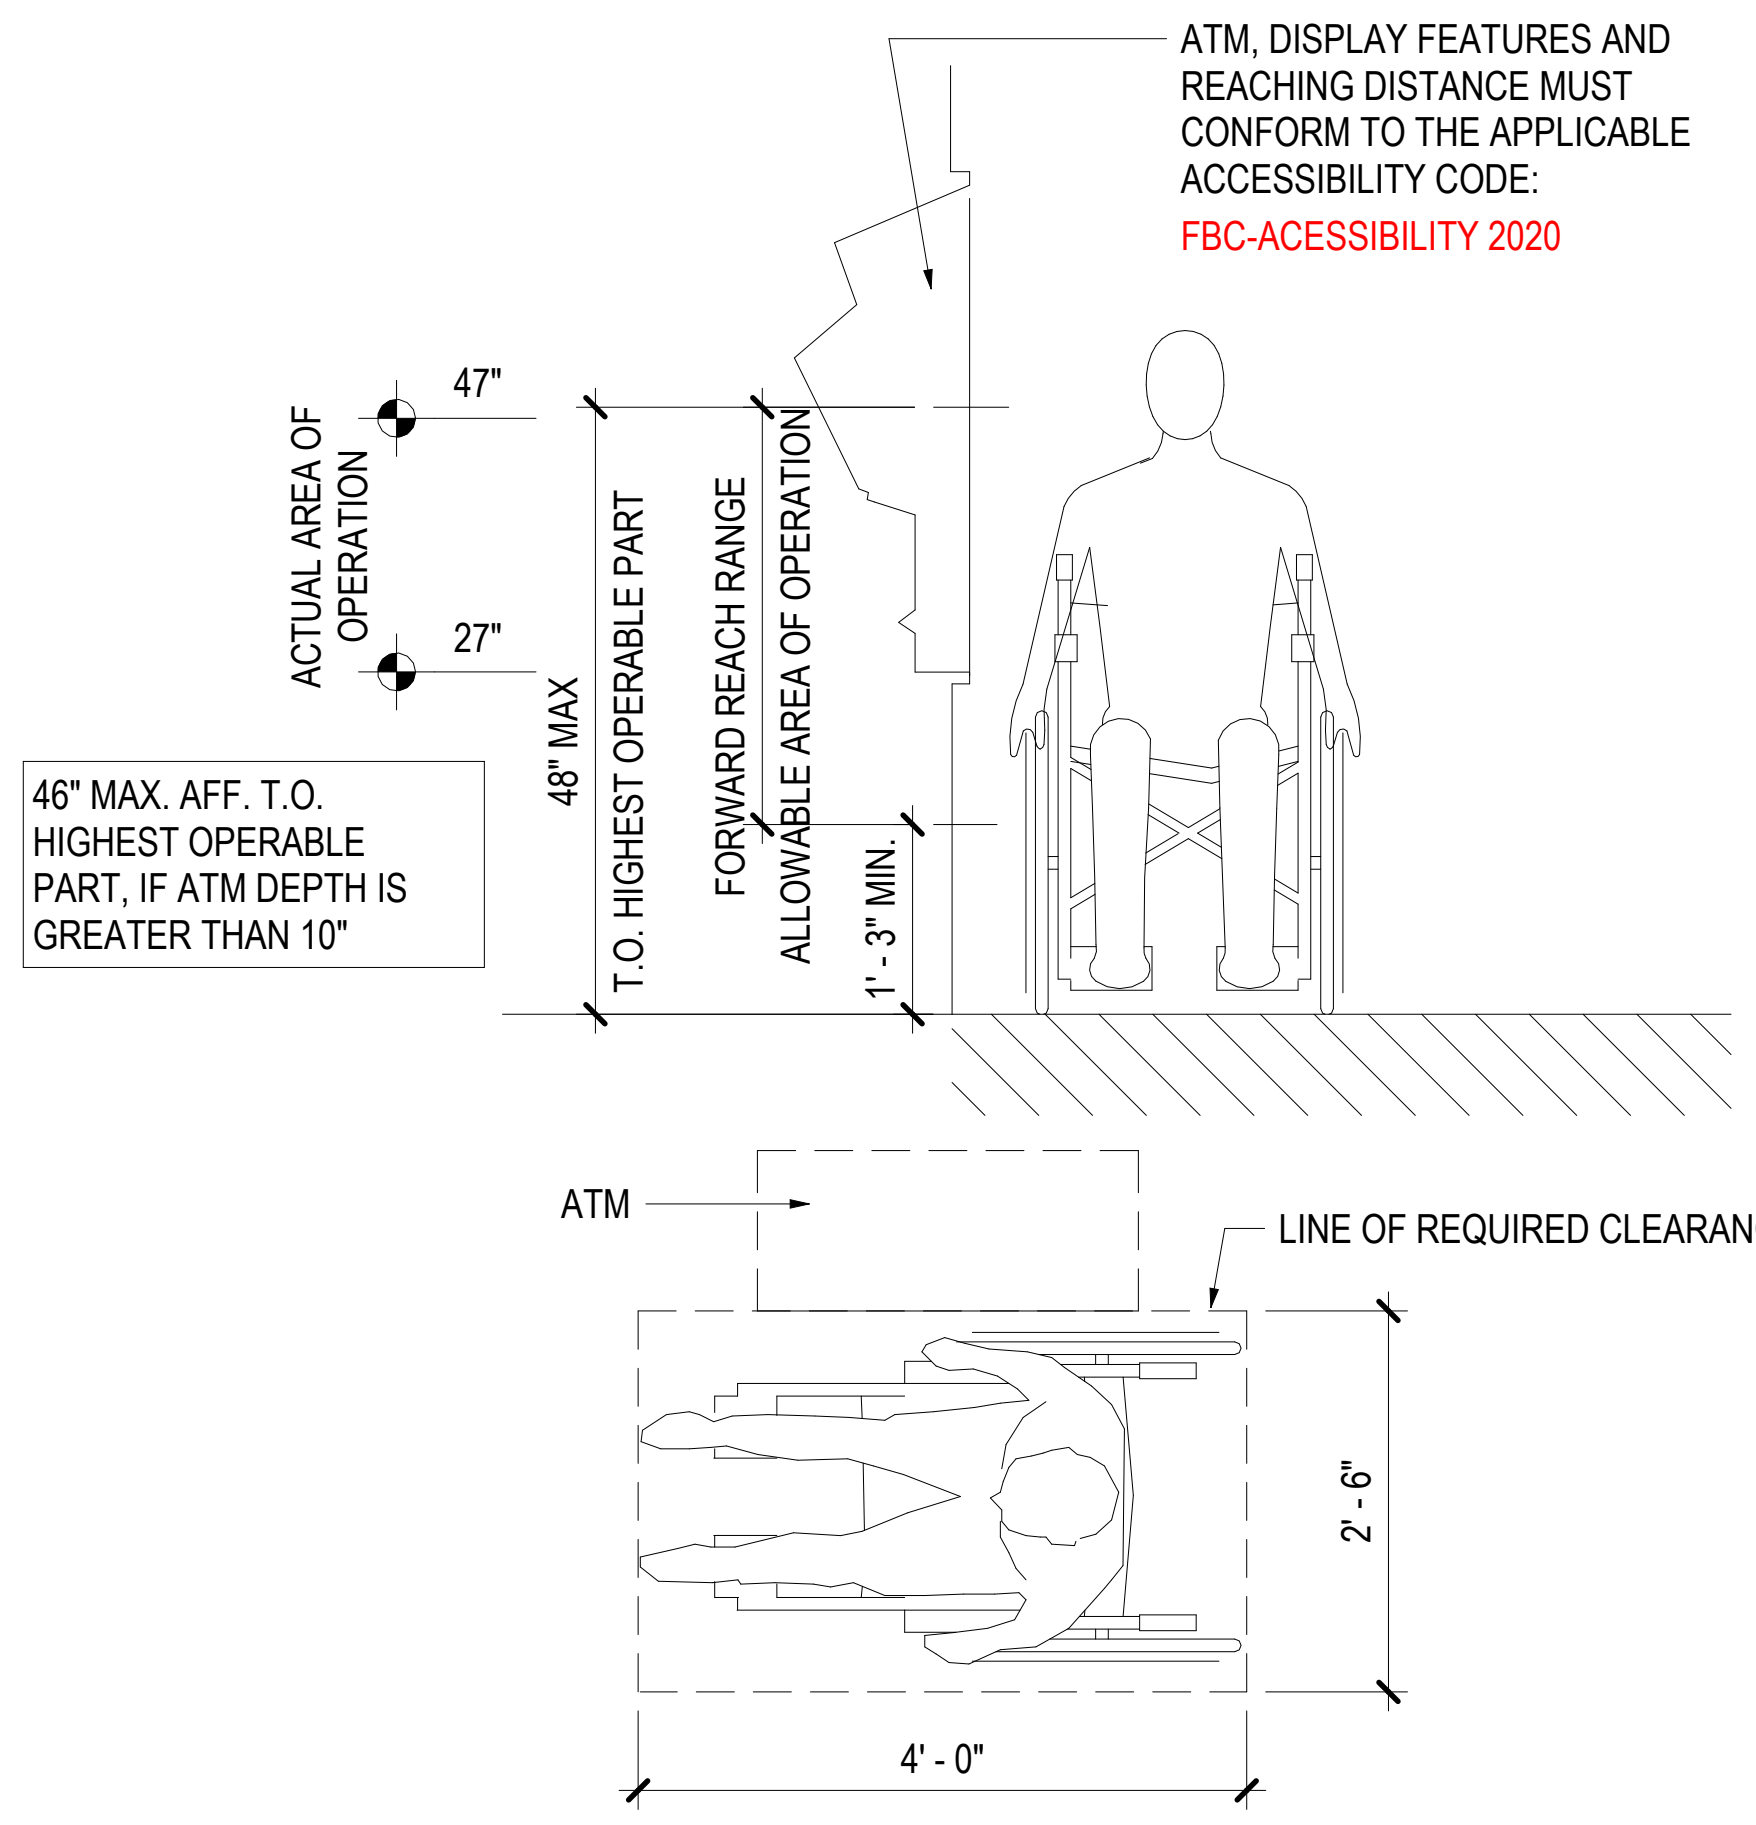
ATM, DISPLAY FEATURES AND REACHING DISTANCE MUST CONFORM TO THE APPLICABLE ACCESSIBILITY CODE:
FBC-ACCESSIBILITY 2020
ACTUAL AREA OF OPERATION
47"
27"
46" MAX. AFF. T.O. HIGHEST OPERABLE PART, IF ATM DEPTH IS GREATER THAN 10"
48" MAX
T.O. HIGHEST OPERABLE PART
FORWARD REACH RANGE
ALLOWABLE AREA OF OPERATION
1'-3" MIN.
ATM
LINE OF REQUIRED CLEARANCE
2'-6"
4'-0"

ATM APPROACH CLEARANCES

1/2" = 1'-0" 6

EXIT SIGNAGE IDENTIFICATION WITH RAISED LETTERS AND BRAILLE. BRAILLE TO MATCH BACKGROUND FINISH. CHARACTERS, SYMBOLS AND THEIR BACKGROUND SHALL HAVE A NON-GLARE FINISH. CHARACTERS AND SYMBOLS SHALL CONTRAST WITH THEIR BACKGROUND EITHER LIGHT ON A DARK BACKGROUND OR DARK ON A LIGHT BACKGROUND

FBC-ACESSIBILITY 2020 - 703.5.1

CHARACTERS SHALL BE SELECTED FROM FONTS WHERE THE WIDTH OF THE UPPERCASE LETTER "O" IS 60 PERCENT MIN AND 110 PERCENT MAX OF THE HEIGHT OF THE UPPERCASE LETTER "I". CHARACTER HEIGHT SHALL BE 5/8 INCH MIN AND 2 INCHES MAX. BASED ON THE HEIGHT OF THE UPPERCASE LETTER "I". STROKE THICKNESS OF THE UPPERCASE LETTER "I" SHALL BE 15 PERCENT MAX OF THE HEIGHT OF THE CHARACTER

FBC-ACESSIBILITY 2020 - 703.5

CHARACTERS ON SIGNS SHALL BE RAISED 1/32" MIN. AND SHALL BE SAN SERIF UPPERCASE CHARACTERS ACCOMPANIED BY GRADE 2. BRAILLE SHALL BE CONTRACTED (GRADE 2) AND SHALL COMPLYING WITH

FBC-ACESSIBILITY 2020 - 703.2

CONTRACTED GRADE 2 BRAILLE SHALL BE USED WHEREVER BRAILLE IS REQUIRED IN OTHER PORTIONS OF THESE STANDARDS. DOTS SHALL HAVE A DOMED OR ROUNDED SHAPE AND SHALL COMPLY WITH

FBC-ACESSIBILITY 2020 - 703.3

VISUAL CHARACTERS SHALL COMPLY WITH SECTION

FBC-ACESSIBILITY 2020 - 703.5.1

WHERE A TACTILE SIGN IS PROVIDED AT A DOOR FOR ROOMS AND SPACES, SIGNS SHALL BE LOCATED ALONGSIDE THE DOOR AT THE LATCH SIDE. WHERE A TACTILE SIGN IS PROVIDED AT DOUBLE DOORS WITH ONE ACTIVE LEAF, THE SIGN SHALL BE LOCATED ON THE INACTIVE LEAF. WHERE A TACTILE SIGN IS PROVIDED AT DOUBLE DOORS WITH TWO ACTIVE LEAFS, THE SIGN SHALL BE LOCATED TO THE RIGHT OF THE RIGHT HAND DOOR. WHERE THERE IS NO WALL SPACE ON THE LATCH SIDE, OR AT THE RIGHT SIDE OF DOUBLE LEAF DOORS, SIGNS SHALL BE LOCATED ON THE NEAREST ADJACENT WALL. SIGNS SHALL BE LOCATED SO THAT A CLEAR FLOOR SPACE OF 18" MIN. x 18" MIN. CENTERED ON THE TACTILE CHARACTER IS PROVIDED BEYOND THE ARC OF ANY DOOR SWING BETWEEN THE CLOSED POSITION AND 45 DEGREES OPEN POSITION

FBC-ACESSIBILITY 2020 - 703.4.1

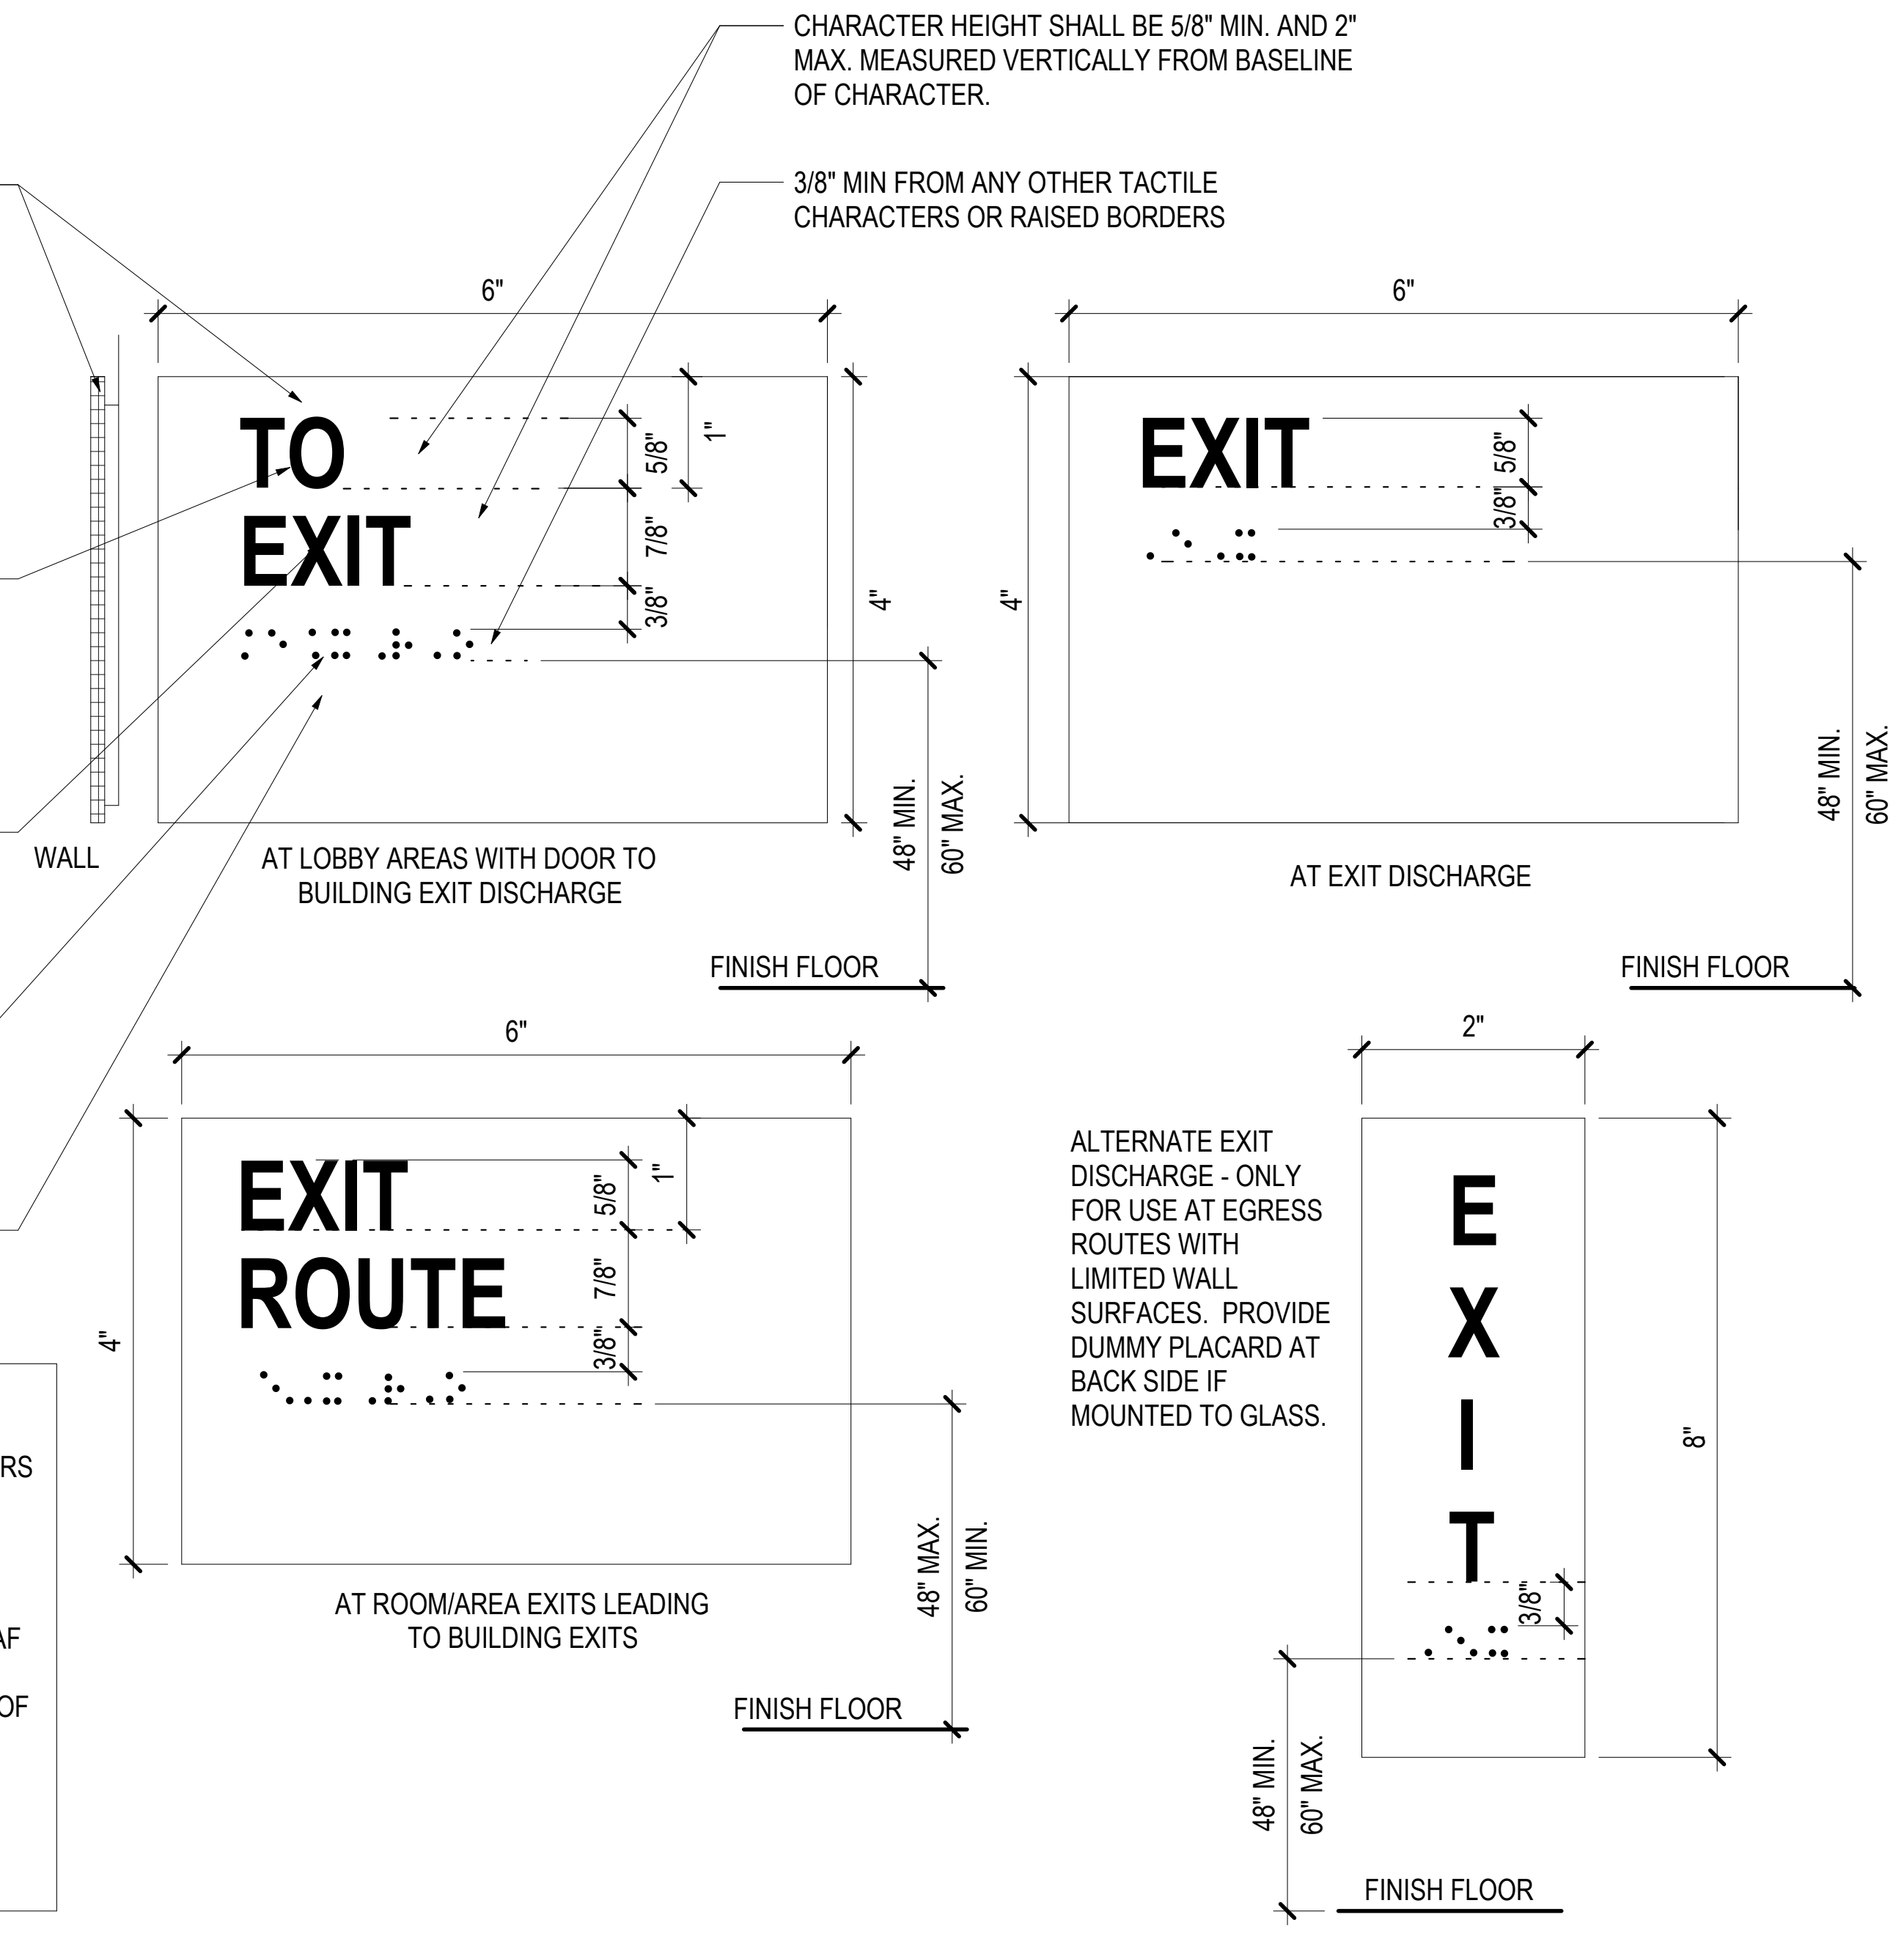
CHARACTER HEIGHT SHALL BE 5/8" MIN. AND 2" MAX. MEASURED VERTICALLY FROM BASELINE OF CHARACTER.
3/8" MIN FROM ANY OTHER TACTILE CHARACTERS OR RAISED BORDERS
6"
TO
EXIT
5/8"
1"
7/8"
3/8"
4"
48" MIN.
60" MAX.
WALL
AT LOBBY AREAS WITH DOOR TO BUILDING EXIT DISCHARGE
FINISH FLOOR
6"
EXIT
5/8"
3/8"
4"
48" MIN.
60" MAX.
AT EXIT DISCHARGE
FINISH FLOOR
6"
EXIT
ROUTE
5/8"
1"
7/8"
3/8"
4"
48" MAX.
60" MIN.
AT ROOM/AREA EXITS LEADING TO BUILDING EXITS
FINISH FLOOR
ALTERNATE EXIT DISCHARGE - ONLY FOR USE AT EGRESS ROUTES WITH LIMITED WALL SURFACES. PROVIDE DUMMY PLACARD AT BACK SIDE IF MOUNTED TO GLASS.
2"
E
X
I
T
3/8"
8"
48" MIN.
60" MAX.
FINISH FLOOR

TACTILE EXIT SIGN

6" = 1'-0" 2

GENERAL NOTES - ACCESSIBILITY

1. THE FLOOR OR LANDING ON EACH SIDE OF AN ENTRANCE OR PASSAGE DOOR SHALL BE LEVEL AND CLEAR. THE LEVEL AND CLEAR AREA SHALL BE AT LEAST 60" LONG IN THE DIRECTION OF THE DOOR SWING AND 48" CLEAR IN THE DIRECTION OPPOSITE THE DOOR SWING MEASURED IN RIGHT ANGLES TO THE PLANE OF THE DOOR IN ITS CLOSED POSITION.
2. IDENTIFY ACCESSIBLE ENTRANCES WITH INTERNATIONAL SYMBOL OF ACCESSIBILITY AND WITH ADDITIONAL DIRECTIONAL SIGNS, AS REQUIRED, VISIBLE FROM APPROACHING PEDESTRIAN WAYS.
3. IN BUILDINGS AND FACILITIES, FLOORS OF A GIVEN STORY SHALL BE A COMMON LEVEL THROUGHOUT, OR SHALL BE CONNECTED BY PEDESTRIAN RAMPS, PASSENGER ELEVATORS OR SPECIAL ACCESS LIFTS.
4. FLOOR SURFACES SHALL BE SLIP-RESISTANT.
5. EVERY CORRIDOR AND AISLE SERVING AN OCCUPANT LOAD OF 10 OR MORE, SHALL NOT BE LESS THAN 44" IN WIDTH.
6. ABRUPT CHANGES IN LEVEL ALONG ANY ACCESSIBLE ROUTE SHALL NOT EXCEED 1/2" IN HEIGHT. LEVEL CHANGES NOT EXCEEDING 1/4" MAY BE VERTICAL. BEVEL OTHERS WITH A SLOPE NOT GREATER THAN 1:2.
7. LATCHING AND LOCKING DOORS THAT ARE HAND ACTIVATED AND WHICH ARE IN A PATH OF TRAVEL SHALL BE OPERABLE WITH A SINGLE EFFORT BY LEVER. TYPE HARDWARE, PANIC BARS, PUSH-PULL ACTIVATING BARS, OR OTHER HARDWARE SHALL BE DESIGNED TO PROVIDE PASSAGE WITHOUT REQUIRING THE ABILITY TO GRASP THE OPENING HARDWARE. MOUNT DOOR OPENING HARDWARE BETWEEN 34" AND 44" A.F.F.
8. CENTER HAND-ACTIVATED DOOR OPENING HARDWARE BETWEEN 34" AND 44" A.F.F.
9. MAXIMUM PULL OR PUSH EFFORT TO OPERATE DOORS SHALL NOT EXCEED 5 POUNDS FOR EXTERIOR DOORS AND 5 POUNDS FOR INTERIOR DOORS, MEASURED AT RIGHT ANGLES TO HINGED DOORS AND AT CENTER PLANE OF SLIDING OR FOLDING DOORS. CORRESPONDING DEVICES OR AUTOMATIC DOOR OPERATORS MAY BE UTILIZED TO MEET THE ABOVE STANDARDS. MAXIMUM EFFORT TO OPERATE REQUIRED FIRE DOORS MAY BE INCREASED BUT SHOULD NOT EXCEED 15 POUNDS.
10. THE BOTTOM 10" OF ALL DOORS (EXCEPT SLIDING) SHALL HAVE A SMOOTH UNINTERRUPTED SURFACE TO ALLOW THE DOOR TO BE OPENED BY A WHEELCHAIR FOOTREST WITHOUT CREATING A TRAP OR HAZARDOUS CONDITION.
11. EVERY REQUIRED ENTRANCE OR PASSAGE DOORWAY SHALL NOT BE LESS THAN 3' IN WIDTH AND NOT LESS THAN 6'-8" IN HEIGHT. DOORS SHALL BE CAPABLE OF OPENING AT LEAST 90 DEGREES AND SHALL BE MOUNTED SO THAT THE CLEAR WIDTH OF THE DOORWAY IS NOT LESS THAN 32".
12. WHERE A PAIR OF DOORS IS UTILIZED, AT LEAST ONE OF THE DOORS SHALL PROVIDE A CLEAR, UNOBSTRUCTED OPENING WIDTH OF 32". CLEAR OPENINGS OF DOORWAYS WITH SWINGING DOORS SHALL BE MEASURED BETWEEN THE FACE OF THE DOOR AND THE STOP, WITH THE DOOR OPEN 90 DEGREES. OPENINGS MORE THAN 24 INCHES DEEP SHALL PROVIDE A CLEAR OPENING OF 36 INCHES MINIMUM. THERE SHALL BE NO PROJECTIONS INTO THE REQUIRED CLEAR OPENING WIDTH LOWER THAN 34 INCHES ABOVE THE FINISH FLOOR OR GROUND. PROJECTIONS INTO THE CLEAR OPENING WIDTH BETWEEN 34 INCHES AND 80 INCHES ABOVE THE FINISH FLOOR OR GROUND SHALL NOT EXCEED 4 INCHES.
13. TO ALERT THE VISUALLY IMPAIRED, MARK THE UPPER APPROACH AND THE LOWER TREAD OF EACH INTERIOR STAIR WITH A STRIP OF CLEARLY CONTRASTING COLOR AT LEAST 2" WIDE PLACED PARALLEL TO AND NOT MORE THAN 1" FROM THE NOSE OF THE STEP OR LANDING. THE STRIP SHALL BE OF A MATERIAL THAT IS AT LEAST AS SLIP RESISTANT AS THE OTHER TREADS OF THE STAIR.
14. ELECTRICAL RECEPTACLE OUTLETS ON BRANCH CIRCUITS OF 30 AMPERES OR LESS AND COMMUNICATION SYSTEM RECEPTACLES SHALL BE MOUNTED 15" MIN. A.F.F. TO THE BOTTOM OF THE BOX AND 48" MAX. A.F.F. TO THE TOP OF THE BOX.
15. FLOORS AND LANDINGS SHALL NOT BE MORE THAN 1/2" LOWER THAN THE THRESHOLD OF THE DOORWAY. CHANGE IN LEVEL BETWEEN 1/4" AND 1/2" SHALL BE BEVELED WITH A SLOPE NO GREATER THAN 1:2.
16. MINIMUM MANEUVERING CLEARANCES AT DOORS AND GATES SHALL EXTEND THE FULL WIDTH OF THE DOORWAY AND THE REQUIRED LATCH SIDE OR HINGE SIDE CLEARANCE.
17. HANDLES, PULLS, LATCHES, LOCKS, AND OTHER OPERABLE PARTS ON DOORS AND GATES SHALL COMPLY AS FOLLOWS. OPERABLE PARTS OF SUCH HARDWARE SHALL BE 34 INCHES MINIMUM AND 44 INCHES MAXIMUM ABOVE THE FINISH FLOOR OR GROUND. WHERE SLIDING DOORS ARE IN THE FULLY OPEN POSITION, OPERATING HARDWARE SHALL BE EXPOSED AND USABLE FROM BOTH SIDES.
18. THE DISTANCE BETWEEN TWO HINGED OR PIVOTED DOORS IN SERIES AND GATES IN SERIES SHALL BE A MINIMUM OF 48" PLUS THE WIDTH OF THE DOORS OR GATES SWINGING INTO THE SPACE.
19. A KEY-OPERATED LOCKING DEVICE IS PERMITTED FROM THE EGRESS SIDE PROVIDED THAT THE LOCKING DEVICE IS READILY DISTINGUISHABLE AS LOCKED; A READILY VISIBLE DURABLE SIGN IS POSTED ON THE EGRESS SIDE ON OR ADJACENT TO THE DOOR STATING "THIS DOOR TO REMAIN UNLOCKED WHEN THIS SPACE IS OCCUPIED". THE SIGN SHALL BE IN LETTERS 1" HIGH ON A CONTRASTING BACKGROUND.

20 ALL CONTROLS FOR USE BY CUSTOMERS MUST BE MOUNTED BETWEEN 15" AND 48" ABOVE FINISHED FLOOR AND MUST HAVE 30" X 48" MINIMUM CLEAR FLOOR SPACE FOR A FORWARD OR PARALLEL APPROACH. CONTROLS MOUNTED OVER AN OBSTRUCTION THAT IS BETWEEN 10" AND 24" DEEP MAY BE NO HIGHER THAN 46" AFF. IF A PARALLEL APPROACH IS PROVIDED; OR WHERE OBSTRUCTIONS ARE BETWEEN 20" AND 25" DEEP WITH A FORWARD APPROACH. CONTROLS MUST NOT REQUIRE TIGHT GRASPING OR TWISTING OF THE WRIST.

21 COMMON EMPLOYEE AREAS SUCH AS BREAK ROOMS, LOCKERS, AND TOILET ROOMS MUST BE ACCESSIBLE AND HAVE ACCESSIBLE FEATURES AND FIXTURES. EMPLOYEE WORK AREAS LESS THAN 1,000 SF AS DEFINED BY PERMANENTLY INSTALLED PARTITIONS, COUNTERS, CASEWORK OR FURNISHINGS ARE NOT REQUIRED TO HAVE AN ACCESSIBLE PATH OF CIRCULATION THROUGHOUT THE SPACE BUT ARE REQUIRED TO BE CONSTRUCTED SO AN INDIVIDUAL CAN APPROACH, ENTER AND EXIST THE SPACE.

22 IN COMMON SPACES WITHIN EMPLOYEE AREAS, AT LEAST ONE OF EACH TYPE OF STORAGE OR WORK COUNTER, 5% OF LOCKERS AND CONTROLS (EMERGENCY PHONES, CARD READERS ETC.) MUST BE ON AN ACCESSIBLE ROUTE, WITHIN REACH RANGE AND MUST COMPLY WITH STANDARDS OR LOCALS CODES, WHICHEVER IS STRICTER.

23 FIRE ALARM SYSTEM SHALL HAVE PERMANENTLY INSTALLED AUDIBLE AND VISIBLE ALARMS COMPLYING WITH NFPA (1999 OR 2010 EDITION) AND AS REQUIRED BY LOCAL AUTHORITIES. ALARMS MUST BE LOCATED IN PUBLIC AND COMMON USE AREAS. WHERE EMPLOYEES HAVE AUDIBLE ALARMS, THE WIRING SHALL BE DESIGNATED SO VISIBLE ALARMS CAN BE INTEGRATED INTO THE SYSTEM, UNLESS GREATER STANDARDS ARE REQUIRED BY LOCAL AUTHORITIES.

24 OPERABLE PORTION OF CARD READER TO BE MOUNTED AT 48" OR BELOW WITH CLEAR FLOOR SPACE FOR FRONT OR PARALLEL APPROACH.

25 ALL SIGNS IDENTIFYING PERMANENT ROOMS OR SPACES ARE REQUIRED TO HAVE VISUAL AND RAISED CHARACTERS AND BRAILLE. SIGNAGE TO BE MOUNTED ON LATCH SIDE OF DOOR WITH THE BOTTOM OF THE BRAILLE NO LOWER THAN 48" AND THE BOTTOM OF THE HIGHEST TACTILE CHARACTER NO HIGHER THAN 60" AFF.

26 IN PUBLIC AREAS PROVIDED WITH WORK SURFACES ARE COUNTERS INTENDED FOR DINNING/DRINKING, AT LEAST 5% OF THE TABLES MUST BE ACCESSIBLE WITH COMPLIANT KNEE AND TOE CLEARANCE AN ACCESSIBLE ROUTE AND DISTRIBUTED THROUGHOUT THE SPACE.

27 ALL EQUIPMENT, FURNITURE AND MILLWORK INTENDED FOR CUSTOMER USE MUST MEET ALL CLEARANCES AND REACH RANGES AS DEFINED BY GOVERNING ACCESSIBILITY CODE OR LOCAL CODE; WHICHEVER IS STRICTER.

28 PROVIDE ACCESSIBLE FLOOR TRANSITIONS AT ALL LOCATIONS WHERE THERE IS A CHANGE IN FLOORING MATERIAL OR AT DOOR THRESHOLDS. THE CHANGE OF LEVEL BETWEEN MATERIALS MUST BE NO MORE THAN 1/4" OR UP TO 1/2" IF SLOPED NO MORE THAN 1:2.

29 ALL DATA AND POWER RECEPTACLES INTENDED FOR CUSTOMER ACCESS/ USE MUST BE INSTALLED WITHIN ACCESSIBLE REACH RANGES - SEE PLAN GENERAL NOTE 1.

30 WALL MOUNTED EQUIPMENT, FIXTURES, LIGHTING, ETC. BETWEEN 27" AND 80" AFF. SHALL NOT PROTRUDE MORE THAN 4" FROM THE WALL PER ACCESSIBILITY REQUIREMENTS.

31 ALL EQUIPMENT (INCLUDING COFFEE MACHINES, ATM MACHINES, ETC.), FURNITURE, AND MILLWORK INTENDED FOR CUSTOMER USE MUST BE ON AN ACCESSIBLE ROUTE AND MUST MEET ACCESSIBILITY STANDARDS FOR CLEAR FLOOR SPACE, REACH RANGE, OPERATING PARTS, AND KNEE AND TOE SPACE AS DEFINED BY ACCESSIBILITY REQUIREMENTS OR APPLICABLE LOCAL CODES, WHICHEVER IS STRICTER.

32 ALL EQUIPMENT INTENDED FOR CUSTOMER USE MUST BE PLACED SO THAT CONTROLS REQUIRED FOR USE ARE WITHIN ACCESSIBLE REACH RANGE. OWNER MUST VERIFY THAT ALL EQUIPMENT MEETS THESE REQUIREMENTS PRIOR TO INSTALLATION.

GENERAL NOTES - SIGNAGE

1.5/8" HIGH BY 1/32" RAISED LETTERING (UNLESS NOTED OTHERWISE)
2. GRADE 2 BRAILLE POSITIONED DIRECTLY BELOW TEXT, AND SHALL BE SEPARATED 3/8" MIN FROM ANY OTHER TACTILE CHARACTERS AND 3/8" MIN FROM RAISED BORDERS.
3.1/32" RAISED PICTOGRAM WITH 70% CONTRASTING BETWEEN BACKGROUND AND TEXT. FINISH TO BE EGGSHELL
4. COLOR TO BE BLUE BACKGROUND WITH WHITE LETTERS
5. SEE ELEVATION FOR MOUNTING INFORMATION

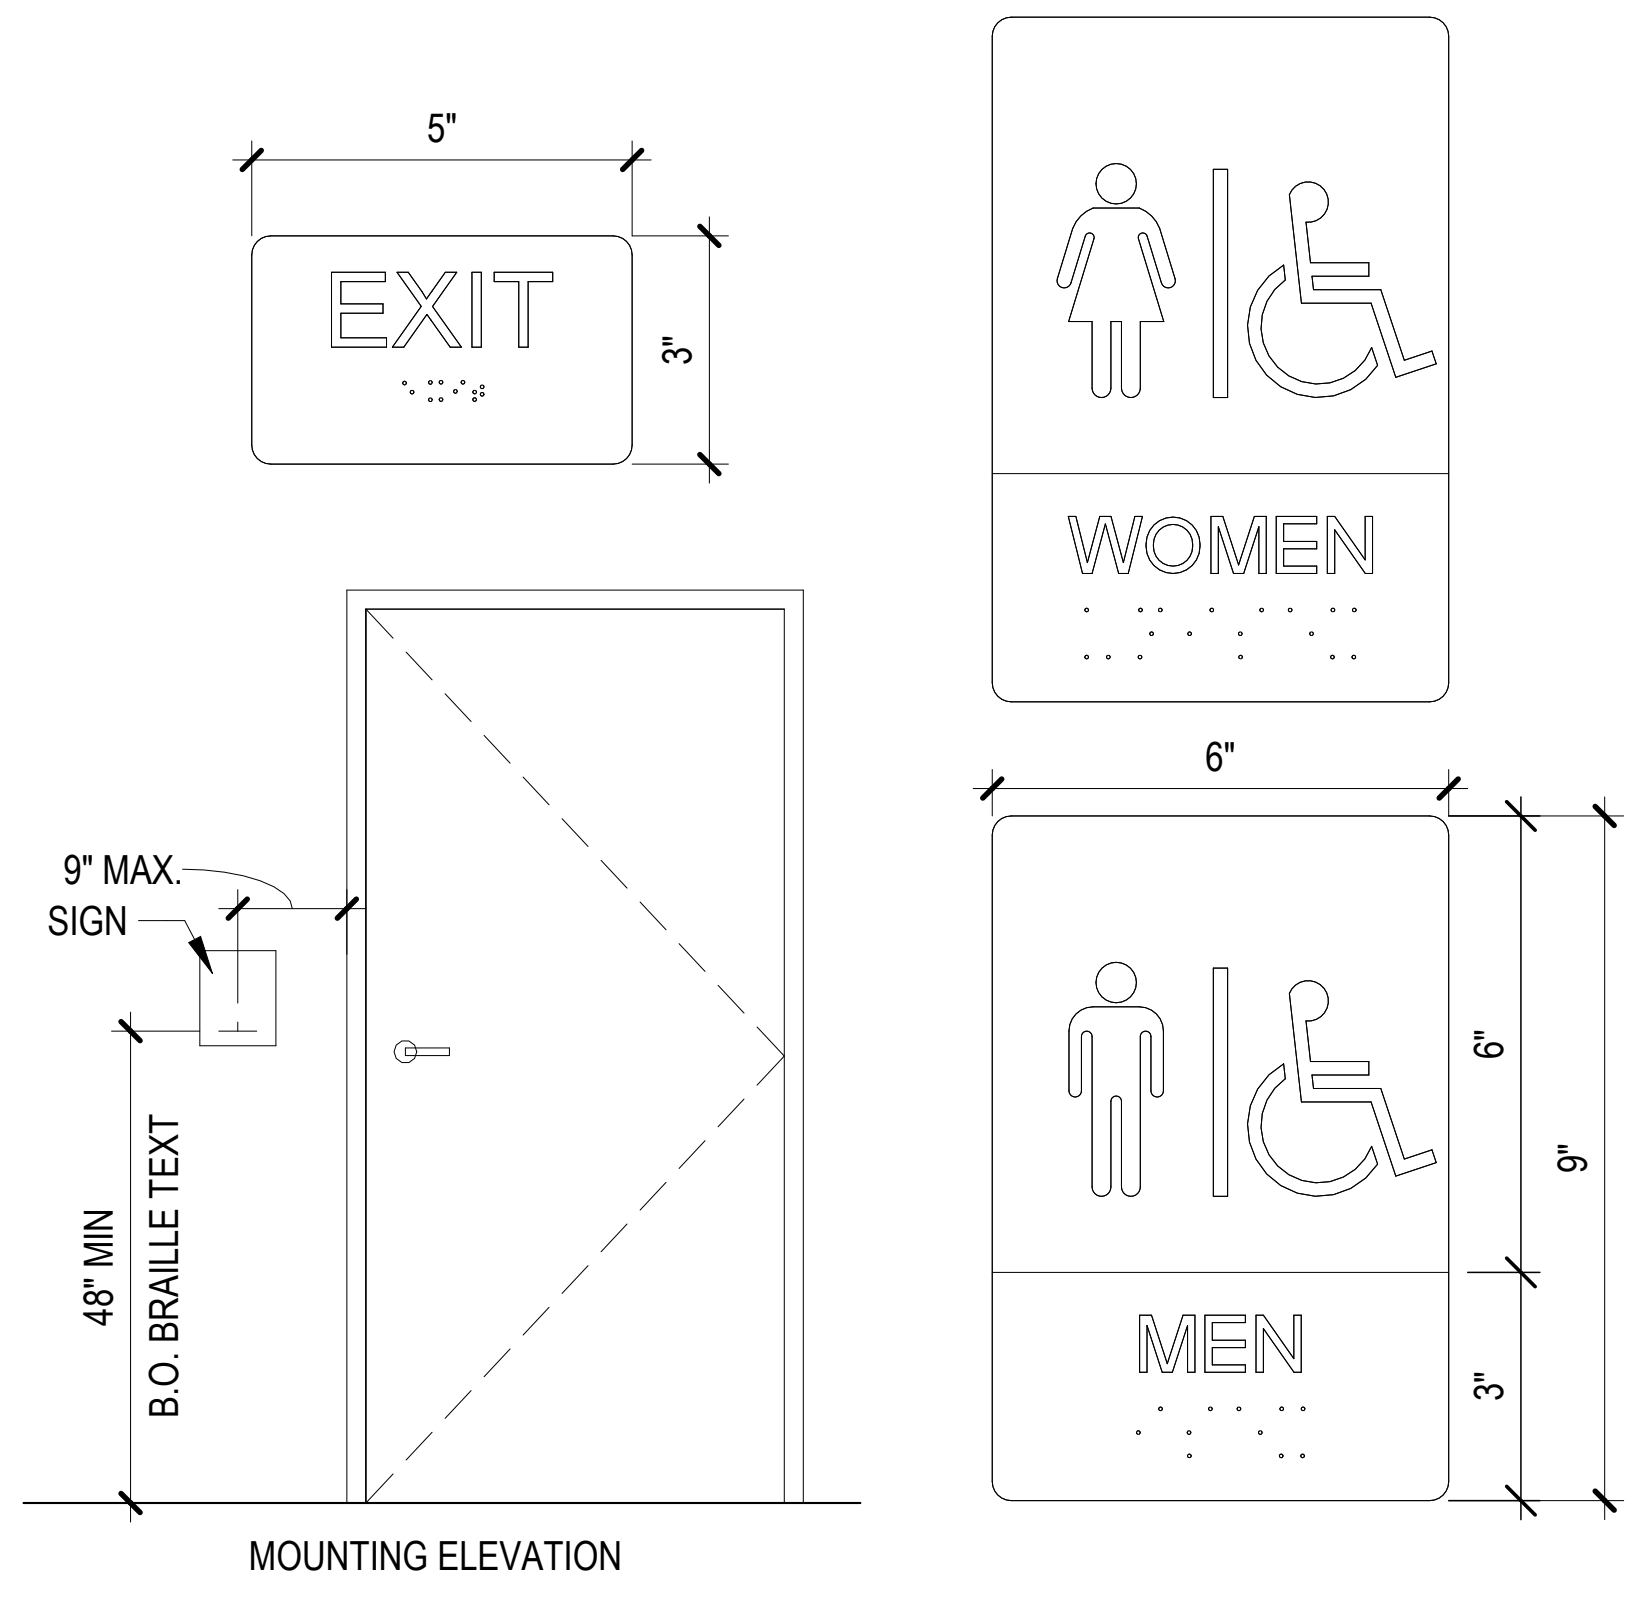
5"
EXIT
3"
WOMEN
9" MAX.
SIGN
48" MIN
B.O. BRAILLE TEXT
MOUNTING ELEVATION
6"
MEN
6"
9"
3"

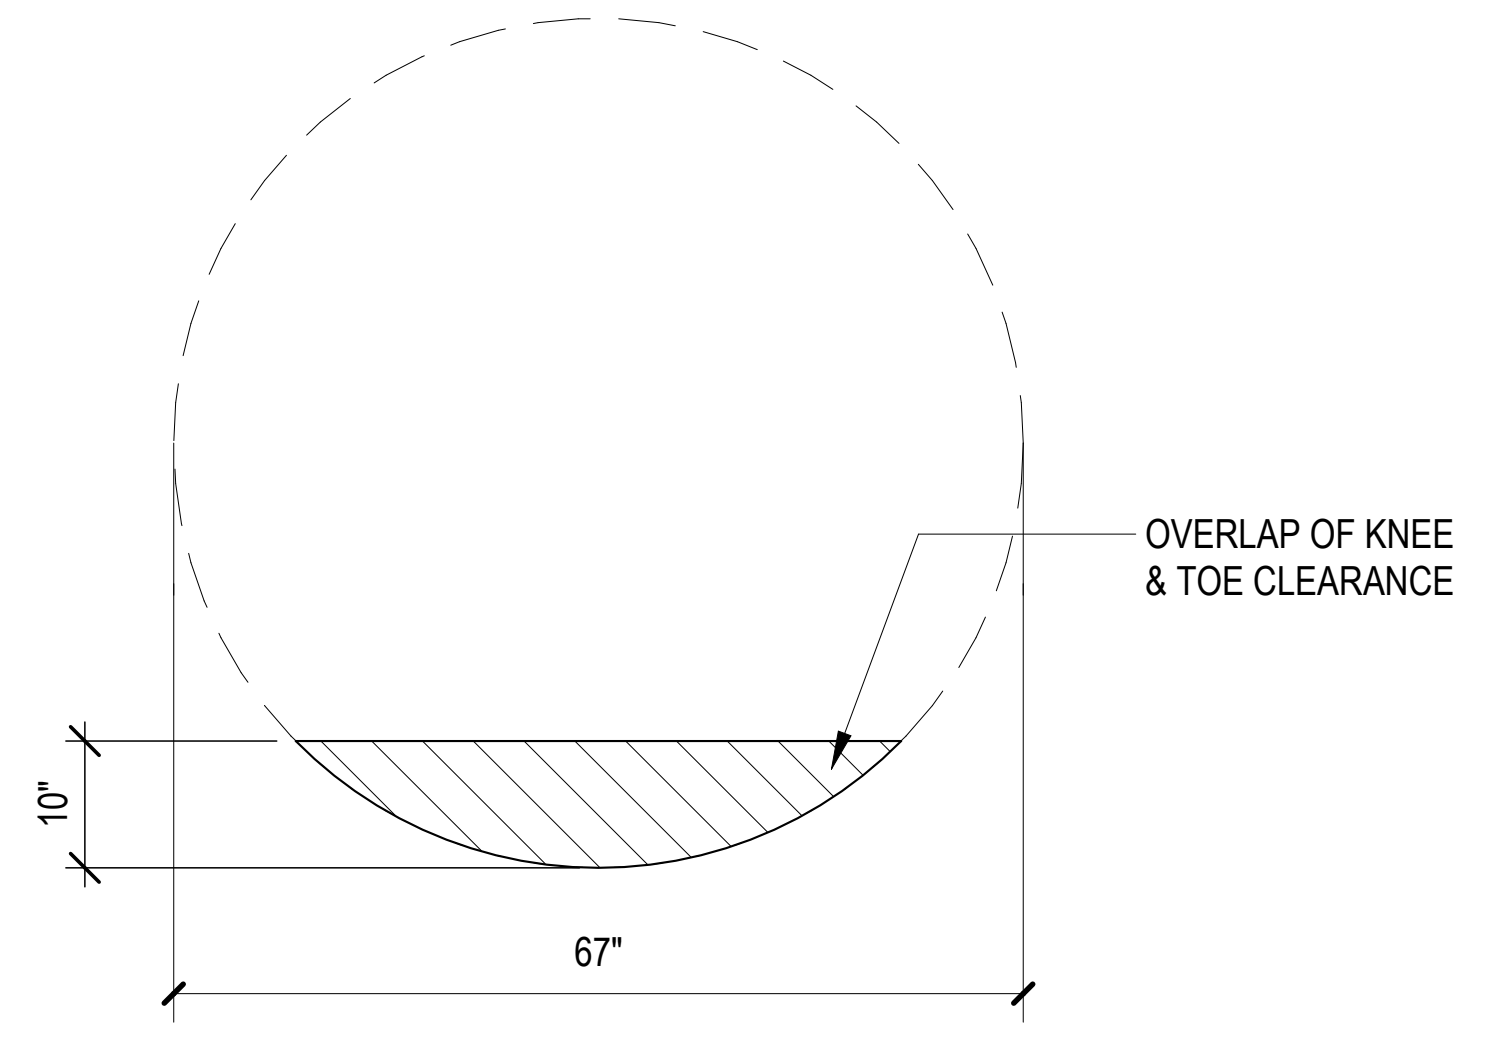
OVERLAP OF KNEE & TOE CLEARANCE
10"
67"

ADA TURNING CLEARANCE

1/2" = 1'-0" 1

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303

404-875-4500 tel
www.praxis3.com

STUART M. ROMM
07/02/26
CERTIFICATE NO. 3452

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:

FIFTH THIRD BANK

Project Number: 26302
Project Name:

WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:

ACCESSIBILITY NOTES

Sheet Number:

G-002

7/8/2026 2:37:36 PM

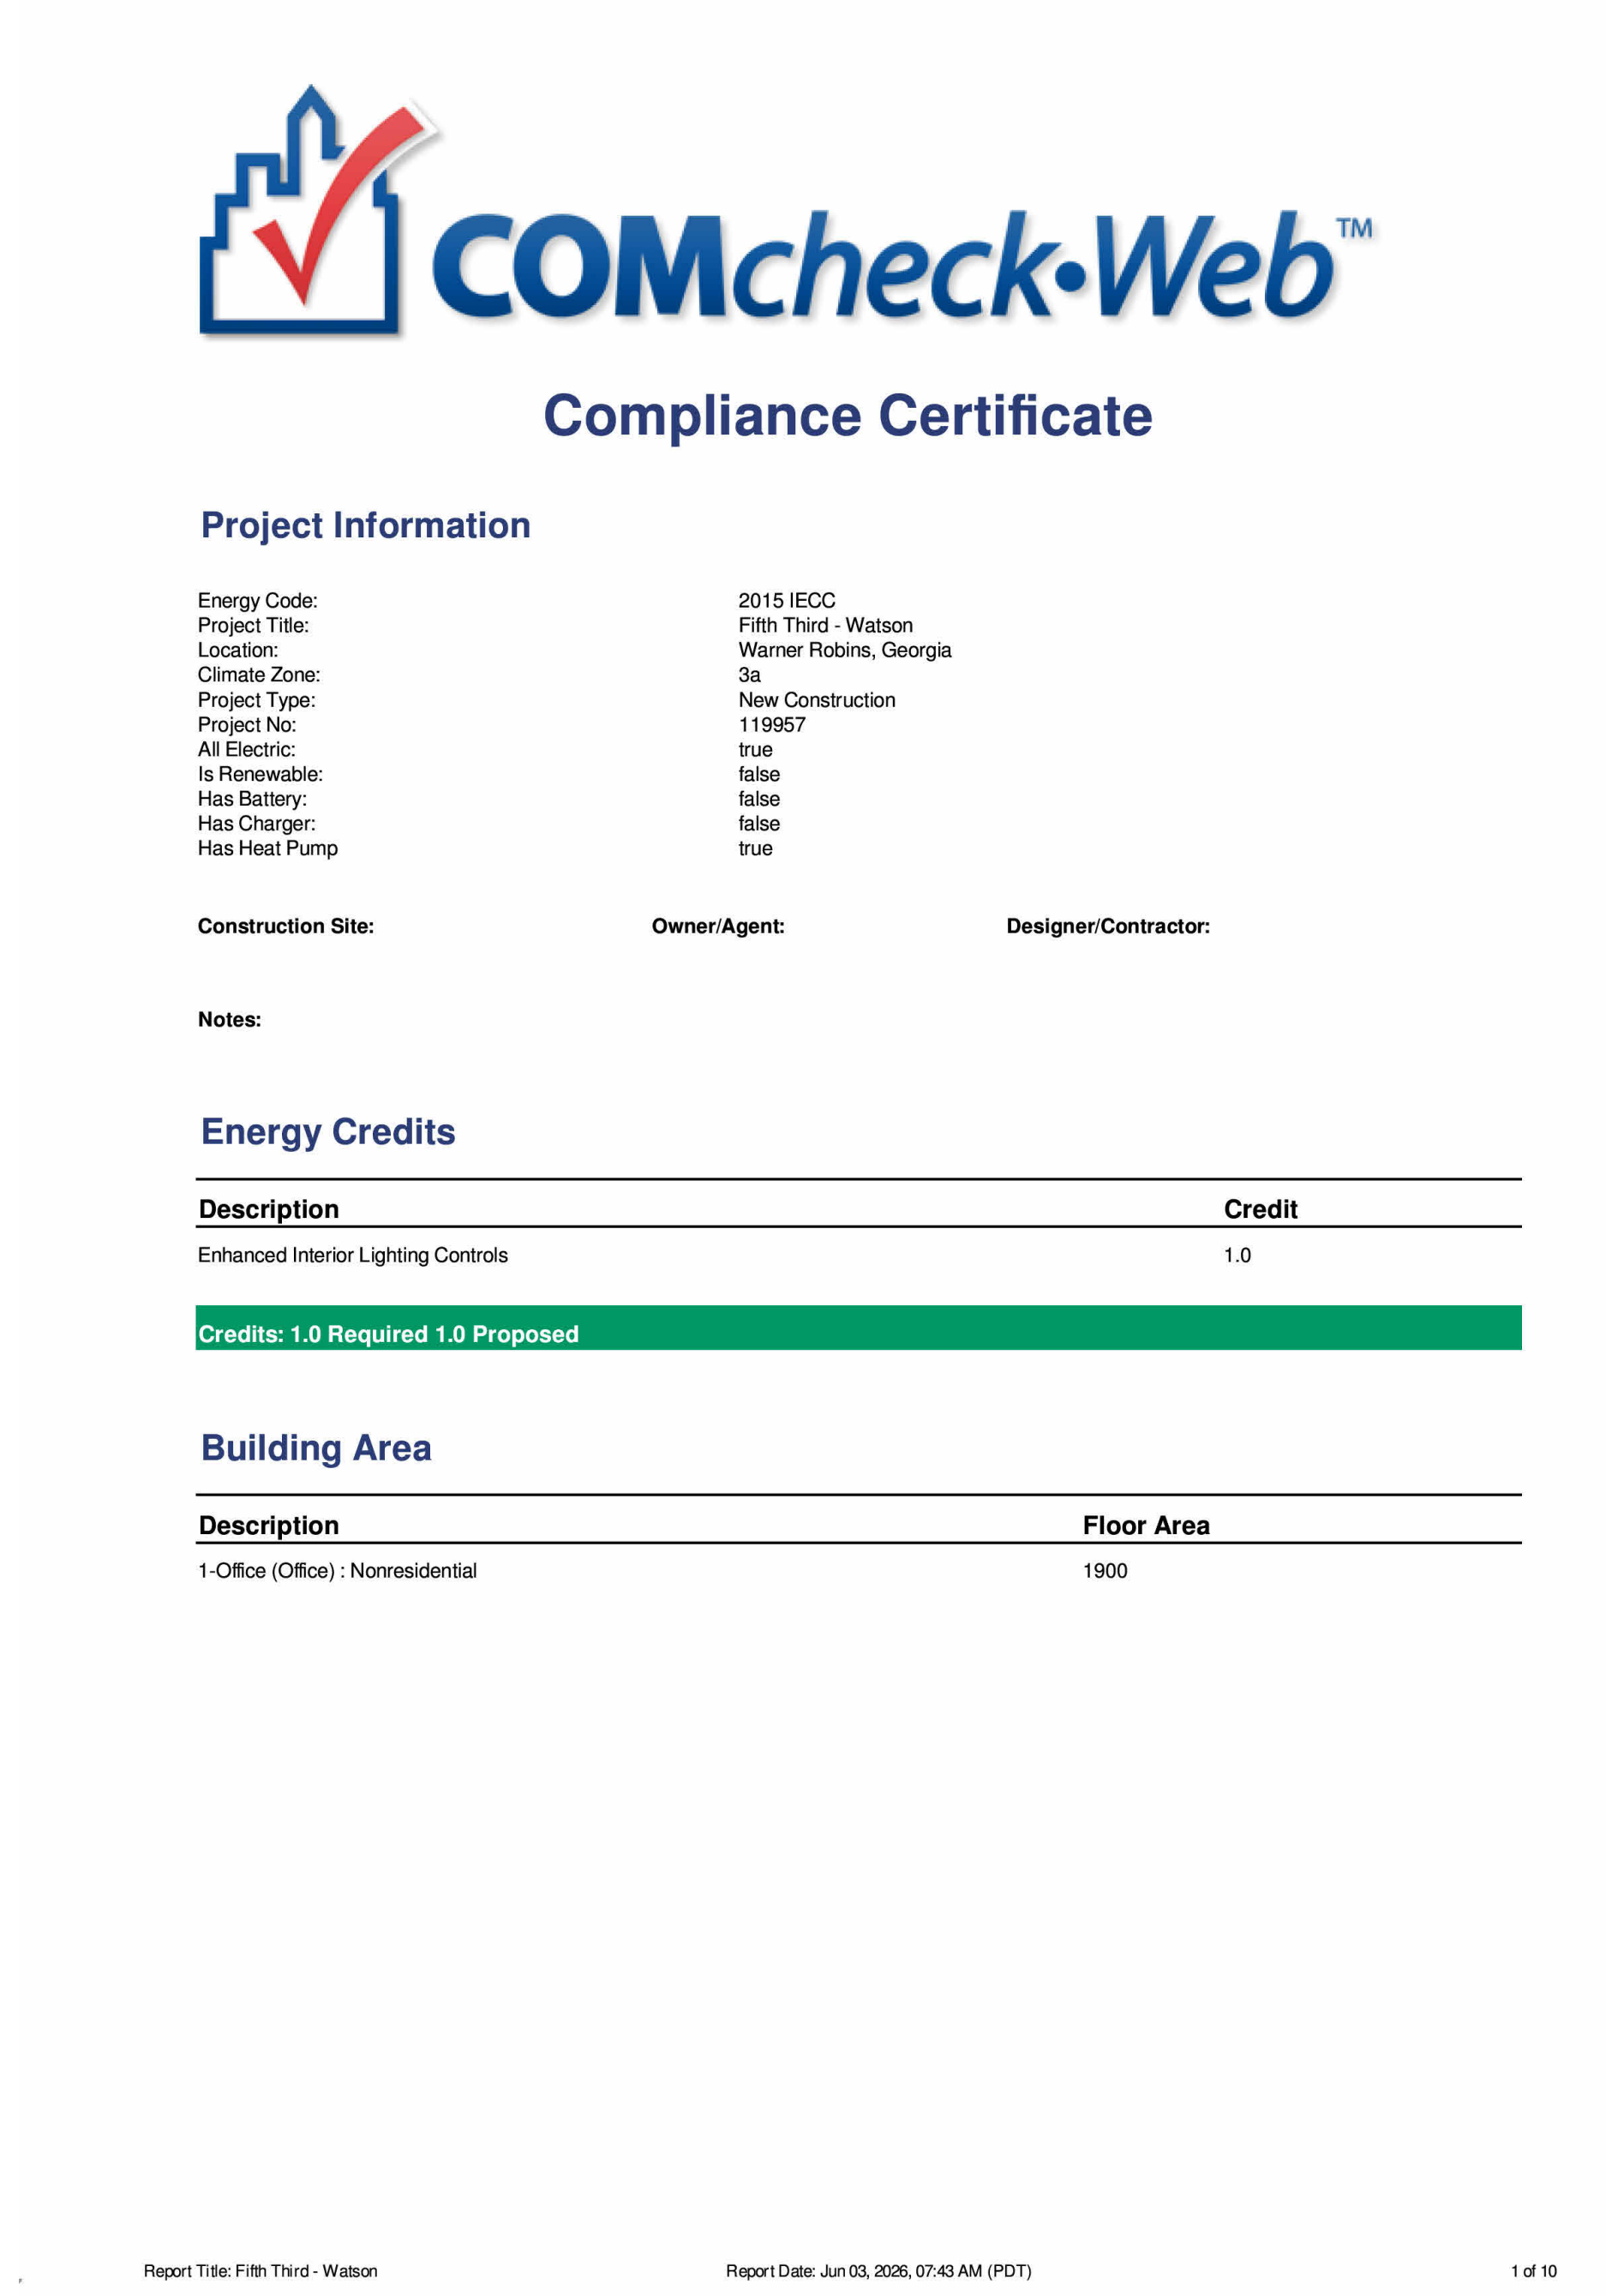

COMcheck-Web™

Compliance Certificate

Project Information

Energy Code:	2015 IECC
Project Title:	Fifth Third - Watson
Location:	Warner Robins, Georgia
Climate Zone:	3a
Project Type:	New Construction
Project No:	119957
All Electric:	true
Is Renewable:	false
Has Battery:	false
Has Charger:	false
Has Heat Pump	true

Construction Site: **Owner/Agent:** **Designer/Contractor:**

Notes:

Energy Credits

Description	Credit
Enhanced Interior Lighting Controls	1.0

Credits: 1.0 Required 1.0 Proposed

Building Area

Description	Floor Area
1-Office (Office) : Nonresidential	1900

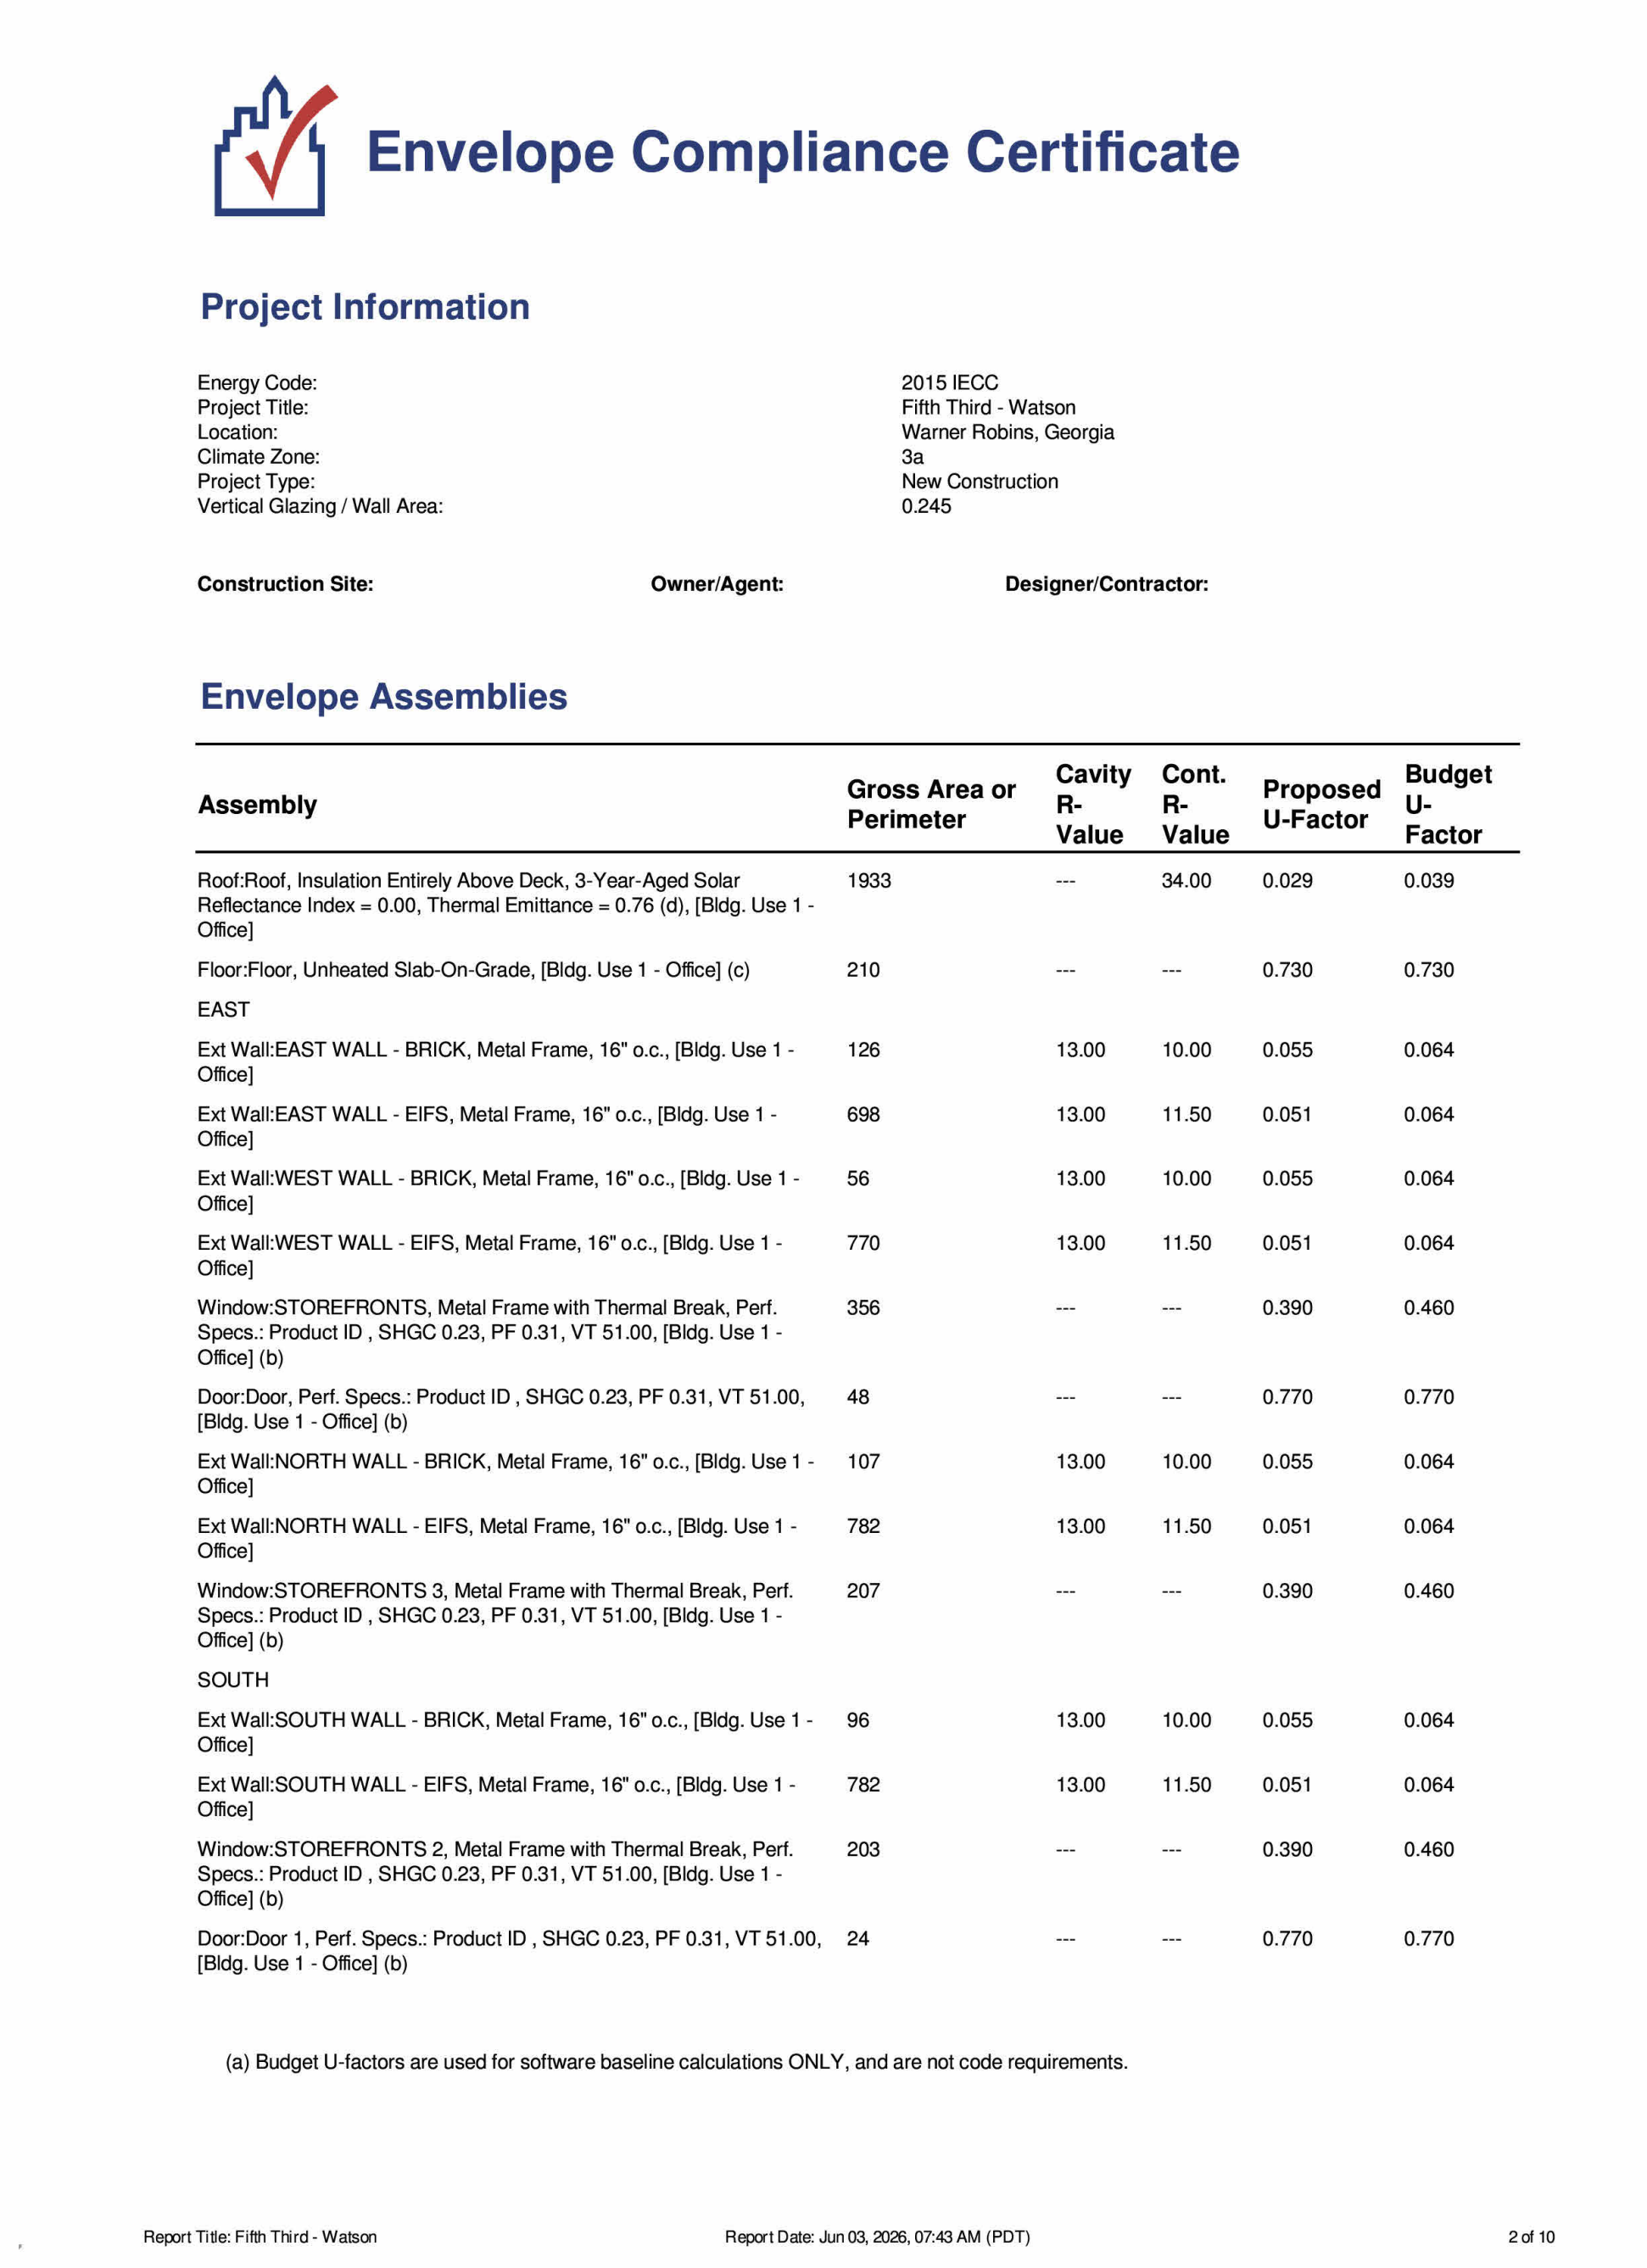

Envelope Compliance Certificate

Project Information

Energy Code:	2015 IECC
Project Title:	Fifth Third - Watson
Location:	Warner Robins, Georgia
Climate Zone:	3a
Project Type:	New Construction
Vertical Glazing / Wall Area:	0.245

Construction Site: **Owner/Agent:** **Designer/Contractor:**

Envelope Assemblies

Assembly	Gross Area or Perimeter	Cavity R-Value	Cont. R-Value	Proposed U-Factor	Budget U-Factor
Roof:Roof, Insulation Entirely Above Deck, 3-Year-Aged Solar Reflectance Index = 0.00, Thermal Emittance = 0.76 (d), [Bldg. Use 1 - Office]	1933	---	34.00	0.029	0.039
Floor:Floor, Unheated Slab-On-Grade, [Bldg. Use 1 - Office] (c)	210	---	---	0.730	0.730
EAST					
Ext Wall:EAST WALL - BRICK, Metal Frame, 16" o.c., [Bldg. Use 1 - Office]	126	13.00	10.00	0.055	0.064
Ext Wall:EAST WALL - EIFS, Metal Frame, 16" o.c., [Bldg. Use 1 - Office]	698	13.00	11.50	0.051	0.064
Ext Wall:WEST WALL - BRICK, Metal Frame, 16" o.c., [Bldg. Use 1 - Office]	56	13.00	10.00	0.055	0.064
Ext Wall:WEST WALL - EIFS, Metal Frame, 16" o.c., [Bldg. Use 1 - Office]	770	13.00	11.50	0.051	0.064
Window:STOREFRONTS, Metal Frame with Thermal Break, Perf. Specs.: Product ID , SHGC 0.23, PF 0.31, VT 51.00, [Bldg. Use 1 - Office] (b)	356	---	---	0.390	0.460
Door:Door, Perf. Specs.: Product ID , SHGC 0.23, PF 0.31, VT 51.00, [Bldg. Use 1 - Office] (b)	48	---	---	0.770	0.770
Ext Wall:NORTH WALL - BRICK, Metal Frame, 16" o.c., [Bldg. Use 1 - Office]	107	13.00	10.00	0.055	0.064
Ext Wall:NORTH WALL - EIFS, Metal Frame, 16" o.c., [Bldg. Use 1 - Office]	782	13.00	11.50	0.051	0.064
Window:STOREFRONTS 3, Metal Frame with Thermal Break, Perf. Specs.: Product ID , SHGC 0.23, PF 0.31, VT 51.00, [Bldg. Use 1 - Office] (b)	207	---	---	0.390	0.460
SOUTH					
Ext Wall:SOUTH WALL - BRICK, Metal Frame, 16" o.c., [Bldg. Use 1 - Office]	96	13.00	10.00	0.055	0.064
Ext Wall:SOUTH WALL - EIFS, Metal Frame, 16" o.c., [Bldg. Use 1 - Office]	782	13.00	11.50	0.051	0.064
Window:STOREFRONTS 2, Metal Frame with Thermal Break, Perf. Specs.: Product ID , SHGC 0.23, PF 0.31, VT 51.00, [Bldg. Use 1 - Office] (b)	203	---	---	0.390	0.460
Door:Door 1, Perf. Specs.: Product ID , SHGC 0.23, PF 0.31, VT 51.00, [Bldg. Use 1 - Office] (b)	24	---	---	0.770	0.770

(a) Budget U-factors are used for software baseline calculations ONLY, and are not code requirements.

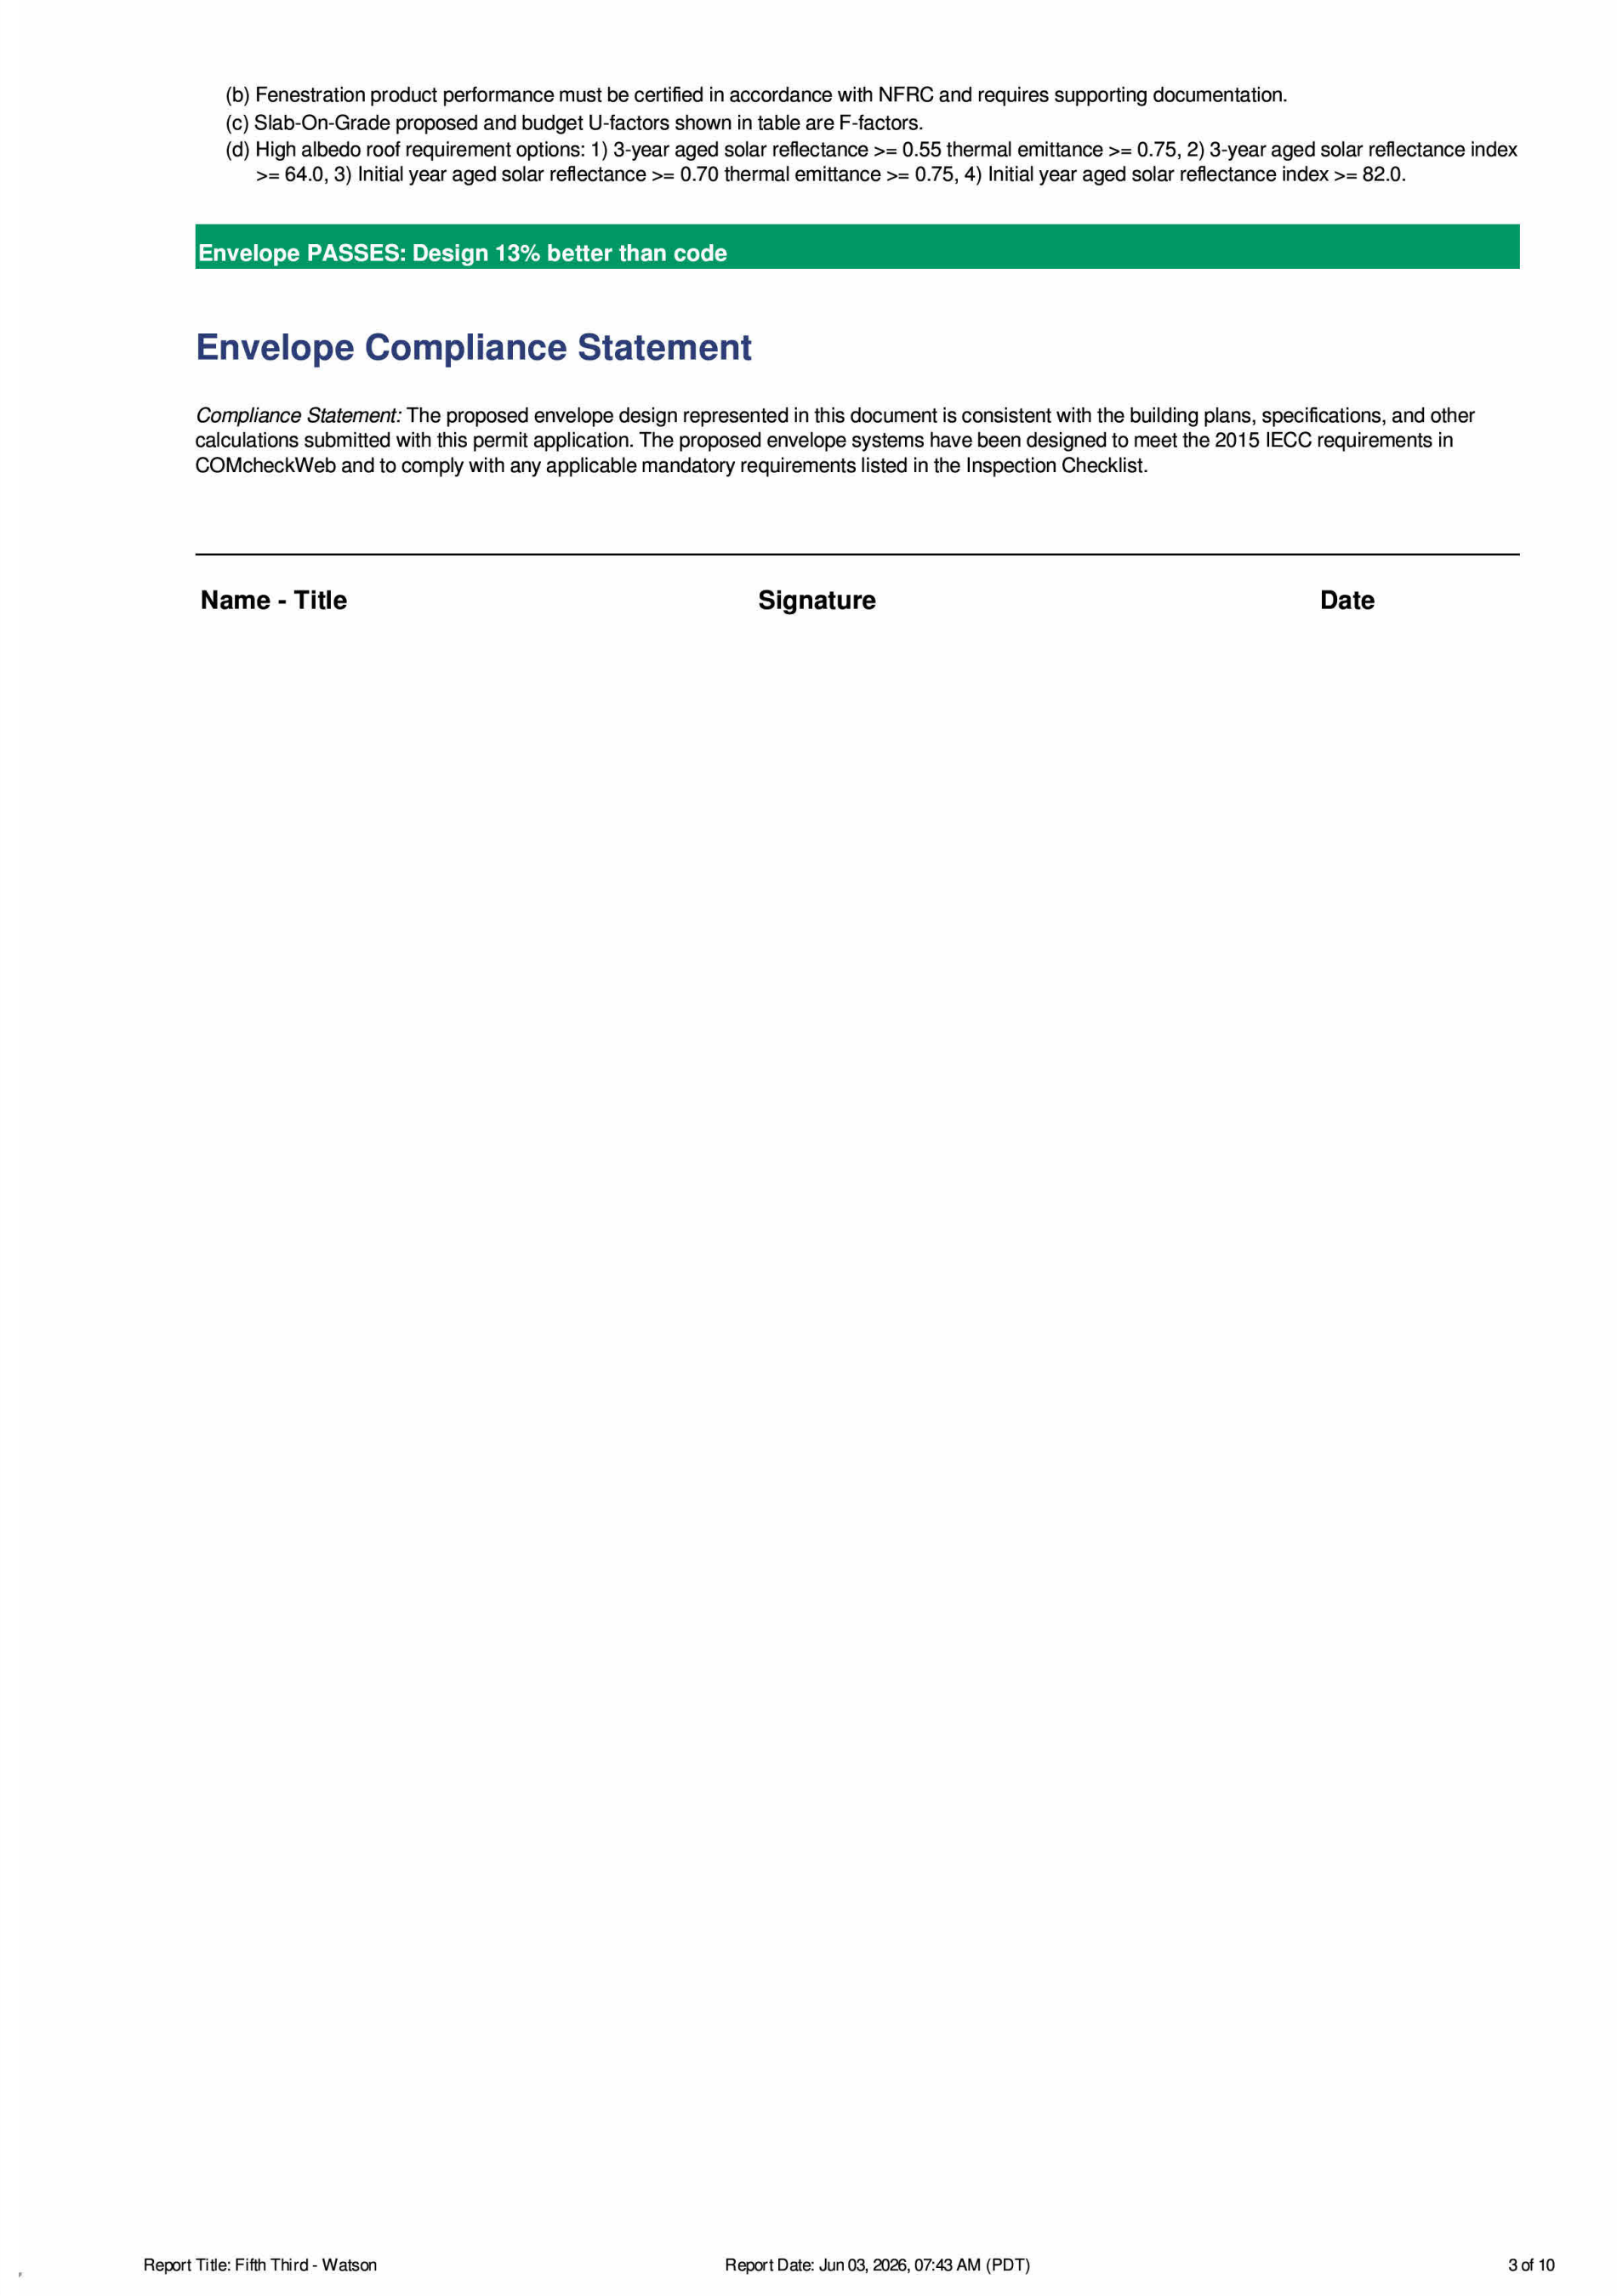

(b) Fenestration product performance must be certified in accordance with NFRC and requires supporting documentation.

(c) Slab-On-Grade proposed and budget U-factors shown in table are F-factors.

(d) High albedo roof requirement options: 1) 3-year aged solar reflectance >= 0.55 thermal emittance >= 0.75, 2) 3-year aged solar reflectance index >= 64.0, 3) Initial year aged solar reflectance >= 0.70 thermal emittance >= 0.75, 4) Initial year aged solar reflectance index >= 82.0.

Envelope PASSES: Design 13% better than code

Envelope Compliance Statement

Compliance Statement: The proposed envelope design represented in this document is consistent with the building plans, specifications, and other calculations submitted with this permit application. The proposed envelope systems have been designed to meet the 2015 IECC requirements in COMcheckWeb and to comply with any applicable mandatory requirements listed in the Inspection Checklist.

Name - Title	Signature	Date

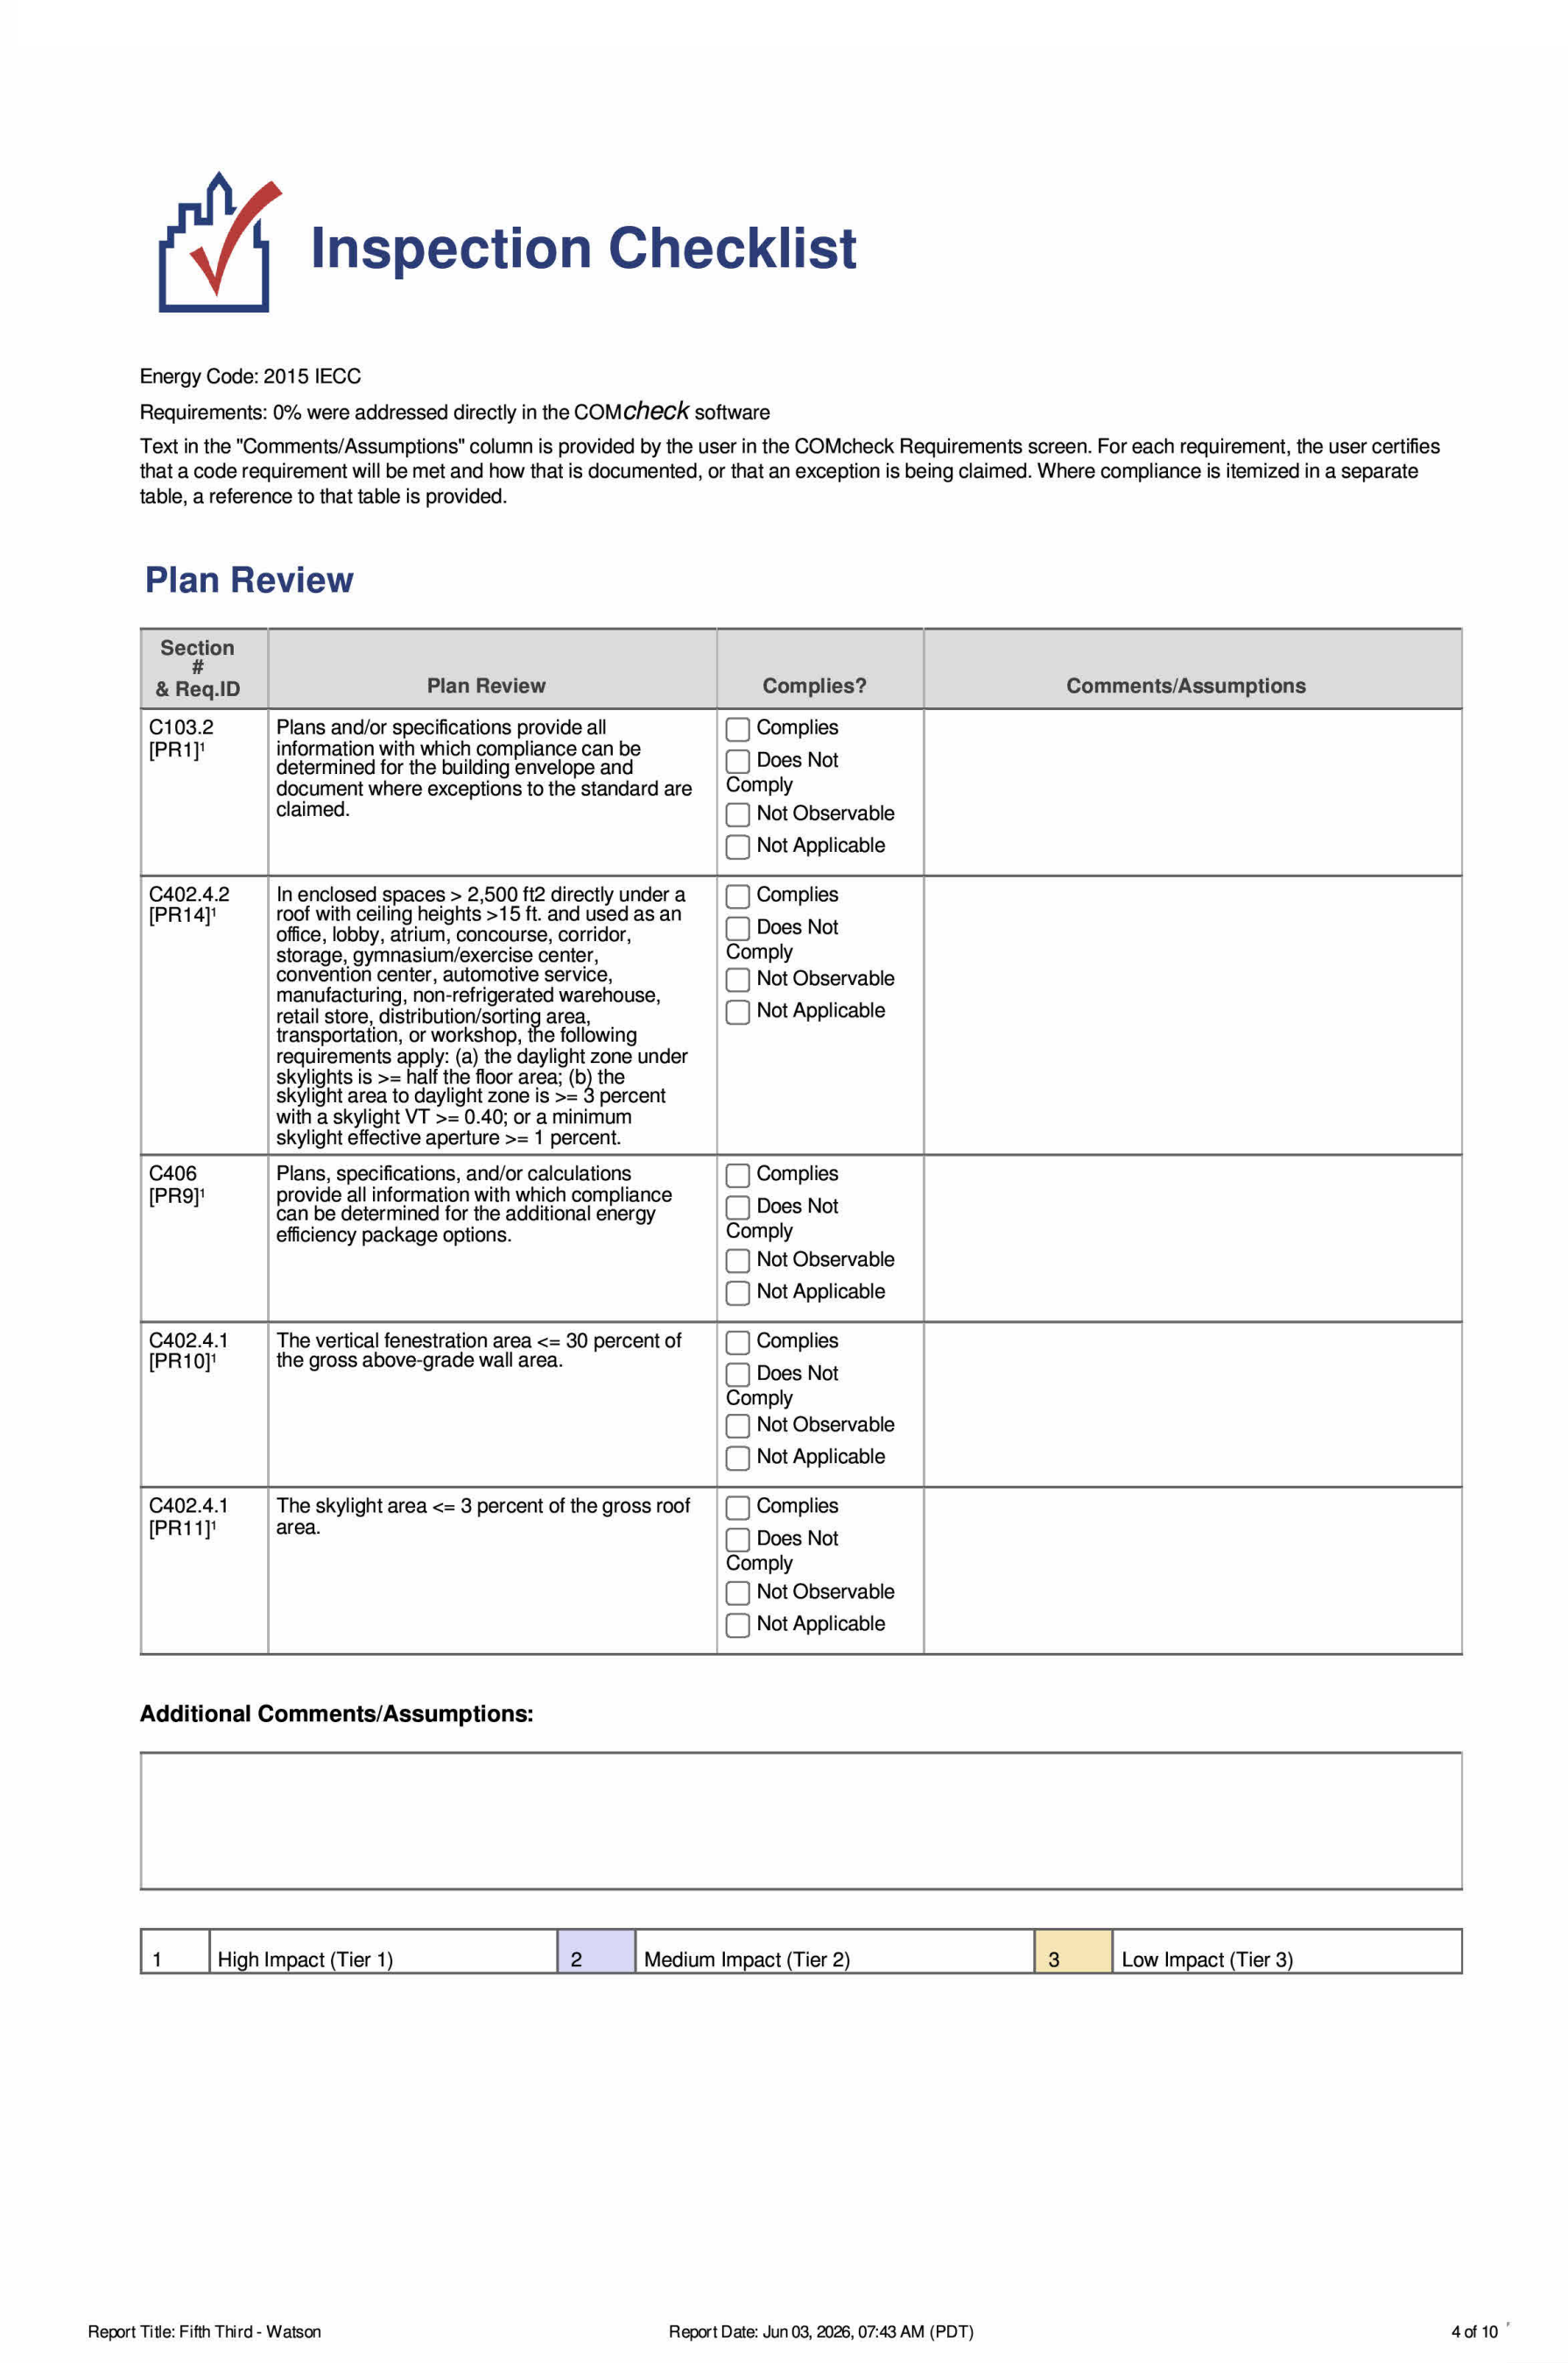

Inspection Checklist

Energy Code: 2015 IECC

Requirements: 0% were addressed directly in the COM*check* software

Text in the "Comments/Assumptions" column is provided by the user in the COMcheck Requirements screen. For each requirement, the user certifies that a code requirement will be met and how that is documented, or that an exception is being claimed. Where compliance is itemized in a separate table, a reference to that table is provided.

Plan Review

Section # & Req.ID	Plan Review	Complies?	Comments/Assumptions
C103.2 [PR1]^{1}	Plans and/or specifications provide all information with which compliance can be determined for the building envelope and document where exceptions to the standard are claimed.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.4.2 [PR14]^{1}	In enclosed spaces > 2,500 ft2 directly under a roof with ceiling heights >15 ft. and used as an office, lobby, atrium, concourse, corridor, storage, gymnasium/exercise center, convention center, automotive service, manufacturing, non-refrigerated warehouse, retail store, distribution/sorting area, transportation, or workshop, the following requirements apply: (a) the daylight zone under skylights is >= half the floor area; (b) the skylight area to daylight zone is >= 3 percent with a skylight VT >= 0.40; or a minimum skylight effective aperture >= 1 percent.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C406 [PR9]^{1}	Plans, specifications, and/or calculations provide all information with which compliance can be determined for the additional energy efficiency package options.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.4.1 [PR10]^{1}	The vertical fenestration area <= 30 percent of the gross above-grade wall area.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.4.1 [PR11]^{1}	The skylight area <= 3 percent of the gross roof area.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1	High Impact (Tier 1)	2	Medium Impact (Tier 2)	3	Low Impact (Tier 3)

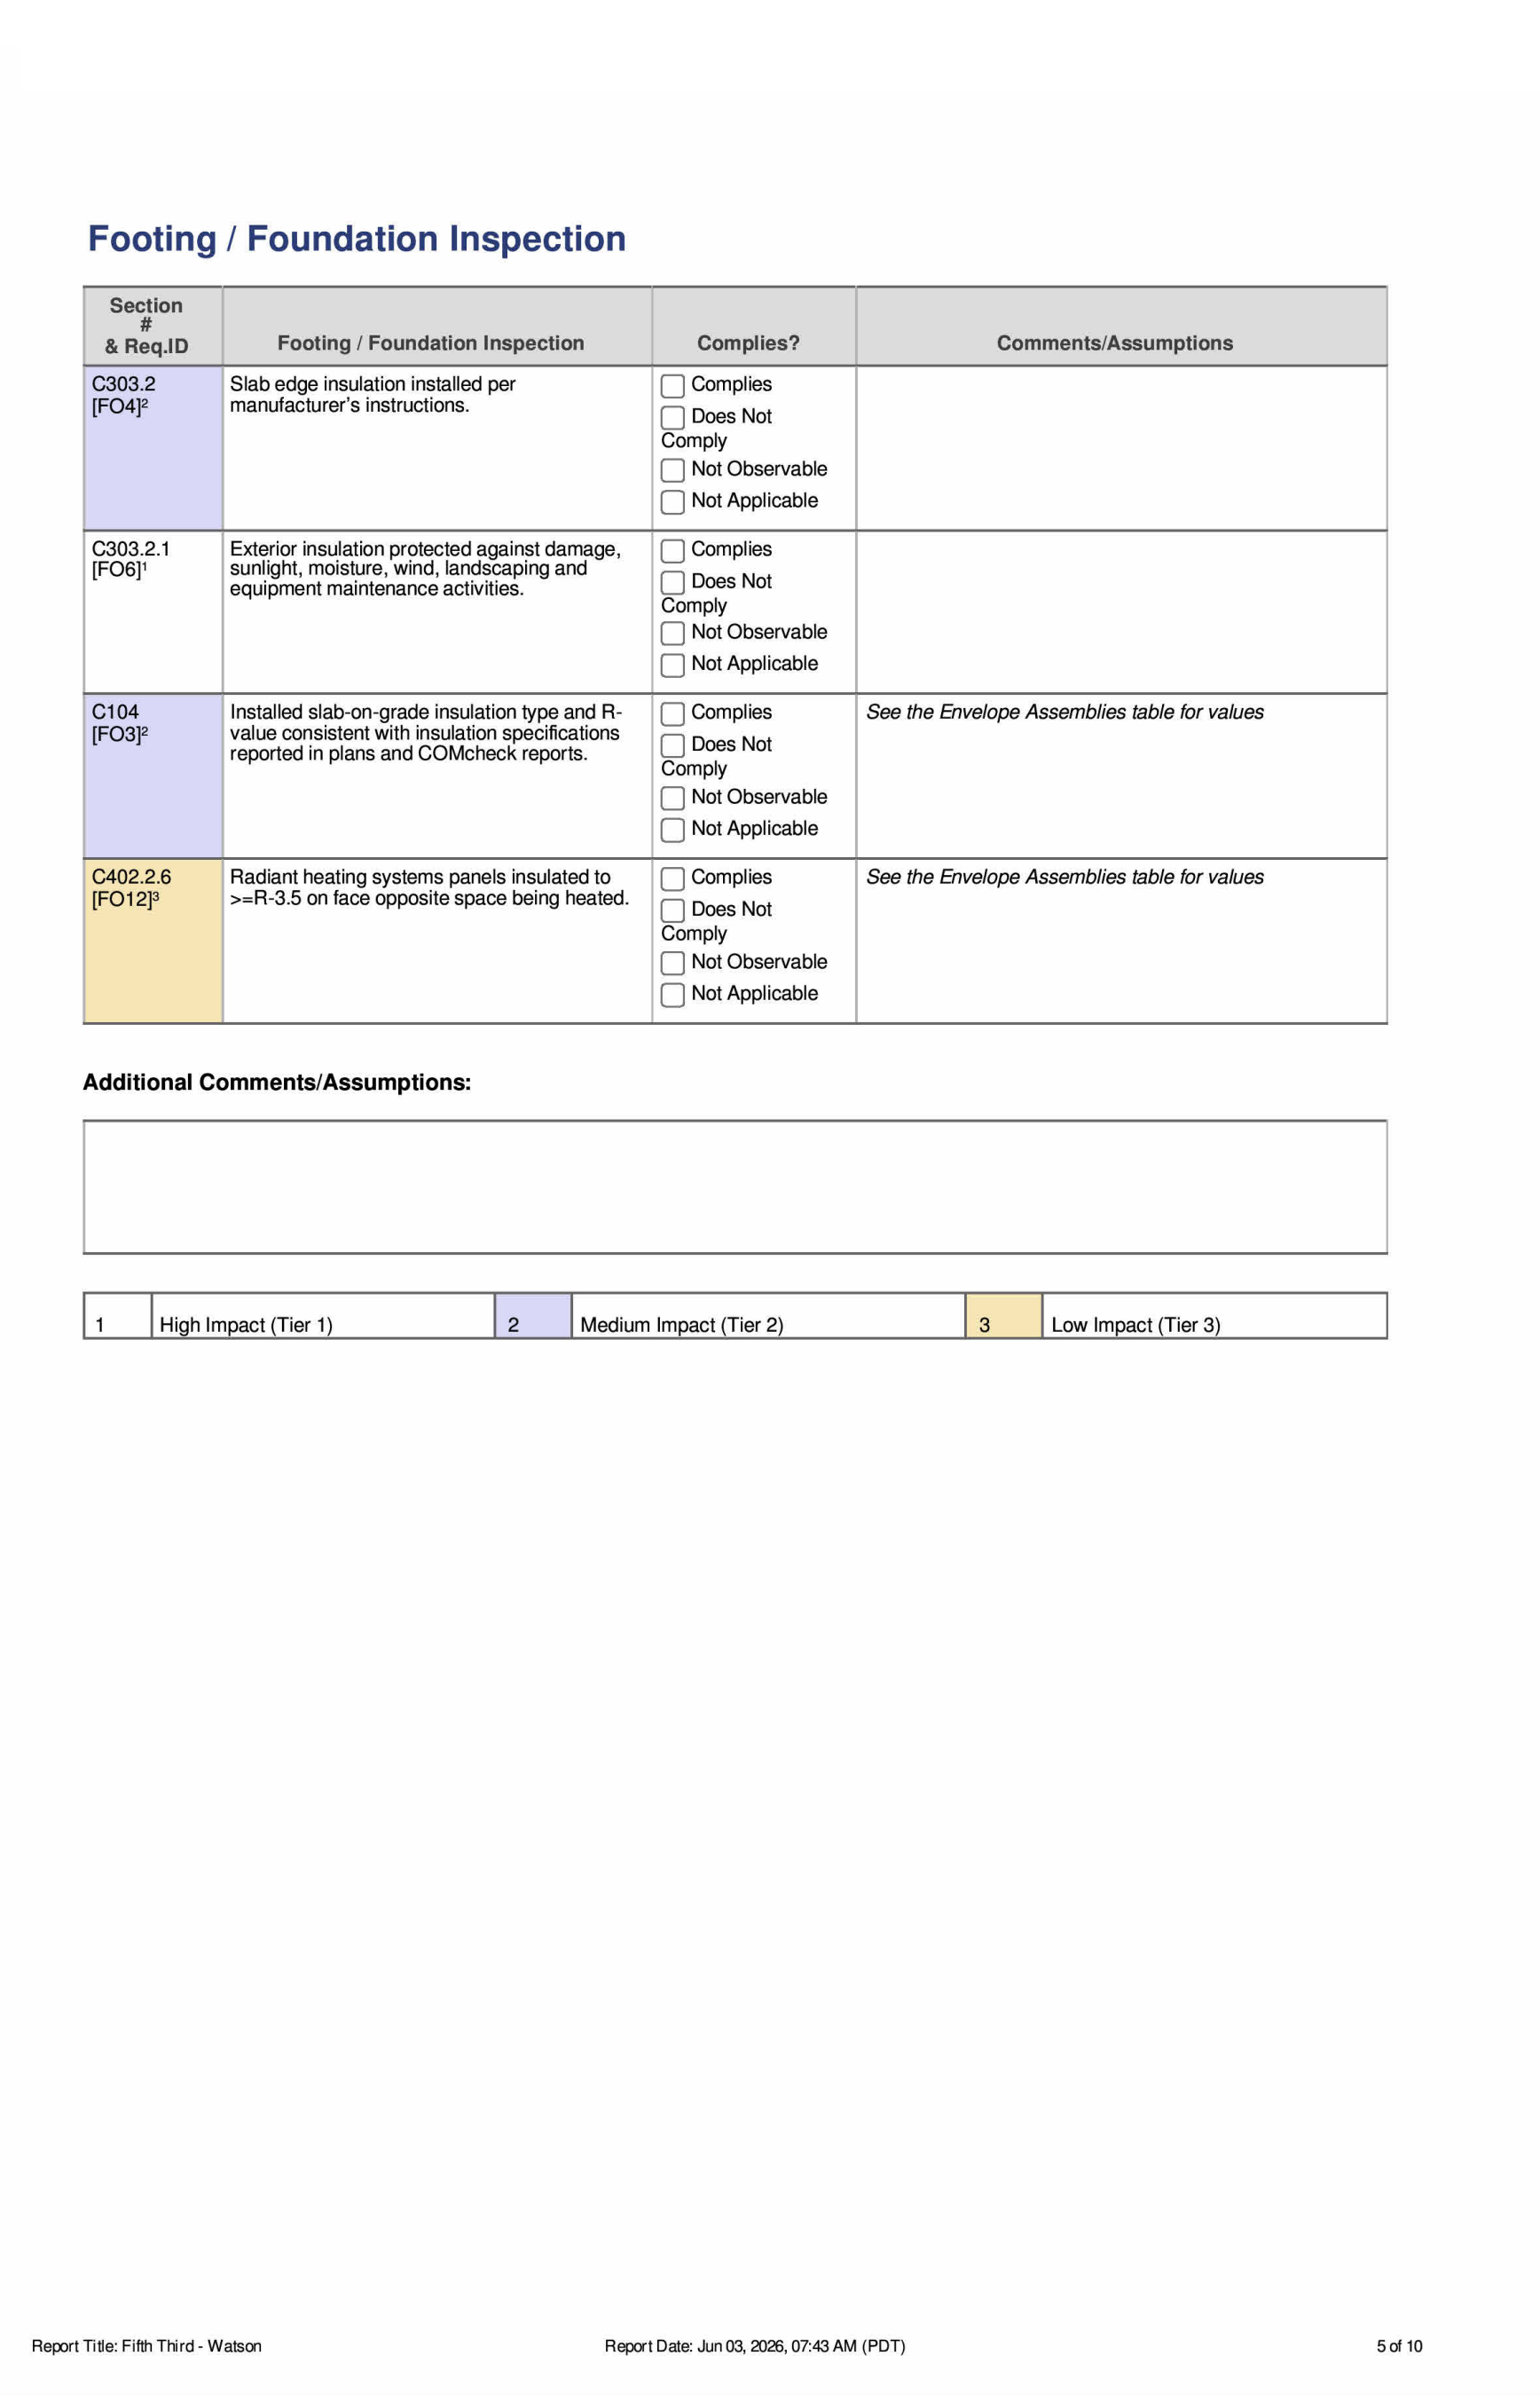

Footing / Foundation Inspection

Section # & Req.ID	Footing / Foundation Inspection	Complies?	Comments/Assumptions
C303.2 [FO4]^{2}	Slab edge insulation installed per manufacturer's instructions.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C303.2.1 [FO6]^{1}	Exterior insulation protected against damage, sunlight, moisture, wind, landscaping and equipment maintenance activities.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C104 [FO3]^{2}	Installed slab-on-grade insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	*See the Envelope Assemblies table for values*
C402.2.6 [FO12]^{3}	Radiant heating systems panels insulated to >=R-3.5 on face opposite space being heated.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	*See the Envelope Assemblies table for values*

Additional Comments/Assumptions:

1	High Impact (Tier 1)	2	Medium Impact (Tier 2)	3	Low Impact (Tier 3)

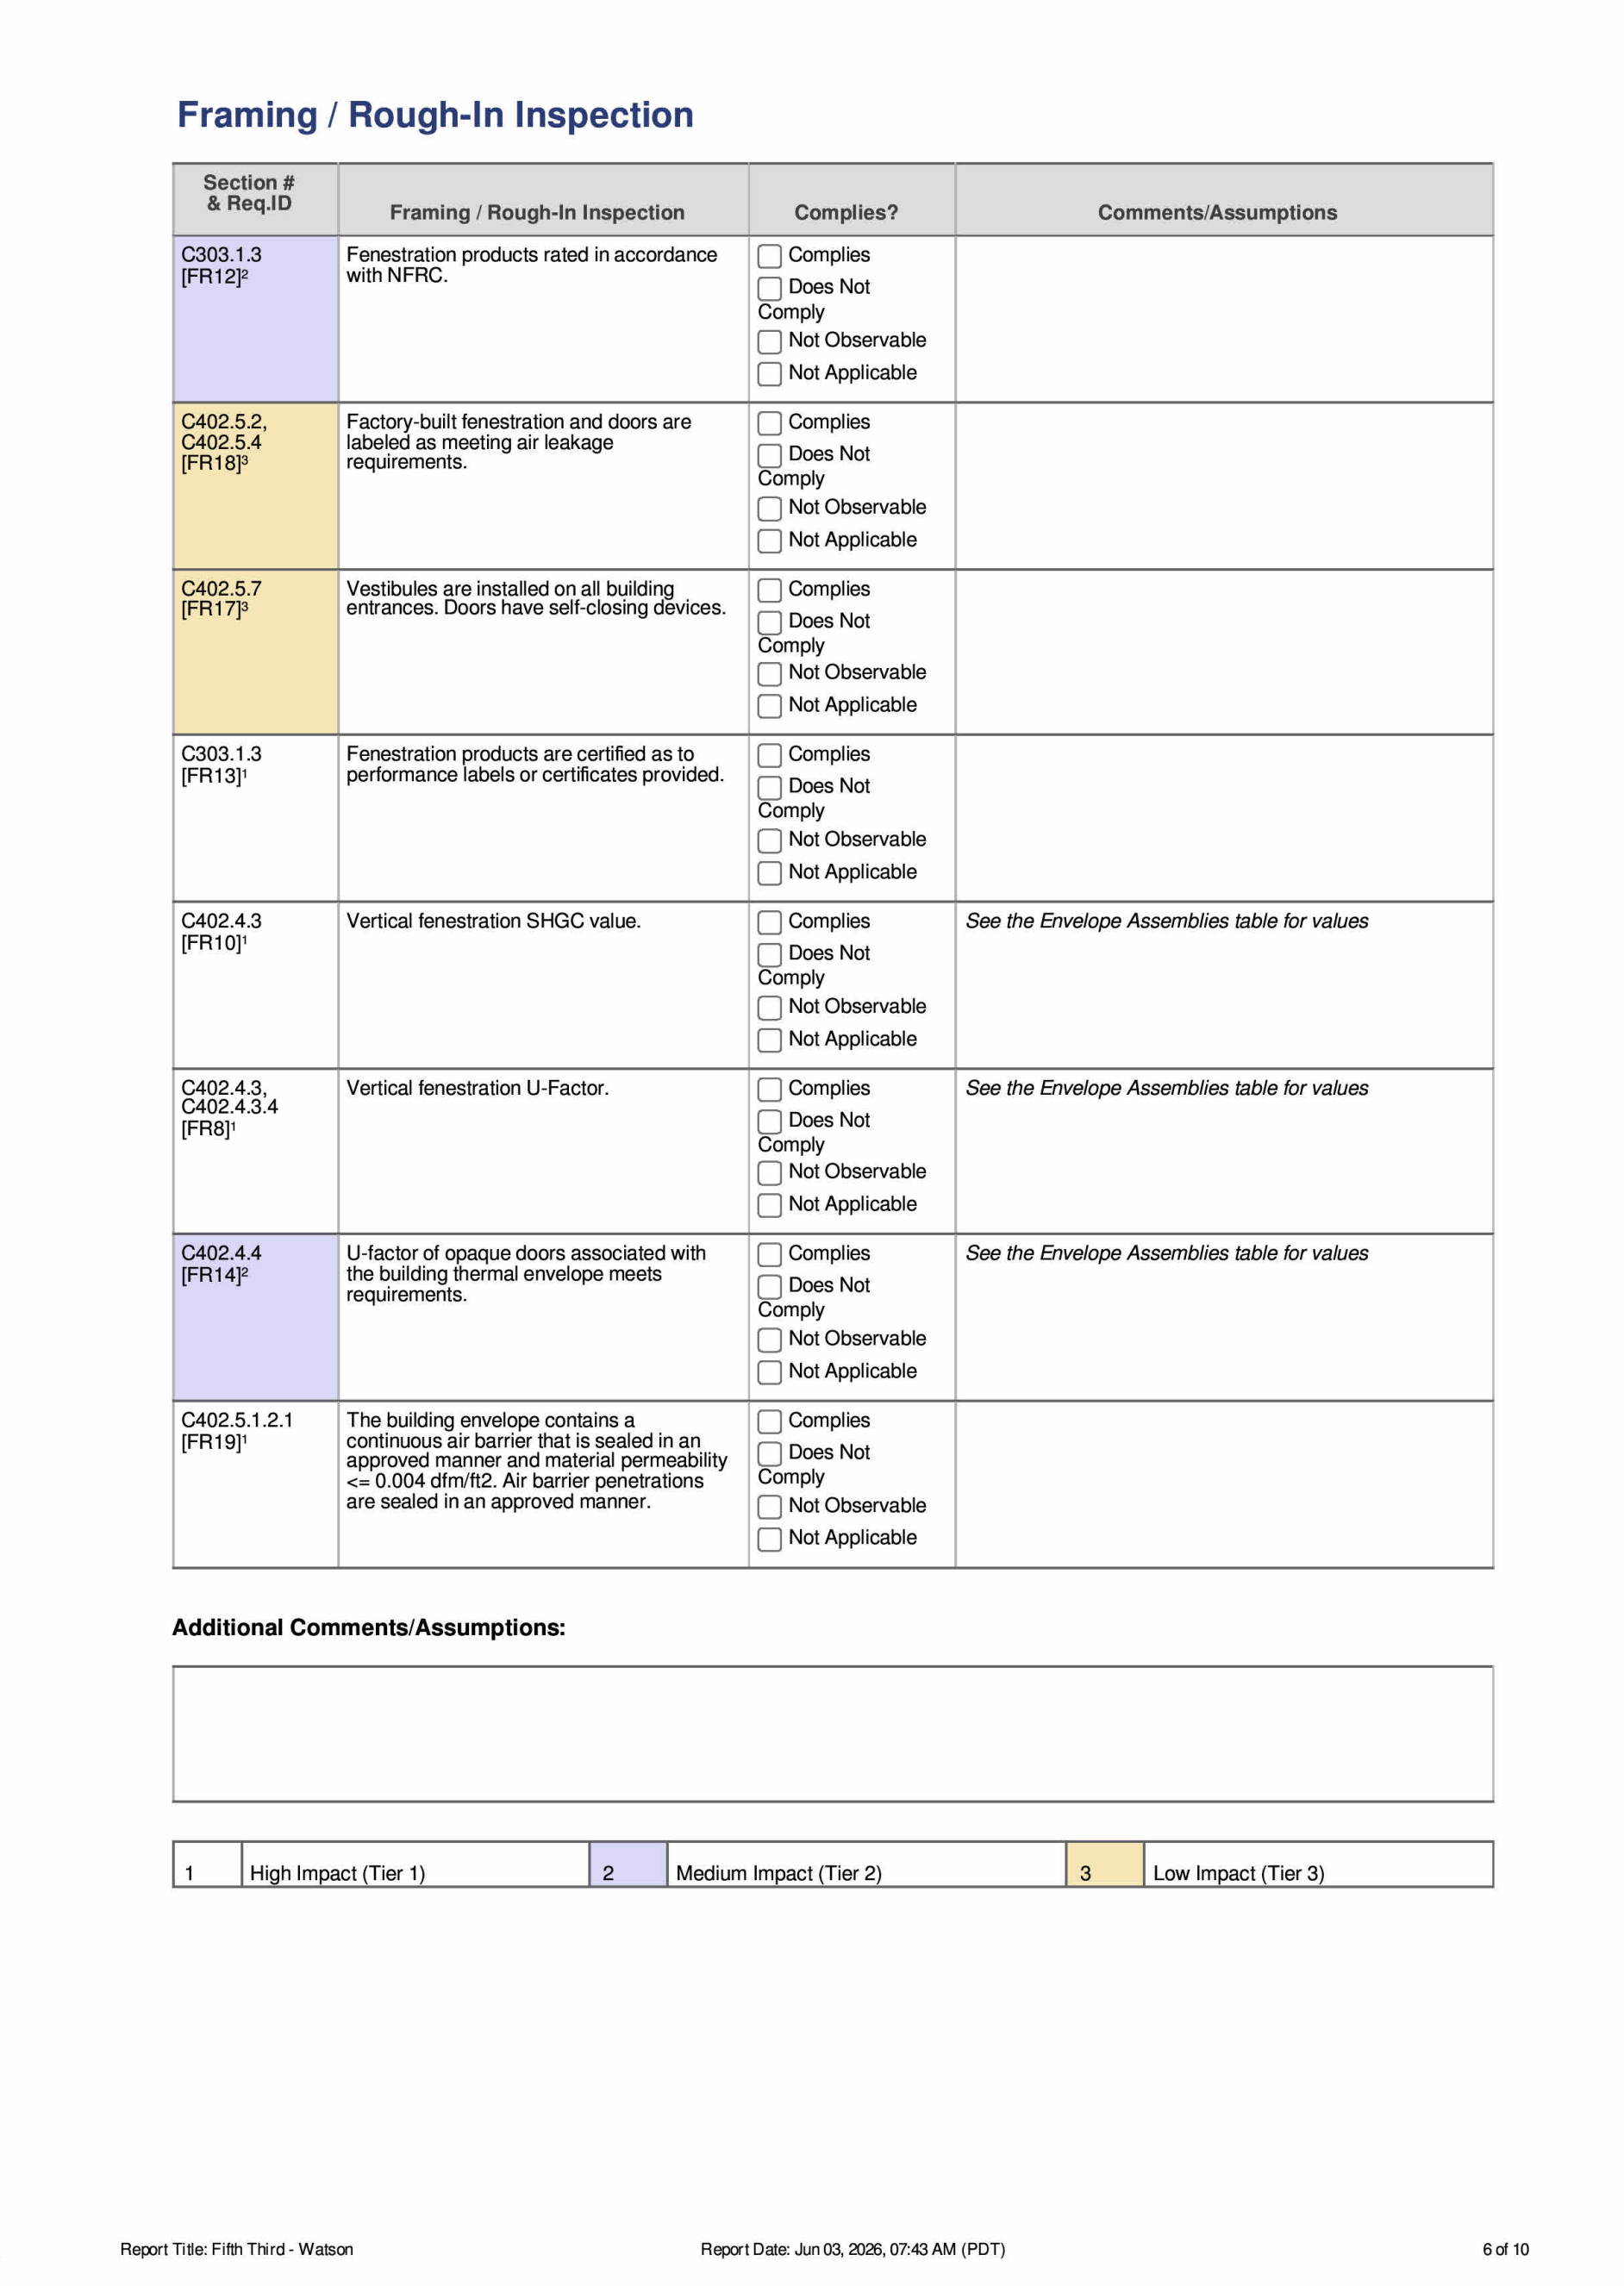

Framing / Rough-In Inspection

Section # & Req.ID	Framing / Rough-In Inspection	Complies?	Comments/Assumptions
C303.1.3 [FR12]^{2}	Fenestration products rated in accordance with NFRC.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.5.2, C402.5.4 [FR18]^{3}	Factory-built fenestration and doors are labeled as meeting air leakage requirements.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.5.7 [FR17]^{3}	Vestibules are installed on all building entrances. Doors have self-closing devices.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C303.1.3 [FR13]^{1}	Fenestration products are certified as to performance labels or certificates provided.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.4.3 [FR10]^{1}	Vertical fenestration SHGC value.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	*See the Envelope Assemblies table for values*
C402.4.3, C402.4.3.4 [FR8]^{1}	Vertical fenestration U-Factor.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	*See the Envelope Assemblies table for values*
C402.4.4 [FR14]^{2}	U-factor of opaque doors associated with the building thermal envelope meets requirements.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	*See the Envelope Assemblies table for values*
C402.5.1.2.1 [FR19]^{1}	The building envelope contains a continuous air barrier that is sealed in an approved manner and material permeability <= 0.004 cfm/ft2. Air barrier penetrations are sealed in an approved manner.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1	High Impact (Tier 1)	2	Medium Impact (Tier 2)	3	Low Impact (Tier 3)

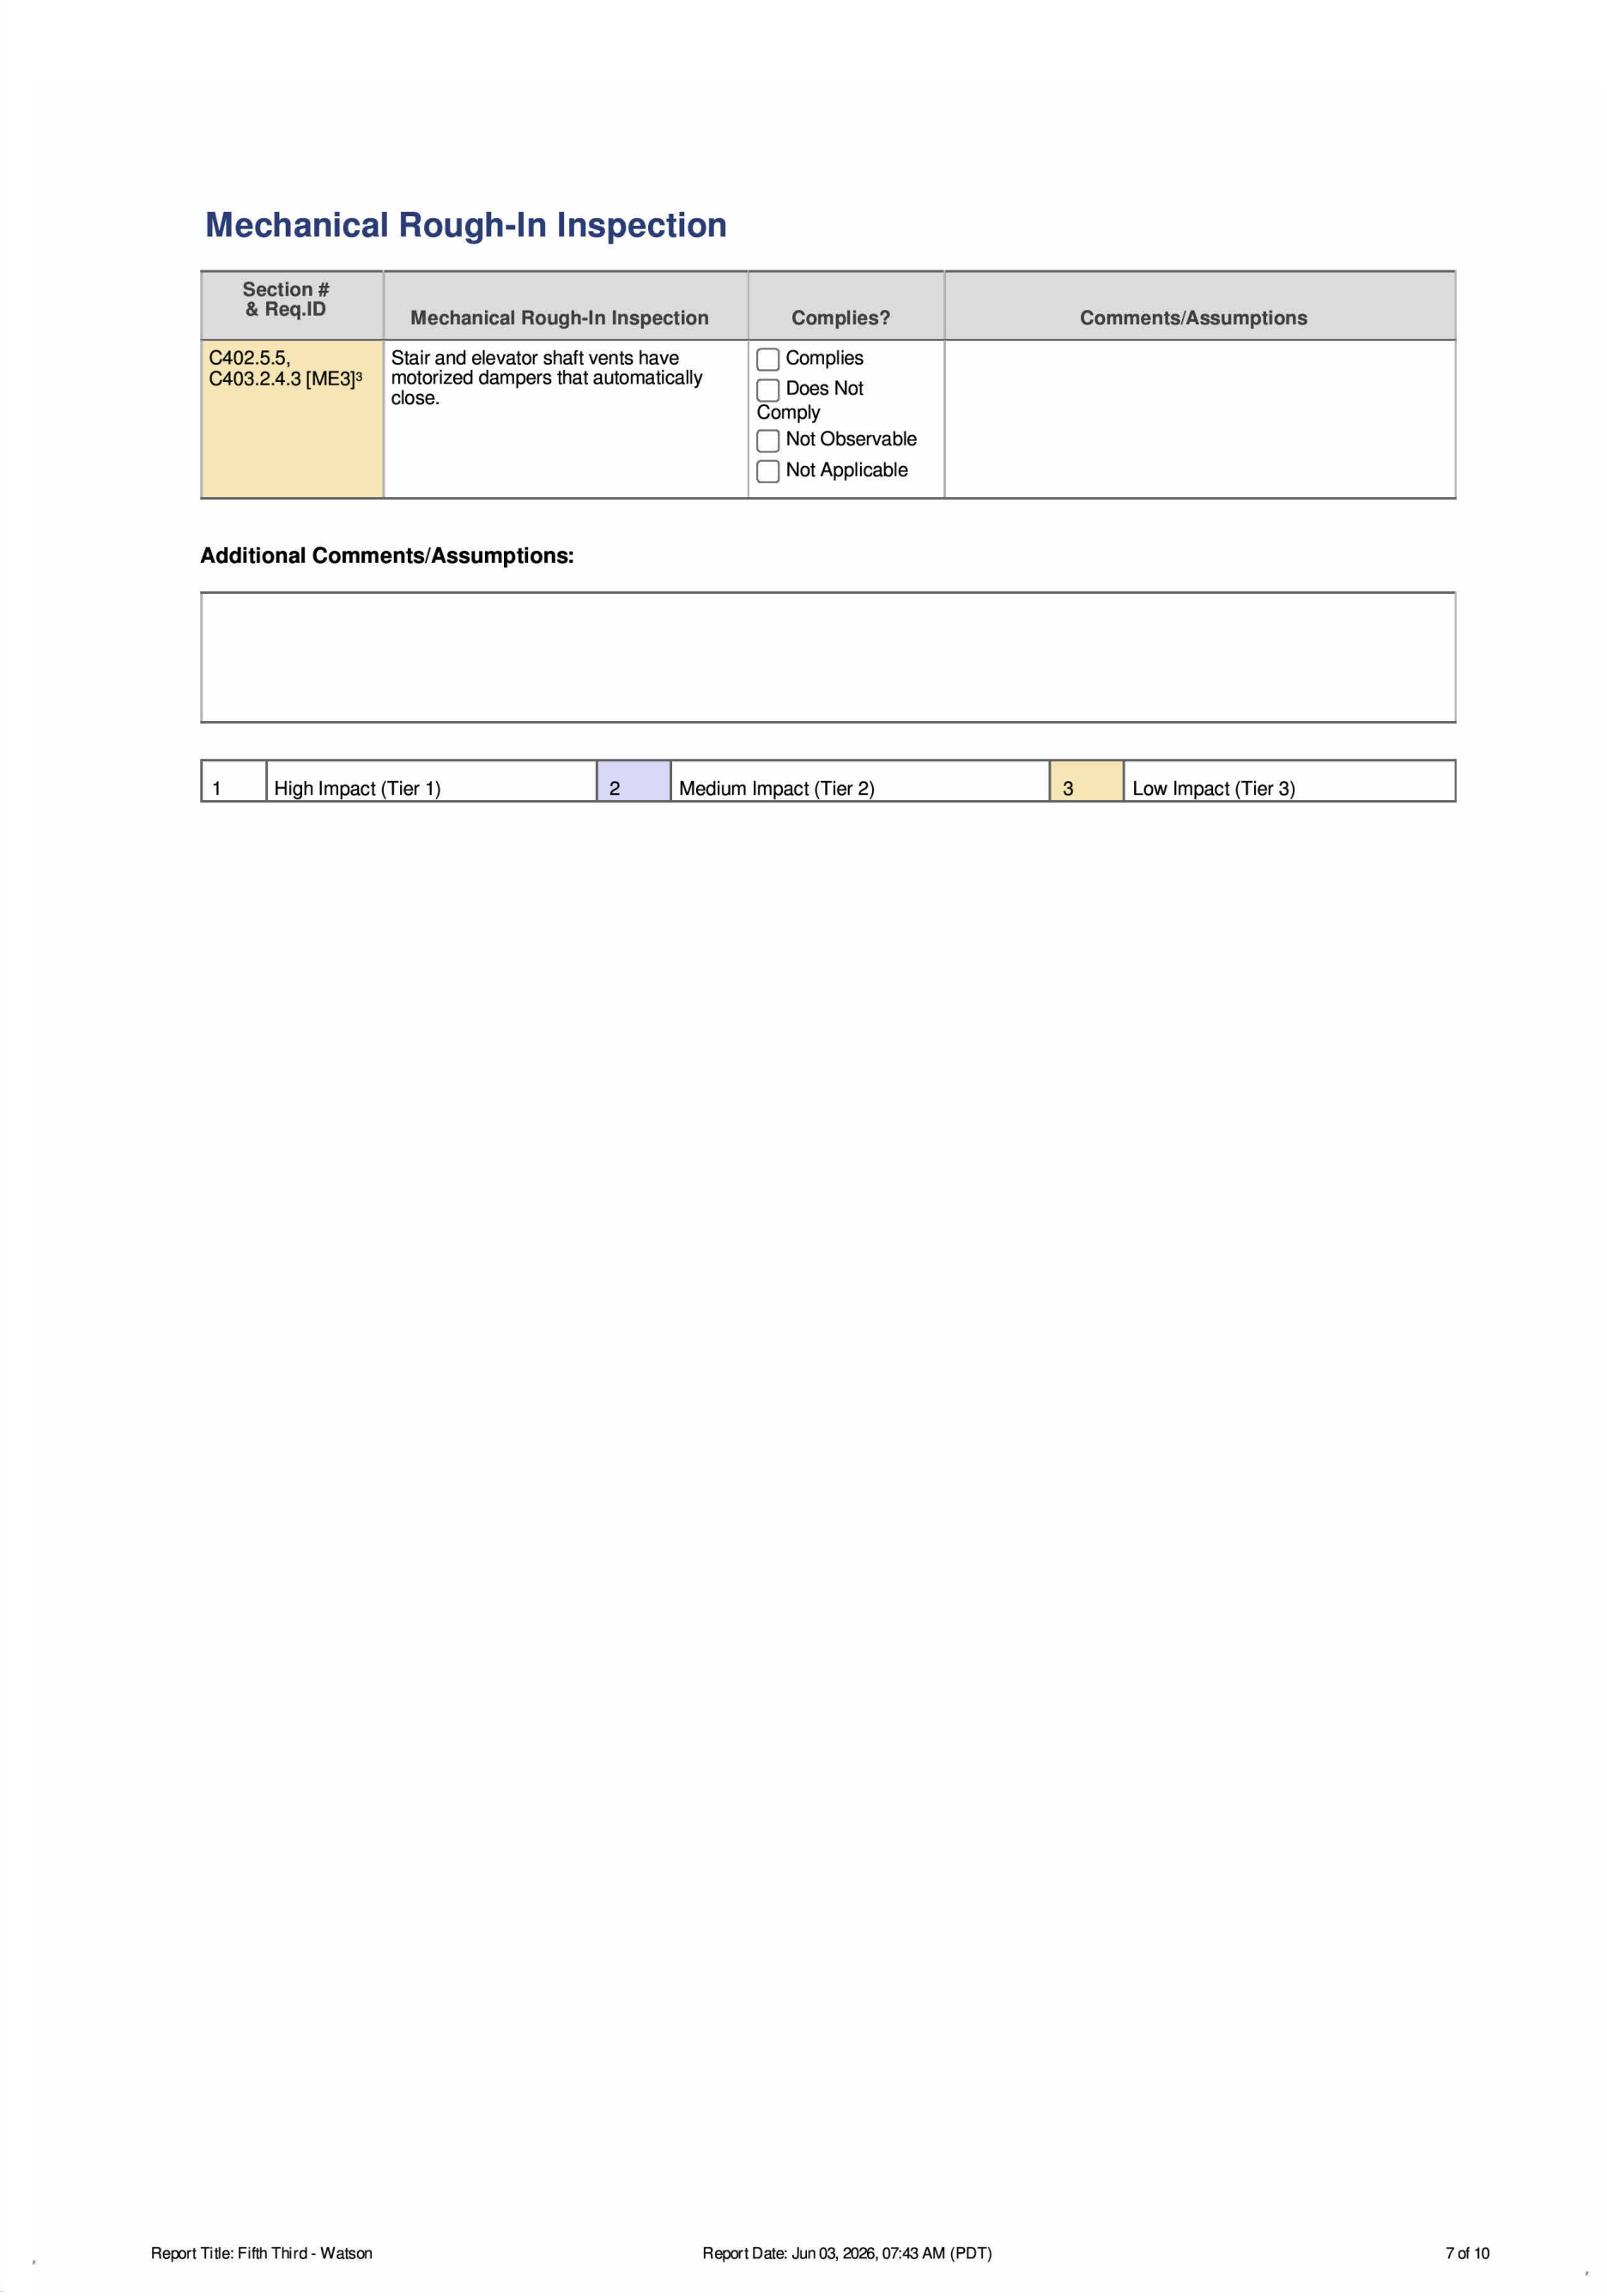

Mechanical Rough-In Inspection

Section # & Req.ID	Mechanical Rough-In Inspection	Complies?	Comments/Assumptions
C402.5.5, C403.2.4.3 [ME3]^{3}	Stair and elevator shaft vents have motorized dampers that automatically close.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1	High Impact (Tier 1)	2	Medium Impact (Tier 2)	3	Low Impact (Tier 3)

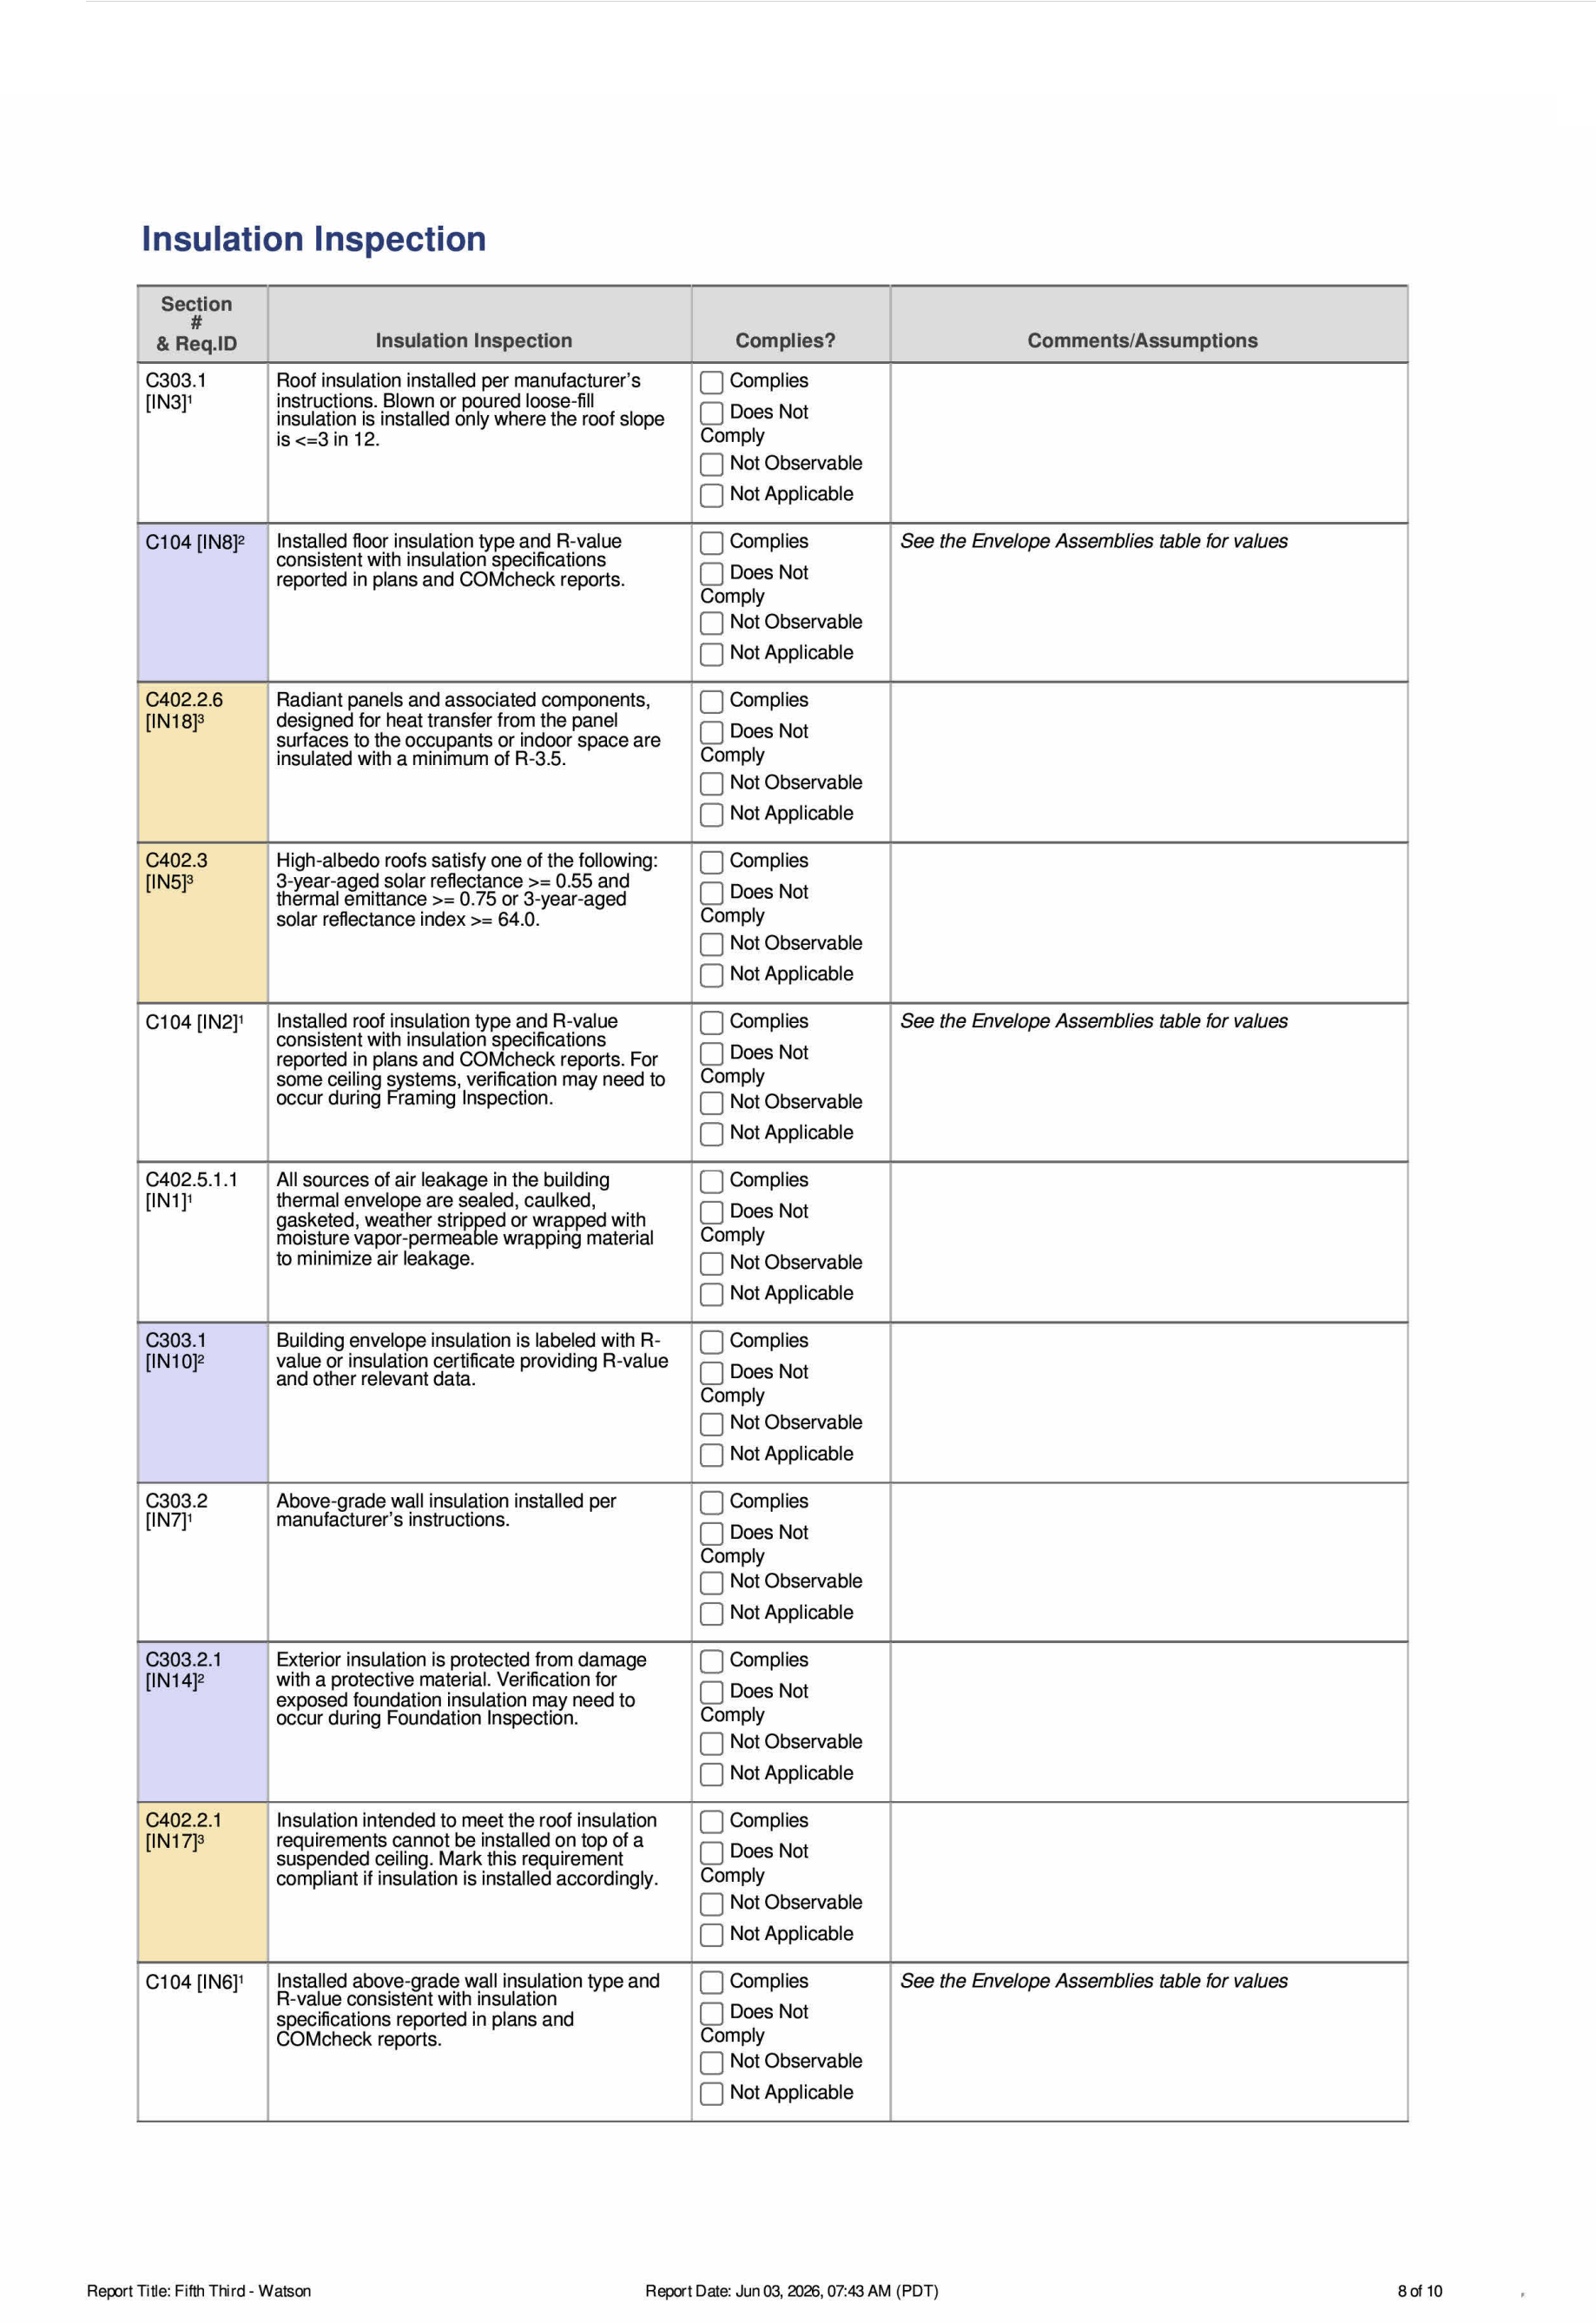

Insulation Inspection

Section # & Req.ID	Insulation Inspection	Complies?	Comments/Assumptions
C303.1 [IN3]^{1}	Roof insulation installed per manufacturer's instructions. Blown or poured loose-fill insulation is installed only where the roof slope is <=3 in 12.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C104 [IN8]^{2}	Installed floor insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	*See the Envelope Assemblies table for values*
C402.2.6 [IN18]^{3}	Radiant panels and associated components, designed for heat transfer from the panel surfaces to the occupants or indoor space are insulated with a minimum of R-3.5.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.3 [IN5]^{3}	High-albedo roofs satisfy one of the following: 3-year-aged solar reflectance >= 0.55 and thermal emittance >= 0.75 or 3-year-aged solar reflectance index >= 64.0.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C104 [IN2]^{1}	Installed roof insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports. For some ceiling systems, verification may need to occur during Framing Inspection.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	*See the Envelope Assemblies table for values*
C402.5.1.1 [IN1]^{1}	All sources of air leakage in the building thermal envelope are sealed, caulked, gasketed, weather stripped or wrapped with moisture vapor-permeable wrapping material to minimize air leakage.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C303.1 [IN10]^{2}	Building envelope insulation is labeled with R-value or insulation certificate providing R-value and other relevant data.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C303.2 [IN7]^{1}	Above-grade wall insulation installed per manufacturer's instructions.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C303.2.1 [IN14]^{2}	Exterior insulation is protected from damage with a protective material. Verification for exposed foundation insulation may need to occur during Foundation Inspection.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.2.1 [IN17]^{3}	Insulation intended to meet the roof insulation requirements cannot be installed on top of a suspended ceiling. Mark this requirement compliant if insulation is installed accordingly.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C104 [IN6]^{1}	Installed above-grade wall insulation type and R-value consistent with insulation specifications reported in plans and COMcheck reports.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	*See the Envelope Assemblies table for values*

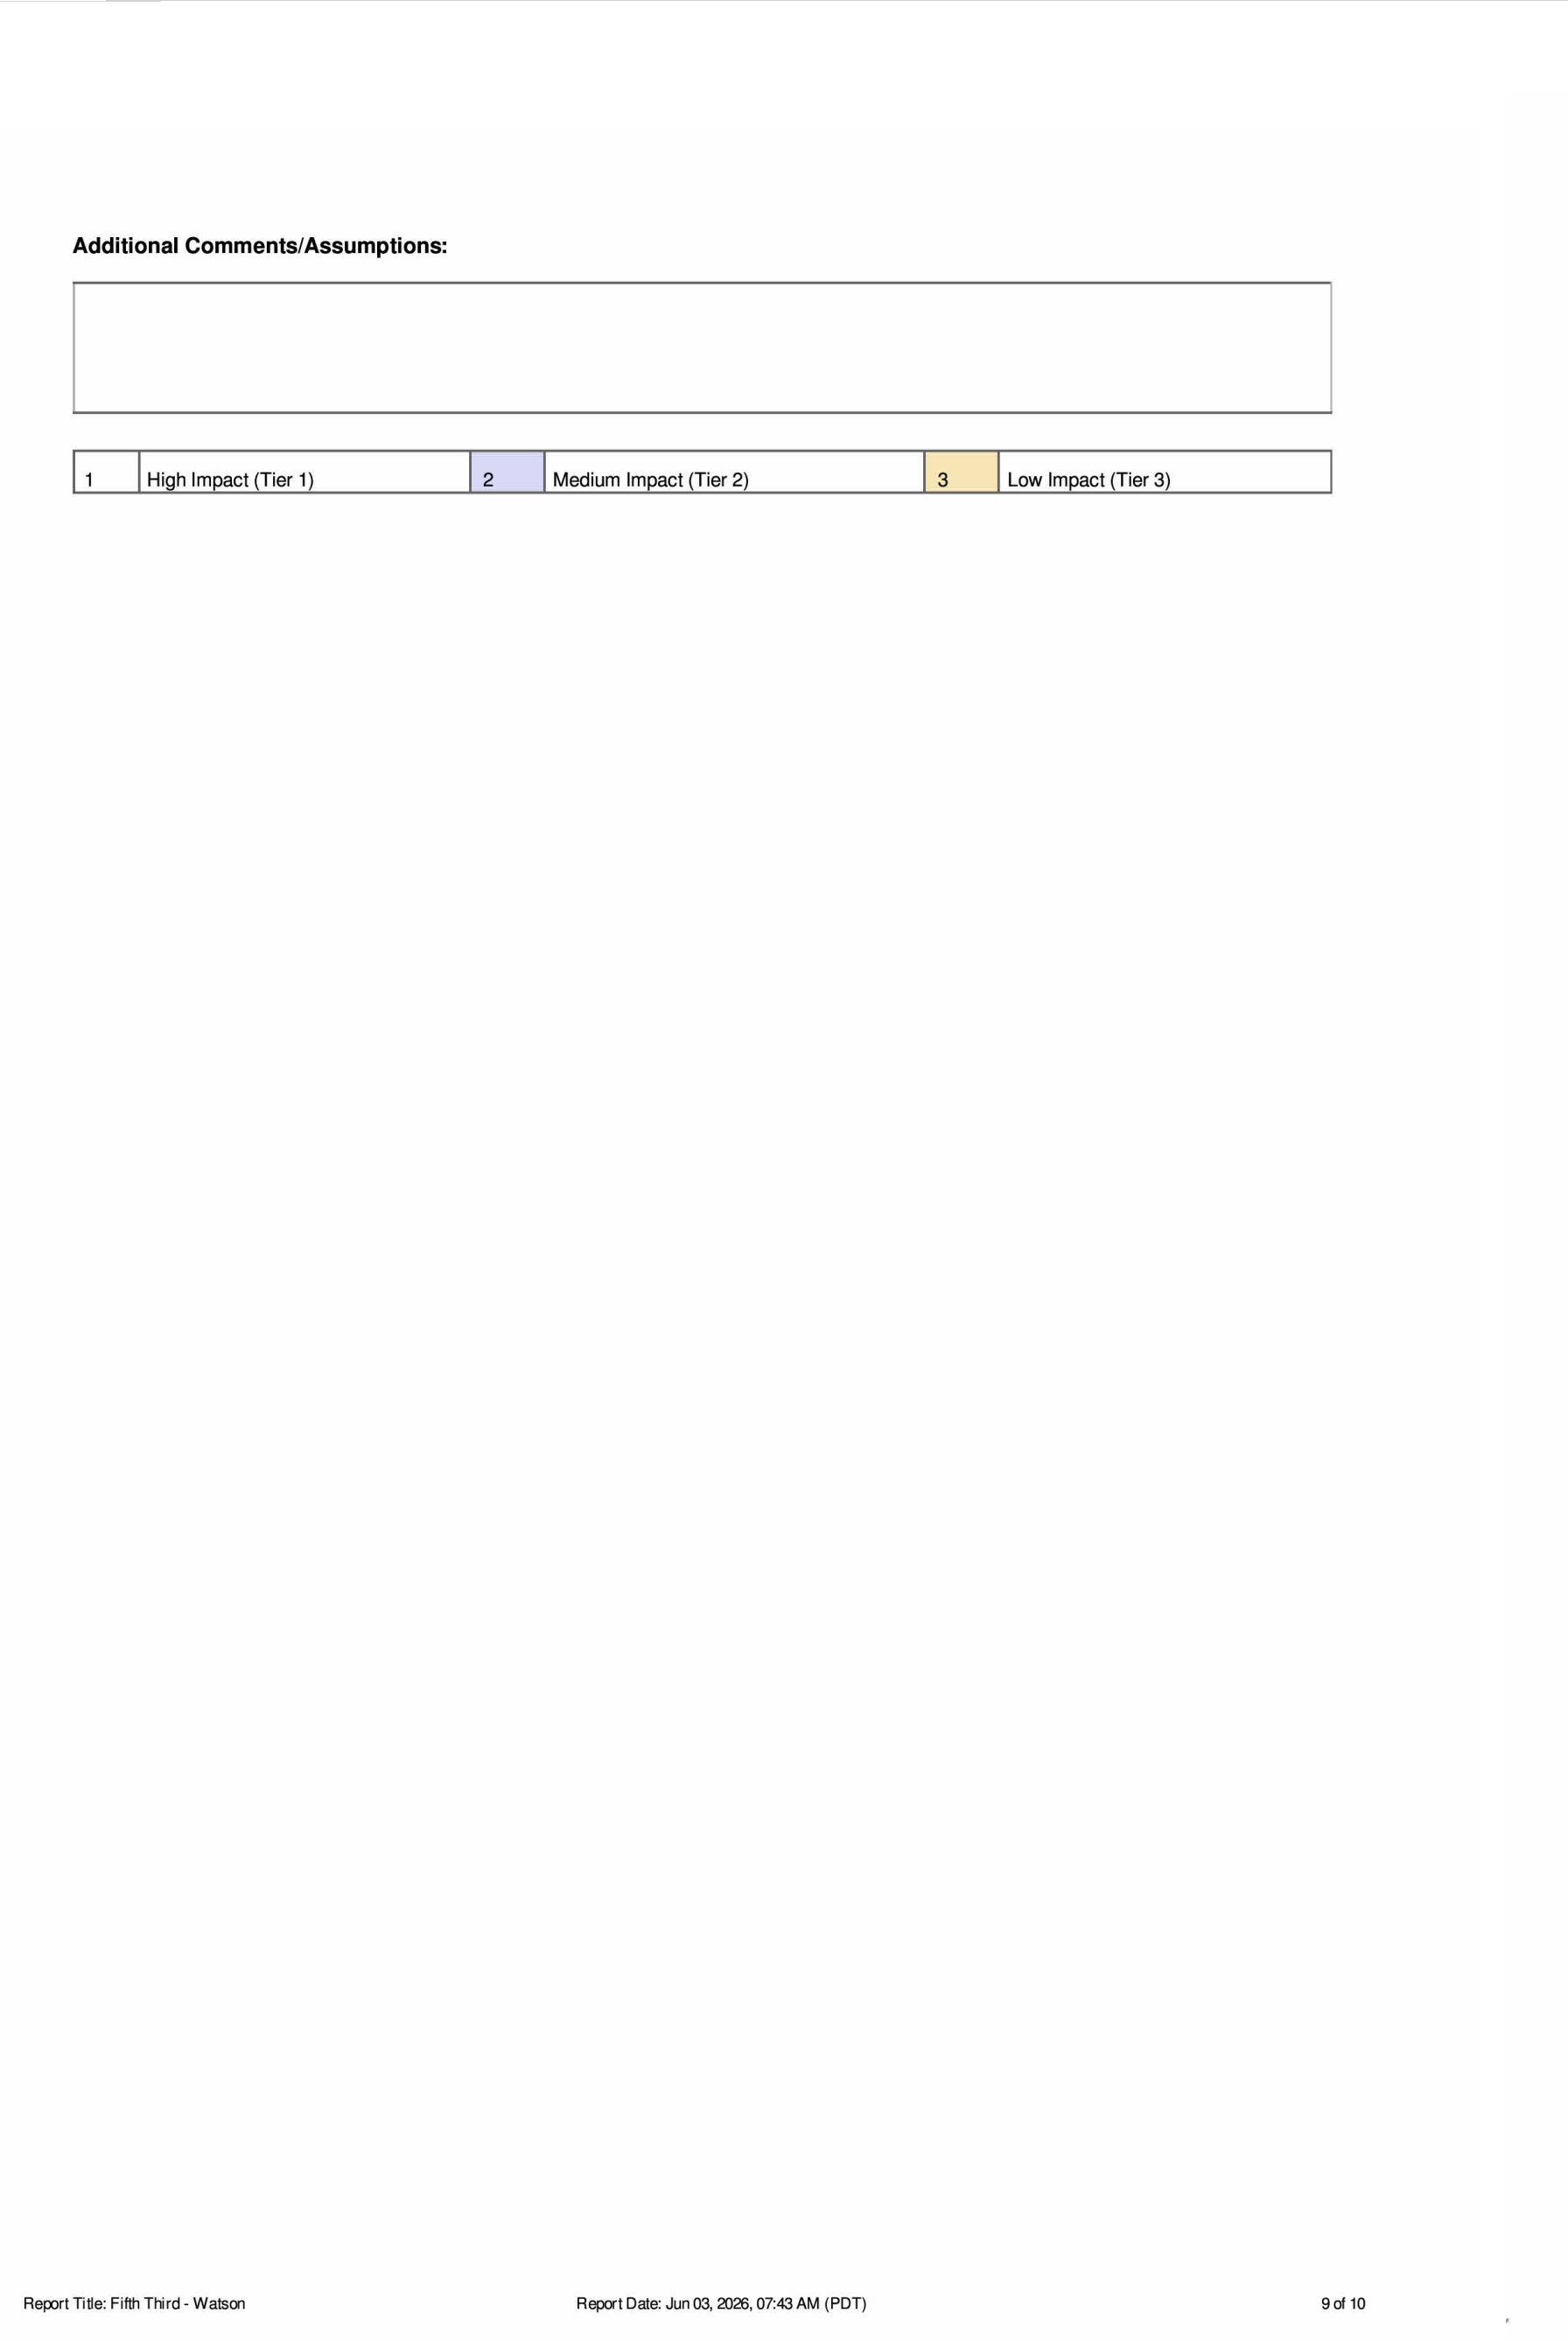

Additional Comments/Assumptions:

1	High Impact (Tier 1)	2	Medium Impact (Tier 2)	3	Low Impact (Tier 3)

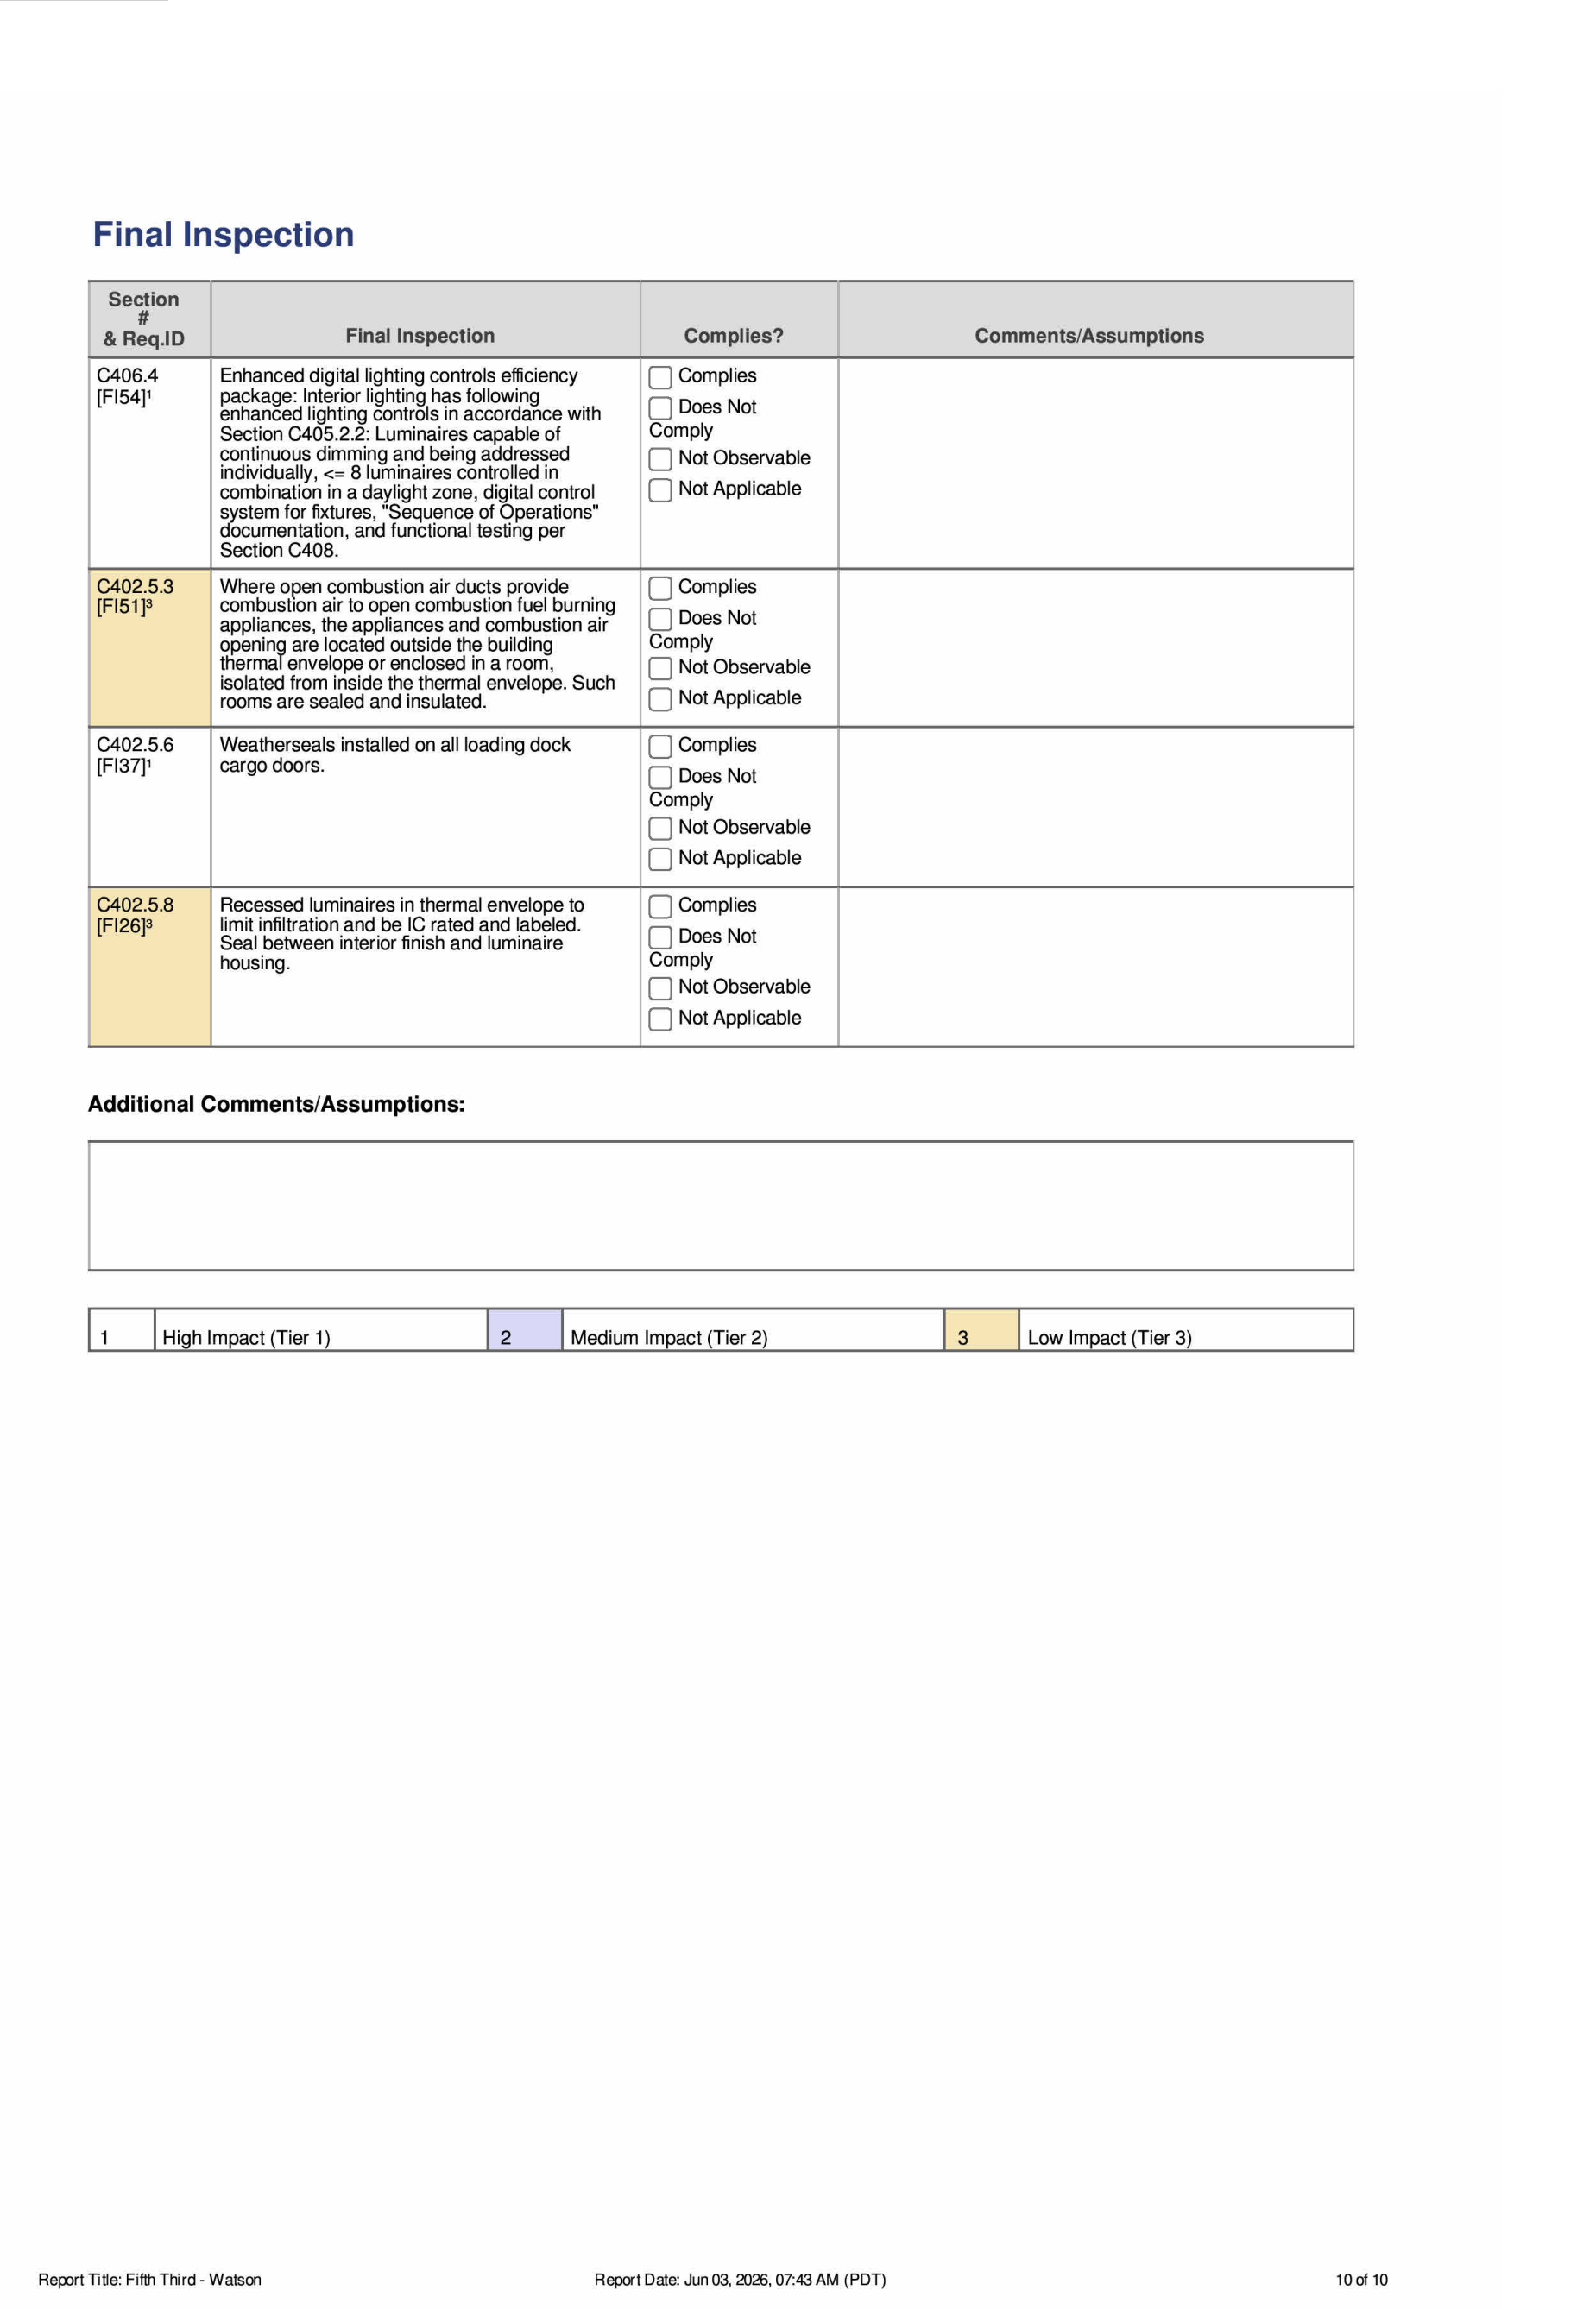

Final Inspection

Section # & Req.ID	Final Inspection	Complies?	Comments/Assumptions
C406.4 [FI54]^{1}	Enhanced digital lighting controls efficiency package: Interior lighting has following enhanced lighting controls in accordance with Section C405.2.2: Luminaires capable of continuous dimming and being addressed individually, <= 8 luminaires controlled in combination in a daylight zone, digital control system for fixtures, "Sequence of Operations" documentation, and functional testing per Section C408.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.5.3 [FI51]^{3}	Where open combustion air ducts provide combustion air to open combustion fuel burning appliances, the appliances and combustion air opening are located outside the building thermal envelope or enclosed in a room, isolated from inside the thermal envelope. Such rooms are sealed and insulated.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.5.6 [FI37]^{1}	Weatherseals installed on all loading dock cargo doors.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
C402.5.8 [FI26]^{3}	Recessed luminaires in thermal envelope to limit infiltration and be IC rated and labeled. Seal between interior finish and luminaire housing.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1	High Impact (Tier 1)	2	Medium Impact (Tier 2)	3	Low Impact (Tier 3)

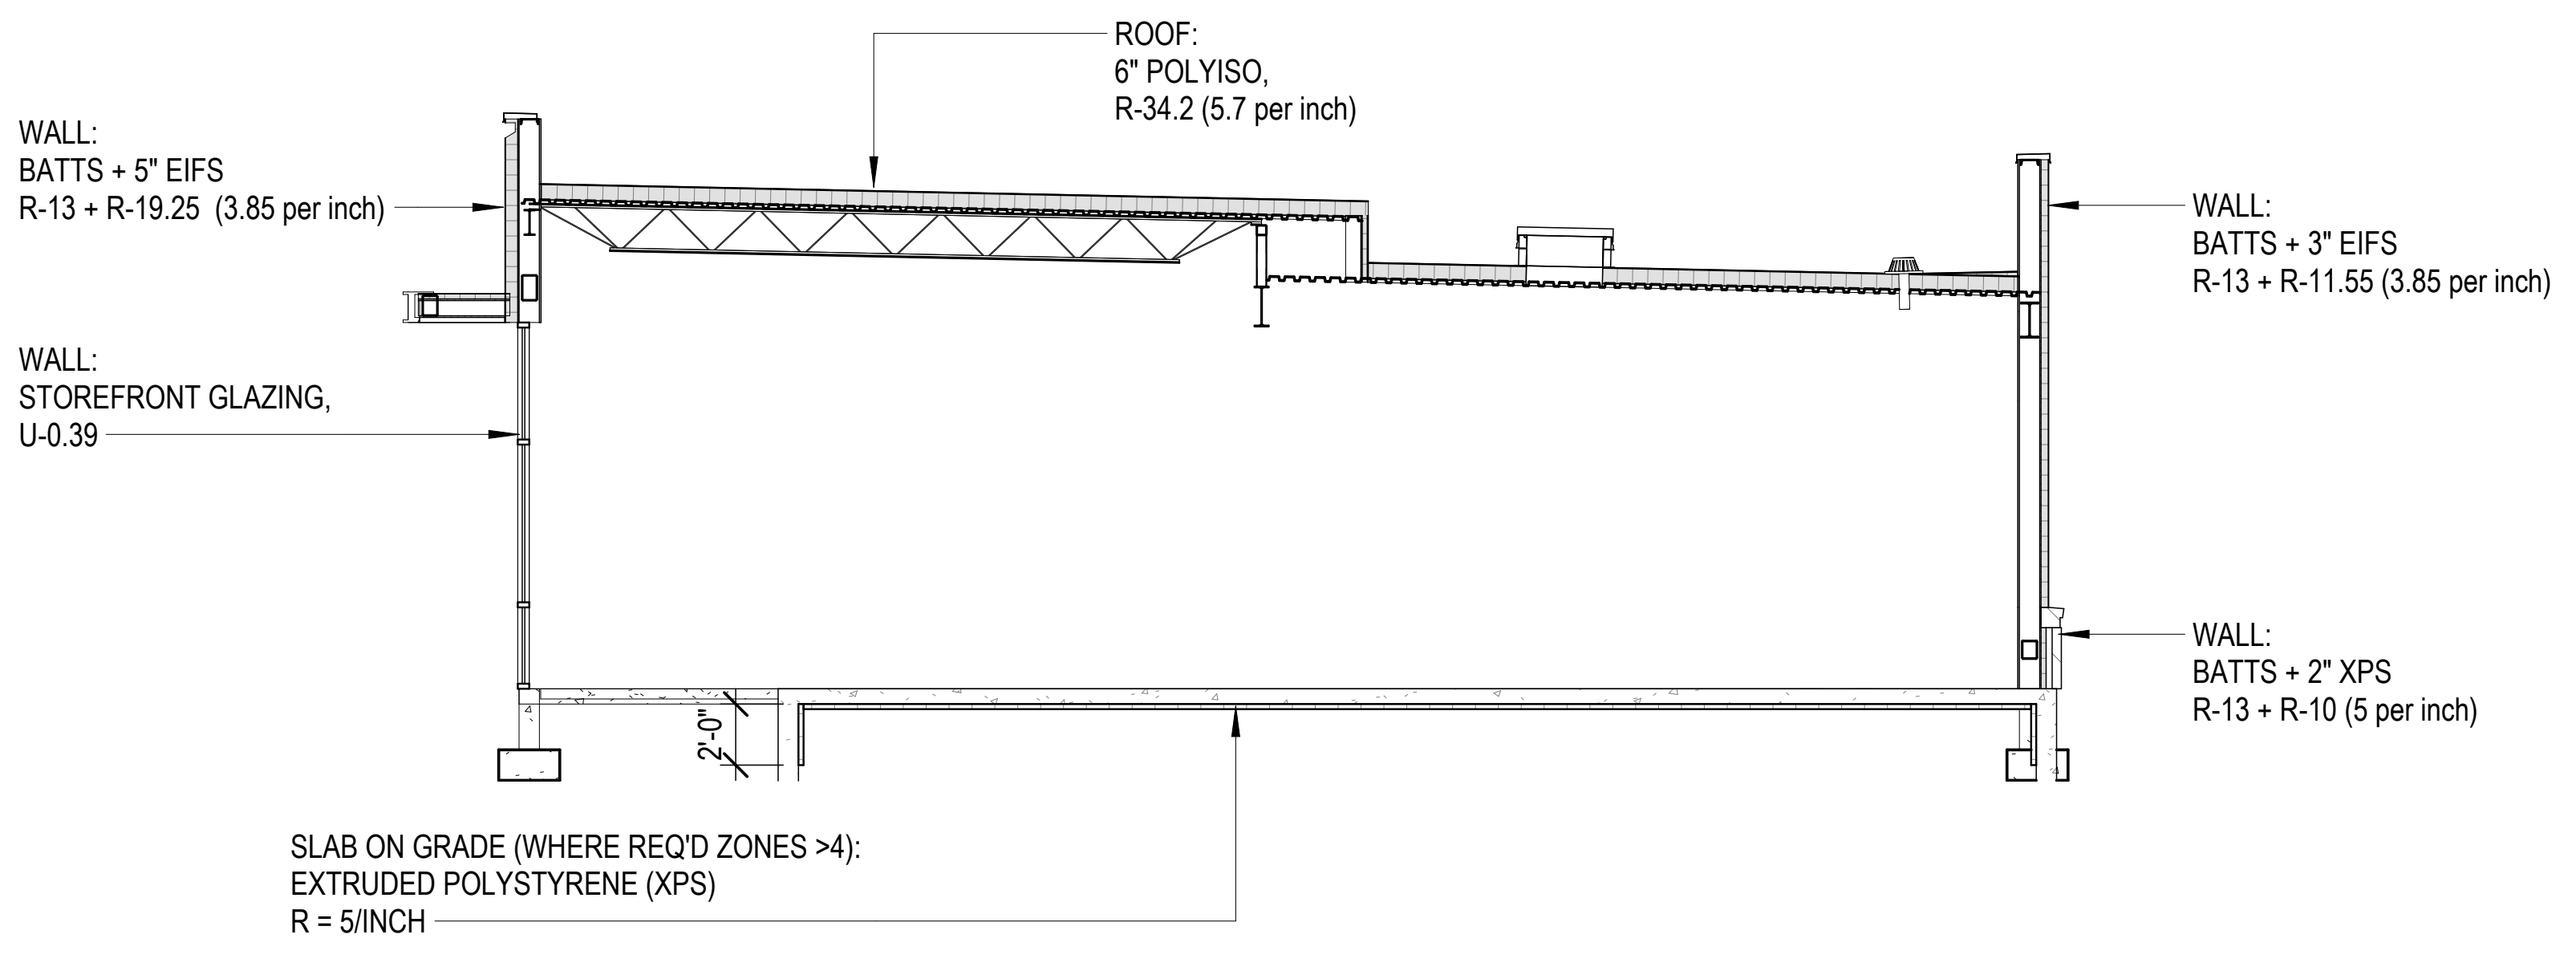

① BUILDING ENVELOPE THERMAL VALUES

1/8" = 1'-0"

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA REGISTERED ARCHITECT
Stuart Romm
STUART M. ROMM
07/02/26
CERTIFICATE NO. 3452

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
COMCHECK

Sheet Number:
G-003

7/8/2026 2:37:40 PM