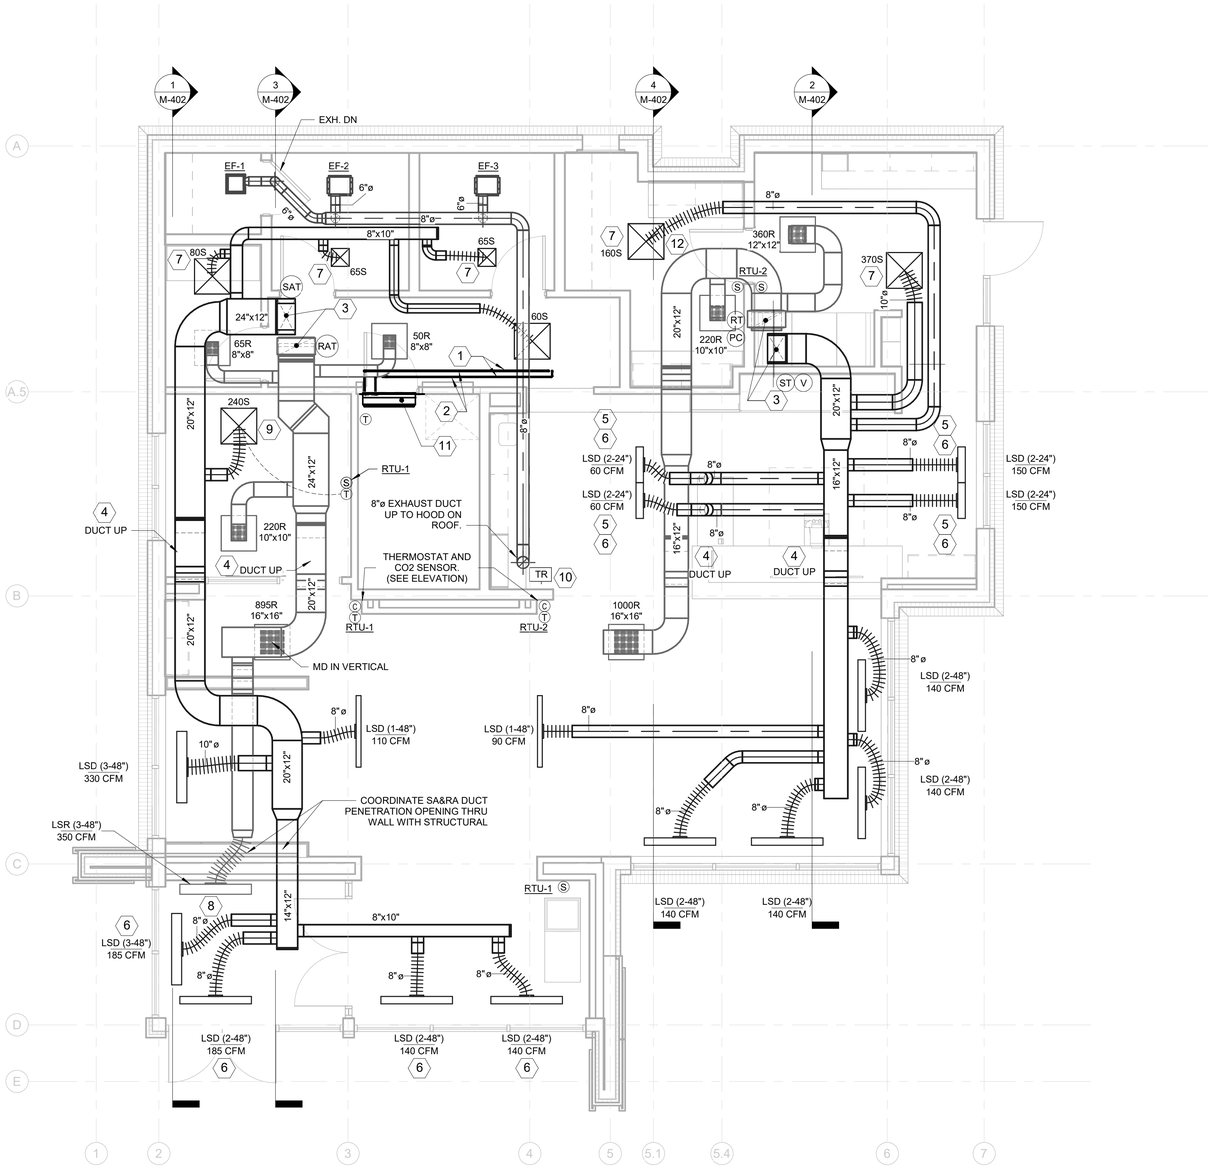


1 M-301 FLOOR PLAN - MECHANICAL
1/4" = 1'-0"

MECHANICAL KEY NOTES
(APPLIES TO THIS SHEET ONLY)

1. REFRIGERANT PIPING UP THRU ROOF TO OUTDOOR UNIT.
2. ROUTE REFRIGERANT PIPING AS HIGH AS POSSIBLE TO OUTDOOR UNIT ON ROOF. ROUTE AND SIZE PER MANUFACTURER'S RECOMMENDATIONS (TYP.).
3. DUCT UP AND TRANSITION TO MATCH FULL UNIT OPENING. PROVIDE FLEXIBLE CONNECTION AT UNIT. INSTALL LONG-RADIUS SWEEP ELBOW AT DUCT DROP WHERE SPACE PERMITS; OTHERWISE, PROVIDE SHORT-RADIUS ELBOW WITH TURNING VANES.
4. DUCT TO RISE ABOVE STRUCTURAL BEAM. COORDINATE WITH STRUCTURAL.
5. IN UPPER CEILING. PAINT BLACK.
6. PROVIDE REMOTE CABLE OPERATED DAMPER IN PLENUM SLOTS WITH OPERATION AT SLOT FACE.
7. PROVIDE REMOTE CABLE OPERATED DAMPER IN CEILING FOR DAMPER OPERATION.
8. LSR(3) WITH FULL SIZE SHEETMETAL PLENUM, 12" HIGH. INSIDE TO BE PAINTED FLAT BLACK. CONNECT TO DUCT TO PLENUM BOX.
9. SUPPLY DIFFUSER TO BE VAV TYPE WITH PETROLEUM BASED WAX CONTROLLED DAMPER. DAMPER SHALL CLOSE TO KEEP SPACE FROM BEING OVERHEATED ONCE ROOM TEMPERATURE IS SATISFIED (72°F ADJUSTABLE). DIFFUSER EQUAL TO PRICE ACUTHERM ST THERMA-FUSER. VAV DIFFUSER SCOPE INTENDED ONLY FOR NORTHERN PROJECTS, PREPARE TO PROVIDE BID CREDIT WHERE SCOPE IS REMOVED IN SOUTHERN PROJECTS.
10. TEMPERATURE, CO2, AND RELATIVE HUMIDITY DISPLAY EQUAL TO AUTOMATION COMPONENTS, INC. COORDINATE WITH IOT. SEE CONTROL SEQUENCE.
11. INSTALL WALL MOUNTED FAN COIL UNIT AT AN ELEVATION HEIGHT OF 8'-0" FROM FINISHED FLOOR TO BOTTOM OF UNIT.
12. INSTALL TITUS SB STEEL SECTORIZING BAFFLE IN NECK OF SUPPLY DIFFUSER SUCH THAT IT BLOCKS THE AIRFLOW FROM DIRECTLY BLOWING ONTO THE NIGHT DROP BOX.

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED 032221 PROFESSIONAL ENGINEER GARRY M. JENKINS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
MECHANICAL PROPOSED CEILING PLAN

Sheet Number:
M-301

6/30/2026 4:54:57 PM