



ADJUSTABLE STEEL CLEVIS ALL SIZES




ADJUSTABLE SWIVEL PIPE RING, SPLIT RING 2" AND SMALL



ADJUSTABLE STEEL BAND HANGER, 2" AND SMALLER

PIPE SIZE	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	6"	8"	10"
ROD DIAMTER	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	1/2"	1/2"	5/8"	3/4"	7/8"	7/8"
SPACING	6'	8'	8'	8'	10'	10'	10'	10'	10'	10'	10'	10'

1 M-502 PIPE HANGER DETAIL
NOT TO SCALE

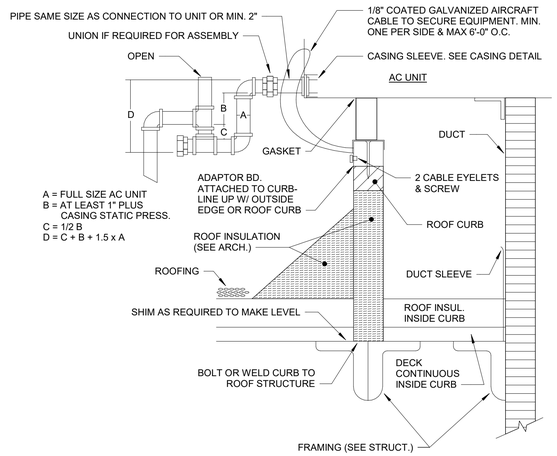


2 M-502 ROOFTOP AC UNIT DETAIL
NOT TO SCALE



1. DIMENSIONS: 4.8"WX5.3"HX1.6"
2. WEIGHT: 0.35 LB.
3. OPERATING VOLTAGE: 20-29 VDC
4. POWER REQUIREMENTS:
   A. STANDBY: 3.0 MA MAX.
   B. TROUBLE: 16.0 MA MAX.
   C. ALARM WITHOUT STROBE:30 MA MAX.
   D. ALARM WITH STROBE: 55MA MAX.
5. STRIP TERMINAL: 14AWG TO 22 AWG WIRE
6. WIRING DISTANCE: 1000 FEET FROM DUCT SMOKE DETECTOR
7. SOUNDER: 85 dBA AT TEN FEET
8. TEMPERATURE: 14 DEGREE F TO 140 DEGREE F
9. HUMIDITY: 95% RELATIVE HUMIDITY; NON-CONDENSING.
10. LISTING: UL268 AND ULC S529-02
11. STANDBY(GREEN BLINK), TROUBLE(AMBER), MAINTENANCE(AMBER BLINK) AND ALARM(RED) LEDS TO INDICATE DETECTOR STATUS
12. KEYSWITCH TO SELECT DESIRED SENSOR, ENABLE TEST/RESET BUTTON

PROVIDE WIRING AS RECOMMENDED BY EQUIPMENT MANUFACTURER

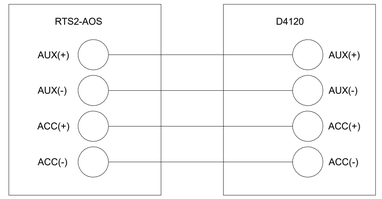

3 M-502 CONVENTIONAL MULTI-SIGNALLING ACCESSORY DETAIL
12" = 1'-0"

CONDENSER UNIT HOLD DOWN (175 MPH WIND)

A. ALL NEW CONDENSING UNITS SHALL BE PROVIDED WITH HIGH WIND PROTECTION, FOR A MINIMUM WIND VELOCITY OF 175 MPH, AS ACCEPTED FOR SOUTH FLORIDA (MIAMI DADE, BROWARD, AND PALM BEACH COUNTIES).

B. CONDENSER ANCHORING CALCULATIONS ARE BASED ON ASCE 7-16 AND THE FBC CHAPTER 16.

C. CONDENSERS SHALL BE MOUNTED ON APPROVED EQUIPMENT SUPPORT RAILS, EQUAL TO PATE MODEL ES-1. RAILS SHALL BE A MINIMUM OF 3.5" TALL, AND NOT HIGHER THAN 6" TALL. CONTRACTOR HAS THE OPTION TO USE THE PATE MODEL ES-2.

D. RAILS SHALL BE A MINIMUM OF 18 GAUGE GALVANIZED STEEL, UNITIZED CONSTRUCTION WITH INTEGRAL BASE PLATE, CONTINUOUS WELDED CORNER SEAMS, PRESSURE TREATED WOOD NAILER, COUNTER FLASHING WITH SCREWS.

E. THE RAILS SHALL BE A MINIMUM OF TWO ROOF TRUSSES.

F. THE RAILS SHALL BE ANCHORED TO THE ROOF SUPPORT TRUSSES WITH MINIMUM 3/8" ANCHOR BOLT. 3/8"∅ LAG SCREWS MAY BE USED TO ANCHOR DIRECTLY INTO THE TRUSS AT CENTERLINE OF TRUSS.


G. A MINIMUM OF TWO RAILS ARE REQUIRED TO SUPPORT A CONDENSER. MULTIPLE CONDENSERS CAN BE PLACED ON A SINGLE PAIRED RAIL SYSTEM WHERE THE RAILS SPAN MORE THAN TWO ROOF TRUSS.

H. WHERE REQUIRED, CROSS SUPPORTS THAT MAY BE REQUIRED TO SPAN THE TOP OF THE RAILS TO SUPPORT THE CONDENSING UNITS SHALL BE EQUAL TO UNIOSTRUCT P1001.

I. CONTRACTOR TO FOLLOW THE INSTALLATION GUIDELINES OF THE CONDENSER MANUFACTURER AND THE RAIL MANUFACTURER.


J. ALL ROOF PENETRATIONS SHALL BE SEALED WATER TIGHT.

K. RAILS TO BE FLASHED WATERTIGHT BY ROOFING CONTRACTOR.

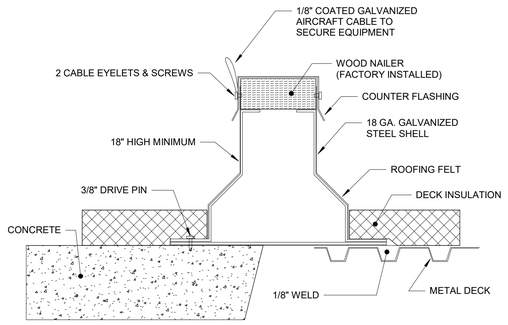


4 M-502 EQUIPMENT ROOF SUPPORT DETAIL
NOT TO SCALE


SAMPLING TUBES RECOMMENDED FOR DIFFERENT DUCT WIDTHS	
OUTSIDE DUCT WIDTH	SAMPLING TUBE RECOMMENDED
UP TO 1 FT.	DST1
1 TO 2 FT.	DST1.5
2 TO 4 FT.	DST3
4 TO 8 FT.	DST5
8 TO 12 FT.	DST10(2 PIECE)



5 M-502 TYPICAL HVAC SMOKE DETECTOR DETAIL
NTS

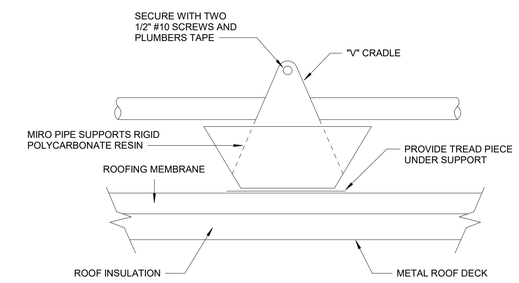

6 M-502 PIPING ROOF SUPPORT DETAIL
NTS

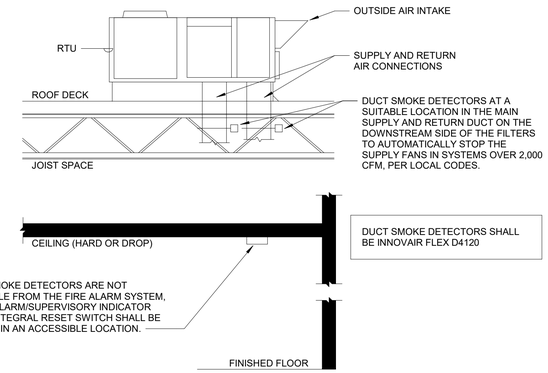

7 M-502 HVAC DUCT SMOKE DETECTOR DETAIL
NTS

6/30/2026 4:55:04 PM

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED 032221 PROFESSIONAL ENGINEER GARRY M. JENKINS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:

FIFTH THIRD BANK

Project Number: 26032
Project Name:

FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:

MECHANICAL DETAILS AND CONTROLS

Sheet Number:

M-502