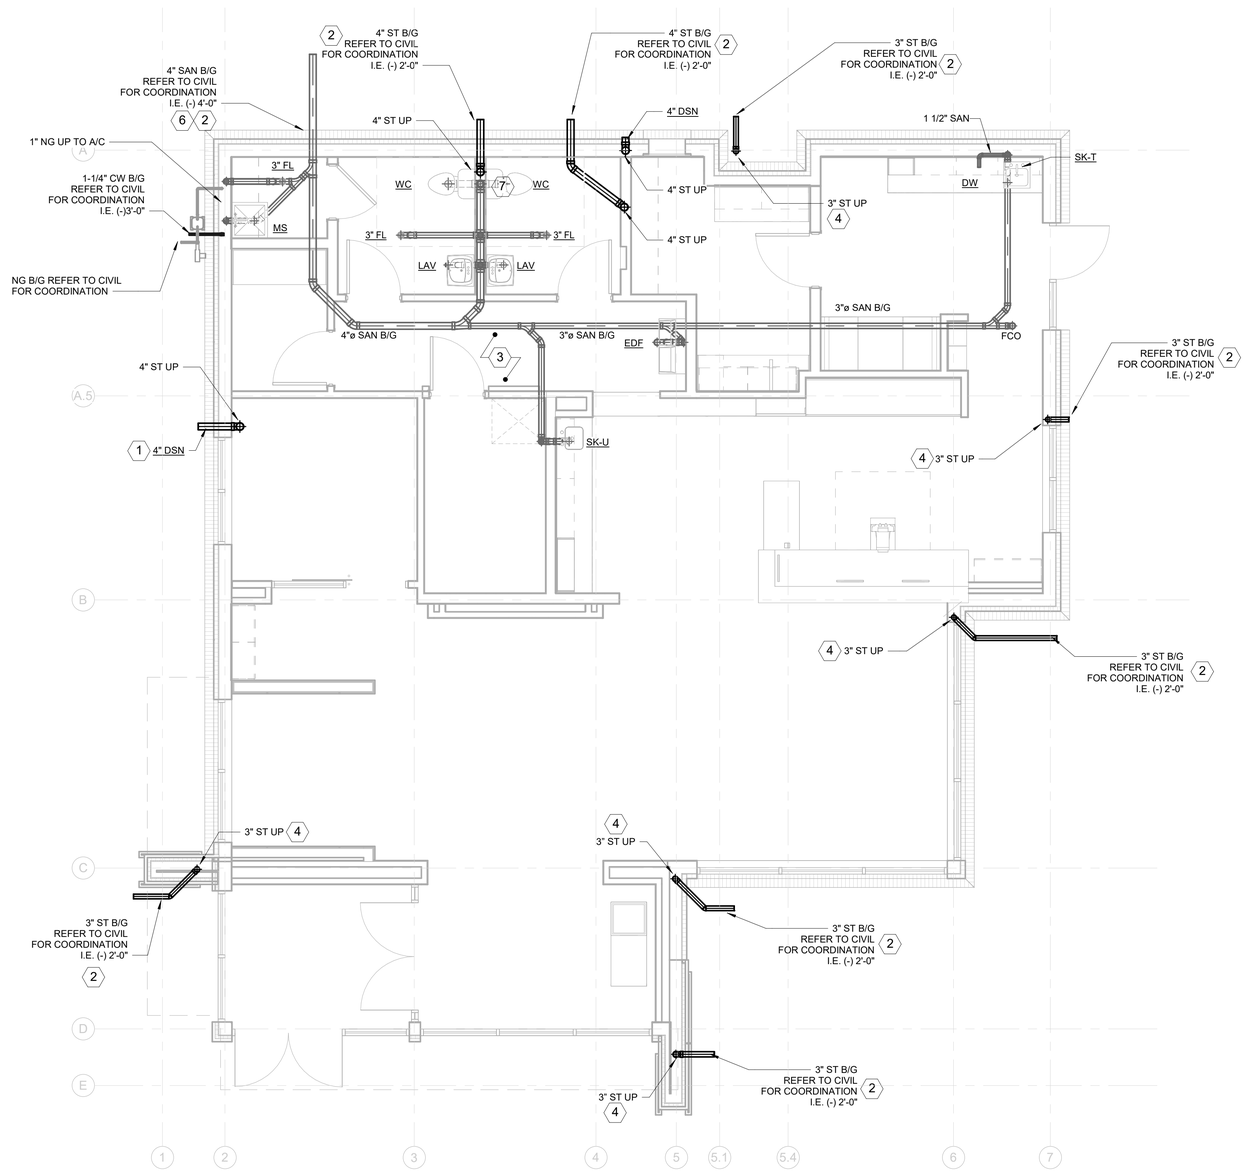


1 PLUMBING PROPOSED FOUNDATION PLAN
P-301 1/4" = 1'-0"

MECHANICAL GENERAL NOTES
(APPLIES TO THIS SHEET ONLY)

1. LOCATIONS OF UTILITIES SHOWN ON PLANS ARE APPROXIMATE, VERIFY WITH LOCAL UTILITY PRIOR TO BIDDING.
2. CONTRACTOR SHALL VERIFY EXACT LOCATION, SIZE AND ELEVATION OF ALL EXISTING SERVICES PRIOR TO INSTALLING ANY NEW PIPE.
3. ALL OUTSIDE CLEANOUTS SHALL BE BROUGHT TO GRADE AND EMBEDDED\ IN 18"X18"X6" THICK CONCRETE PAD. (J.R. SMITH 4258 OR EQUAL.)
4. WHEREVER DISSIMILAR METALS ARE CONNECTED ON WATER LINES, A DIELECTRIC UNION SHALL BE USED.
5. ALL HORIZONTAL WATER AND VENT PIPING SHALL BE RUN ABOVE CEILING ON PLAN WHICH SHOWN UNLESS OTHERWISE NOTED.
6. ALL HORIZONTAL SANITARY PIPING IS RUN BELOW FLOOR ON PLAN WHERE SHOWN UNLESS OTHERWISE NOTED.
7. ALL WATER PIPING BELOW SLAB ON GRADE SHALL BE BENT UP AT ENDS SO THAT NO JOINTS OCCUR BELOW FLOOR.
8. COORDINATE ALL PIPE ROUTING TO AVOID CONFLICTS WITH STRUCTURAL, MECHANICAL, AND ELECTRICAL FEATURES OF BUILDING.
9. ALL WALL HYDRANTS AND HOSE BIBBS SHALL BE MOUNTED 24" ABOVE FINISH GRADE OR FINISH FLOOR UNLESS OTHERWISE NOTED.
10. ALL WATER PIPING INSTALLED IN EXTERIOR WALLS SHALL BE LOCATED ON THE INTERIOR SIDE OF THE EXTERIOR WALL INSULATION.
11. NO VENT THRU ROOF IS TO BE LOCATED WITHIN 10 FEET OF ANY BUILDING AIR INTAKES, PER CODE. COORDINATE WITH MECHANICAL AND GENERAL CONTRACTORS.
12. DOMESTIC WATER PIPING AND FIRE PROTECTION PIPING LOCATED ABOVE THE CEILING, SHALL BE INSTALLED BELOW CEILING INSULATION.
13. CONTRACTOR SHALL COORDINATE MECHANICAL FLOOR DRAIN LOCATIONS WITH MECHANICAL EQUIPMENT PRIOR TO INSTALLATION.
14. CONTRACTOR SHALL PROVIDE SHOCK ARRESTORS ON ALL BRANCH LINES.
15. CONTRACTOR SHALL COORDINATE ALL SINKS WITH CASEWORK PRIOR TO ORDERING SINKS.
16. ALL HOT WATER LINES TO BE INSULATED.

MECHANICAL KEY NOTES
(APPLIES TO THIS SHEET ONLY)

1. TERMINATE EMERGENCY DOWNSPOUT 12" ABOVE FINISH CURB. COORDINATE WITH ARCHITECT.
2. FOR CONTINUATION SEE CIVIL SITE UTILITY PLAN.
3. ALL UNDERGROUND SANITARY LINES ARE TO BE NO LESS THAN 3" IN SIZE.
4. VERTICAL STORM RISER TO DROP UNDERGROUND AND ROUTE OUT BUILDING AS INDICATED.
5. PIPE SHALL BE INSTALLED WITH A HORIZONTAL INTERCEPTING TRAP UNDERNEATH EXTERNAL WALL. CLEANOUT TO BE LEFT AS AN AIR INLET.
6. REFER TO CIVIL DRAWINGS FOR PROPOSED EXTERIOR CLEANOUT LOCATION, COORDINATE TO AVOID SIDEWALK PATH OR TRANSFORMER PAD.
7. PLUMBING CONTRACTOR TO ENSURE THAT A "DOUBLE COMBO WYE" FITTING IS USED AT THE LOW FLOW WATER CLOSET CONNECTION TO SANITARY MAIN IN AN EFFORT TO IMPROVE WASTE FLOW.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED 032221 PROFESSIONAL ENGINEER GARRY M. JENKINS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON 1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
PLUMBING SANITARY FOUNDATION PLAN

Sheet Number:
P-301

6/30/2026 4:55:10 PM