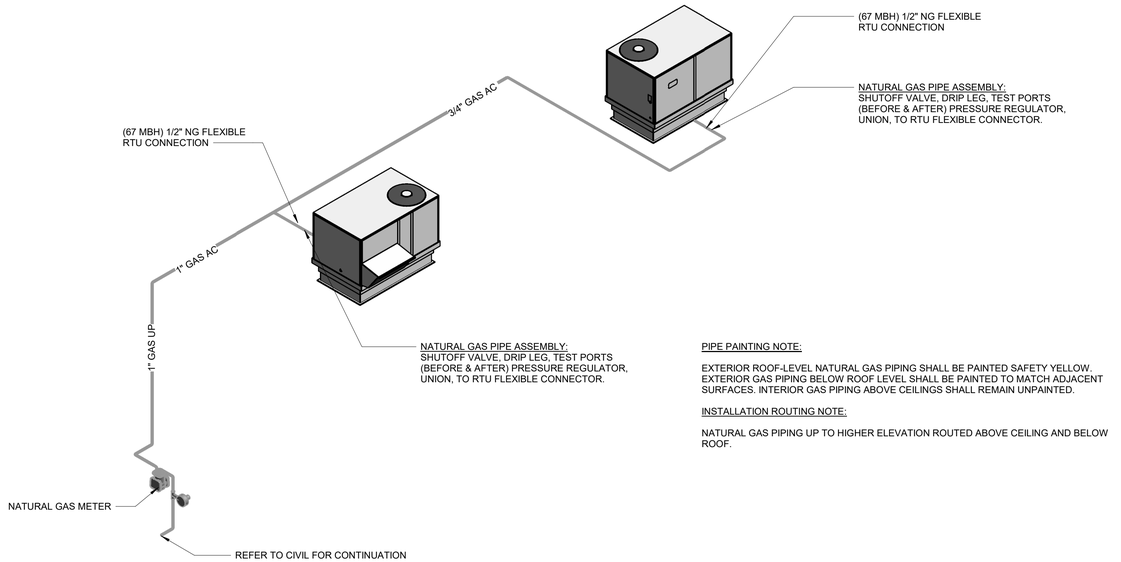



PIPE PAINTING NOTE:


EXTERIOR ROOF-LEVEL NATURAL GAS PIPING SHALL BE PAINTED SAFETY YELLOW. EXTERIOR GAS PIPING BELOW ROOF LEVEL SHALL BE PAINTED TO MATCH ADJACENT SURFACES. INTERIOR GAS PIPING ABOVE CEILINGS SHALL REMAIN UNPAINTED.

INSTALLATION ROUTING NOTE:

NATURAL GAS PIPING UP TO HIGHER ELEVATION ROUTED ABOVE CEILING AND BELOW ROOF.

1 P-403 PLUMBING NATURAL GAS ISO PLAN

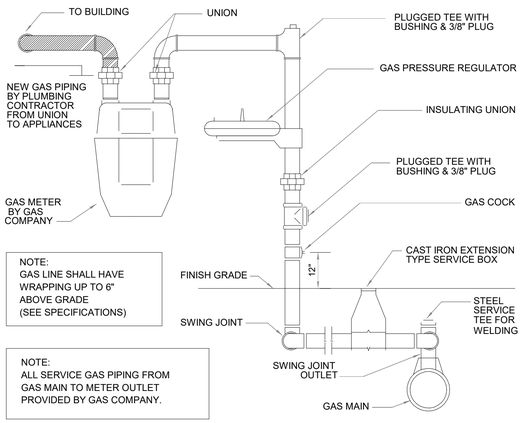

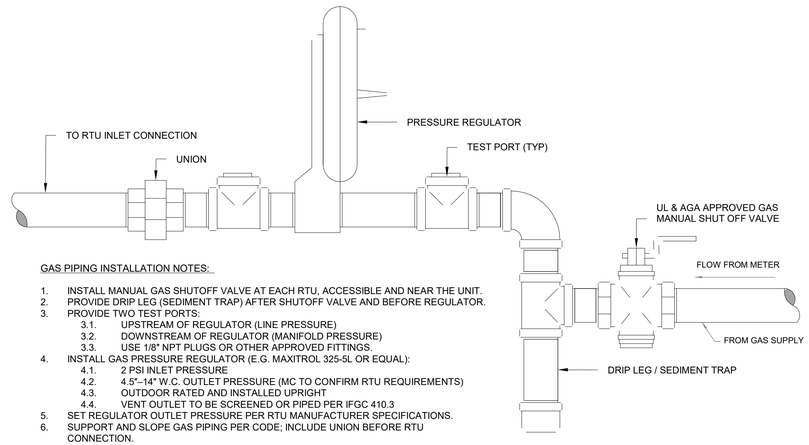

GAS PIPING INSTALLATION NOTES:

1. INSTALL MANUAL GAS SHUTOFF VALVE AT EACH RTU, ACCESSIBLE AND NEAR THE UNIT.
2. PROVIDE DRIP LEG (SEDIMENT TRAP) AFTER SHUTOFF VALVE AND BEFORE REGULATOR.
3. PROVIDE TWO TEST PORTS:
   - 3.1. UPSTREAM OF REGULATOR (LINE PRESSURE)
   - 3.2. DOWNSTREAM OF REGULATOR (MANIFOLD PRESSURE)
   - 3.3. USE 1/8" NPT PLUGS OR OTHER APPROVED FITTINGS.
4. INSTALL GAS PRESSURE REGULATOR (E.G. MAXITROL 325-5L OR EQUAL):
   - 4.1. 2 PSI INLET PRESSURE
   - 4.2. 4.5"–14" W.C. OUTLET PRESSURE (MC TO CONFIRM RTU REQUIREMENTS)
   - 4.3. OUTDOOR RATED AND INSTALLED UPRIGHT
   - 4.4. VENT OUTLET TO BE SCREENED OR PIPED PER IFGC 410.3
5. SET REGULATOR OUTLET PRESSURE PER RTU MANUFACTURER SPECIFICATIONS.
6. SUPPORT AND SLOPE GAS PIPING PER CODE; INCLUDE UNION BEFORE RTU CONNECTION.

PIPE PAINTING NOTE:

EXTERIOR ROOF-LEVEL NATURAL GAS PIPING SHALL BE PAINTED SAFETY YELLOW. EXTERIOR GAS PIPING BELOW ROOF LEVEL SHALL BE PAINTED TO MATCH ADJACENT SURFACES. INTERIOR GAS PIPING ABOVE CEILINGS SHALL REMAIN UNPAINTED.

INSTALLATION ROUTING NOTE:

NATURAL GAS PIPE UP TO HIGHER ELEVATION ROUTED ABOVE CEILING AND BELOW ROOF.

NATURAL GAS PIPING CALCULATIONS AND NOTES:

1. NATURAL GAS PIPING SHALL BE SCHEDULED 40 BLACK STEEL COMPLYING WITH ANSI B35.10. FITTINGS SHALL BE STEEL OR MALLEABLE IRON. JOINTS SHALL BE THREADED OR WELDED.
2. CONTRACTOR SHALL BE RESPONSIBLE FOR CONTACTING AND COORDINATING WITH THE LOCAL UTILITY COMPANIES (GAS, WATER, SEWER, ELECTRICAL, TELEPHONE) TO ENSURE TIMELY INSTALLATION OF UTILITY SERVICES TO THE POINTS SHOWN ON THE PLANS.
3. REFER TO THE ARCHITECTURAL PLANS FOR LOCATIONS OF ALL FIXTURES AND EQUIPMENT. PROVIDE ALL FINAL CONNECTIONS PER KITCHEN CONSULTANT SCHEDULES.
4. ALL GAS PIPING IN SCOPE (NEW AND EXISTING) SHALL BE PRESSURE TESTED PRIOR TO BUILDING OCCUPANCY.
5. EXISTING GAS PIPING SIZE VERIFIED USING TABLE 402.4(5) OF THE INTERNATIONAL FUEL GAS CODE USING THE LONGEST LENGTH METHOD 402.4.1 USING THE FOLLOWING INFORMATION:
   - INLET PRESSURE OF 2.0 PSI
   - PRESSURE DROP OF 1.0 IN. W.C. FOR SCHEDULE 40 METALLIC PIPE
   - MAXIMUM DEVELOPED LENGTH OF 100 FT.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

GEORGIA REGISTERED 032221 PROFESSIONAL ENGINEER GARRY M. JENKINS

Copyright (c) 2024 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26032
Project Name:
FIFTH THIRD BANK WATSON
1,900 SF

2711 WATSON BOULEVARD
WARNER ROBBINS, GA 31093

Key Plan:

Sheet Title:
PLUMBING NATURAL GAS ISO PLAN

Sheet Number:
P-403

6/30/2026 4:55:14 PM