: INDICATES TO SLOPE SLAB. SEE ARCHITECTURAL FOR AMOUNT OF SLOPE AND EXACT LOCATION.

[0'-0"] INDICATES ELEVATION OF FINISH FLOOR SLAB. SEE CIVIL DRAWINGS FOR DATUM.

[ ]: NUMBER INSIDE OF BRACKETS INDICATES TOP OF FOOTING ELEVATION

INDICATES A STEP IN FOOTING. SEE GENERAL NOTES FOR CRITERIA. SEE DETAIL 5 / S-680

S.C.J. : INDICATES A SAW-CUT JOINT IN THE SLAB ON GRADE. SEE TYPICAL SAW-CUT JOINT DETAIL 3 / S-680

C.J. : INDICATES A CONSTRUCTION JOINT. USE 24 GAUGE KEYED TYPE. DISCONTINUE MESH AT JOINT. SEE TYPICAL CONTROL JOINT DETAIL AND SPECIFICATIONS. SEE DETAIL 2 / S-680

R.B.: INDICATES TO PROVIDE 2#4 X 3'-0" LONG. CENTER AT INTERSECTION OF DUMMY JOINT WHERE JOINT IS NOT CONTINUOUS NOR ALIGNED. PLACE 1 BAR 1" CLEAR TOP, AND A SECOND BAR 3" CLEAR TOP OF SLAB.

NOTE: ALL ELEVATIONS SHOWN ARE TOP OF FOOTING ELEVATION.

NOTE: SEE TYPICAL DETAIL AT BASE OF STEEL COLUMNS. WHERE CONCRETE PIERS ARE NOT SPECIFICALLY DETAILED, PROVIDE A PIER AS NOTED ON DETAIL.

FOUNDATION PLAN NOTES

NOTE: UNLESS NOTED OTHERWISE ON PLANS, TOP OF FOOTINGS AT ALL INTERIOR FOOTINGS SHALL BE [-2'-0"] BELOW FINISH FLOOR SLAB.

NOTE: MAXIMUM SPACING OF VERTICAL CONTROL JOINTS IN EXTERIOR MASONRY VENEER IS 16'-0" FROM CORNERS AND 32'-0" FOR INTERMEDIATE VERTICAL JOINTS. SEE ARCHITECT FOR EXACT LOCATIONS.


NOTE: FOR ISOLATION JOINT AT COLUMN BASES, SEE TYPICAL DETAIL: 8 / S-680

NOTE: MAXIMUM EARTH DIFFERENTIAL WHEN BACKFILLING SHOULD NOT EXCEED 2'-0"

NOTE: SLABS-ON-GRADE REQUIRE CONTROL JOINTS PER THE TYPICAL DETAILS UNLESS NOTED OTHERWISE. LOCATE CONSTRUCTION AND CONTROL JOINTS IN SUCH A WAY TO MINIMIZE THE EFFECTS OF SHRINKAGE AND CURLING OF THE CONCRETE SLAB SECTIONS. SUBMIT TO THE ARCHITECT/ENGINEER/EQUIPMENT VENDOR THE SEQUENCE AND METHOD OF CASTING CONCRETE SLABS-ON-GRADE PRIOR TO PLACING THESE ELEMENTS. JOINT SPACING SHALL NOT EXCEED **12'-6"**, AND THE RESULTING PLAN ASPECT RATIO (PANEL LENGTH TO PANEL WIDTH) OF ANY GIVEN SECTION OF SLAB SHALL NOT EXCEED **1.5**. WHERE POSSIBLE, CONTROL JOINT LAYOUT SHALL BE SUCH THAT JOINTS ALIGN WITH THE VERTICES OF COLUMN ISOLATION BLOCKOUTS AND SHALL BE ARRANGED IN A GENERALLY ORTHOGONAL MANNER.

NOTE: GENERAL CONTRACTOR SHALL ENGAGE A SURVEYOR TO PROVIDE LOCATIONS OF ALL EXISTING UTILITES, TRENCHES, ETC. TO ENSURE THAT NEW FOUNDATIONS WILL NOT INTERFERE, UNDERMINE, OR BEAR ON EXISTING UTILITIES.

NOTE: CONTRACTOR SHALL COORDINATE EXACT LOCATIONS OF ALL FLOOR JOINTS AND DUMMY JOINTS WITH THE ARCHITECTURAL JOINTS IN FINISHES. ALL FLOOR JOINTS SHOULD COINCIDE DIRECTLY UNDER A JOINT IN THE ARCHITECTURAL FINISH ABOVE. SEE ARCHITECTURAL DRAWINGS.



FOOTING KEY

NOTE: UNLESS NOTED OTHERWISE ON PLANS, TOP OF FOOTINGS AT ALL EXTERIOR FOOTINGS SHALL BE [-2'-0"] BELOW FINISH FLOOR SLAB.

STEEL COLUMN SCHEDULE

High Roof											High Roof
16' - 0" Low Roof											16' - 0" Low Roof
13' - 0" Level 1	HSS7X7X1/2	HSS6X6X3/8	HSS5X5X3/8	HSS6X6X3/8	HSS6X6X3/8	HSS6X6X1/2	HSS7X7X1/2	HSS6X6X3/8	HSS5X5X3/8	HSS6X6X1/4	13' - 0" Level 1
0' - 0"											0' - 0"
Column Locations	A-1, A.5-1, B-1, C-2	A-2.6, A-4, A.5-6	A-2.9	A-6, B-2	B-4	B-6	C-3	C-6, D-6, E-3	C-7	D-5	

SLAB AND DECK SCHEDULE


MARK	DESCRIPTION
RD-1.5	DECK: 1-1/2" WIDE RIB TYPE B GAUGE: 22 (t = 0.0295") FINISH: GALVANIZED (G90) GRADE: 50 ksi FASTENER TYPE AT SUPPORT: 5/8" Ø PUDDLE WELDS WITH WELDING WASHERS END SUPPORT ATTACHMENT PATTERN: 36/4 INTERMEDIATE SUPPORT ATTACHMENT PATTERN: 36/4 PERIMETER SUPPORT ATTACHMENT PATTERN: 12" o.c. MAX. SIDE LAP FASTENER: #10 TEK SCREWS @ 18" o.c. MAX. MINIMUM END LAP = 4" (AT SUPPORTS ONLY)
SOG-4	4" CONCRETE SLAB ON A VAPOR RETARDER ON A GRAVEL BED OR SAND CUSHION AS RECOMMENDED BY THE GEOTECHNICAL REPORT. REINFORCE SLAB WITH WELDED WIRE FABRIC 6/6-W2.9xW2.9 IN FLAT SHEETS. FINISH FLOOR SLAB ELEVATION SEE CIVIL FOR DATUM

ANCHOR BOLT SCHEDULE (F1554 GRADE 36)


ANCHOR BOLT DIAMETER	ANCHOR BOLT PROJECTION ABOVE TOP OF FOUNDATION	GROUT THICKNESS	MIN. WASHER WIDTH	MIN. WASHER THICKNESS	COUNT
3/4"	8"	2"	2"	1/4"	56
1"	8"	2"	3"	3/8"	24

BASE PLATE SCHEDULE (36 KSI)

MARK	PLATE WIDTH	PLATE LENGTH	PLATE THICKNESS	ANCHOR BOLT DIAMETER	ANCHOR BOLT EMBEDMENT	COUNT
BP12	12"	12"	3/4"	HEADED ANCHOR BOLT : 3/4" Ø	8"	10
BP14	14"	14"	1"	HEADED ANCHOR BOLT : 3/4" Ø	8"	4
BP1518	15"	18"	3/4"	HEADED ANCHOR BOLT : 1" Ø	8"	4




BP1518




BP14


NOTE: WELD ALL WASHERS TO BASE PLATES AT ALL BRACE FRAME AND MOMENT FRAME COLUMN LOCATIONS.



BP16



BP12



NOTE: SQUARE OR CIRCULAR WASHERS ARE ACCEPTABLE.


HEADED ANCHOR BOLT & WASHER

WALL FOOTING SCHEDULE

MARK	WIDTH	THICKNESS	BOTTOM REINFORCEMENT	TOP REINFORCEMENT
WF20	2' - 0"	1' - 0"	2 #6	

SPREAD FOOTING SCHEDULE

MARK	LENGTH	WIDTH	THICKNESS	BOTTOM REINFORCEMENT	TOP REINFORCEMENT	COUNT
F30	3' - 0"	3' - 0"	1' - 0"	4 #4 EA. WAY		3
F38	3' - 8"	3' - 8"	1' - 0"	5 #4 EA. WAY		3
F50	5' - 0"	5' - 0"	1' - 2"	5 #5 EA. WAY		6
F60	6' - 0"	6' - 0"	1' - 4"	7 #5 EA. WAY		1
F70	7' - 0"	7' - 0"	1' - 4"	7 #6 EA. WAY		1
F7040	4' - 0"	7' - 0"	1' - 4"	7 #6 SW, 5 #6 LW	7 #6 SW, 5 #6 LW	1
F10050	5' - 0"	10' - 0"	1' - 2"	9 #6 SW, 5 #6 LW	9 #6 SW, 5 #6 LW	1

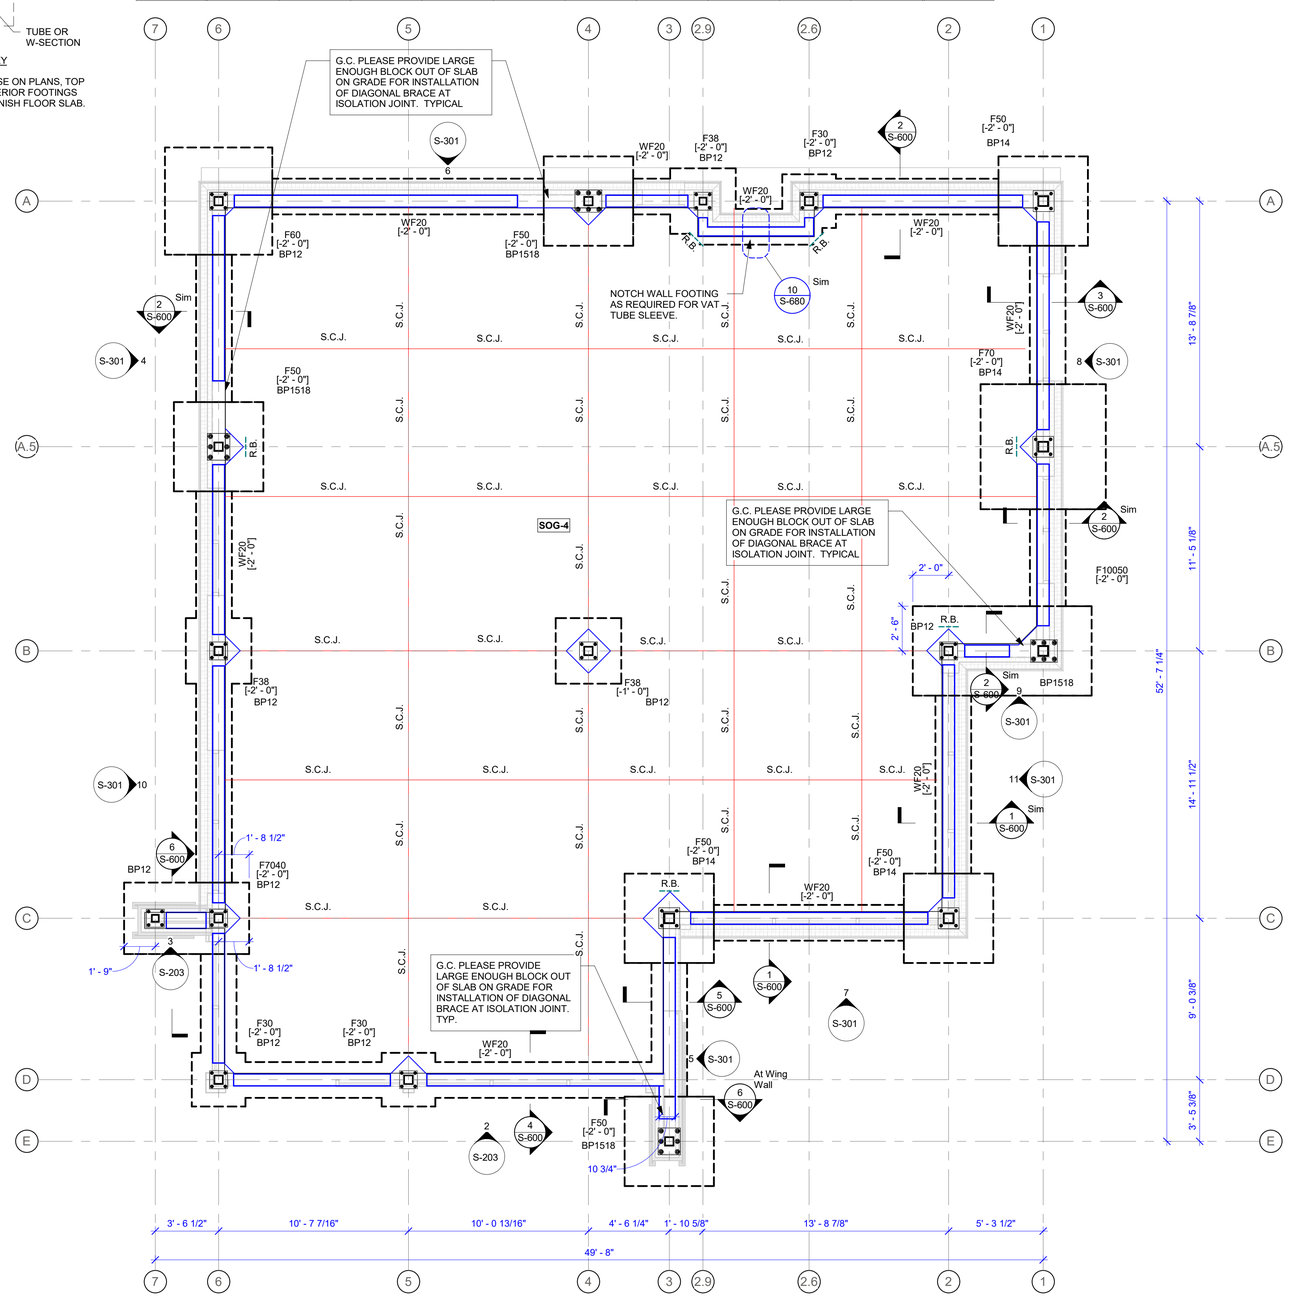

1 S-201 Foundation Plan

1/4" = 1'-0"

Gridline Type Legend

NEW GRIDLINE

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303

404-875-4500 tel
404-876-8884 fax
www.praxis3.com

GEORGIA REGISTERED No. SE001277 STRUCTURAL ENGINEER MARK W. NANNIS

Copyright © 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
1	07/02/2026	PERMIT SET

MARK NANNIS STRUCTURAL ENGINEERS

Mark Nannis Structural Engineers
2060 Buford Highway NE, Suite 106
Buford, GA 30518

All drawings, specifications, and other work product of Mark Nannis Structural Engineers (henceforth referred to as "The Engineer") for this project are instruments of service for this project only and shall remain the property of The Engineer whether the project is complete or not. Reuse of any of the instruments of service of The Engineer by the owner or extensions of this project without the written permission of The Engineer shall be at the owner's risk and the owner agrees to defend, indemnify, and hold harmless The Engineer from all claims, damages, and expenses including attorney's fees arising out of such unauthorized reuse of The Engineer's instruments of service by the owner or others acting through the owner.
© 2026

Client:

FIFTH THIRD BANK

Project Number: 26302
Project Name:

WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Sheet Title:

Structural Plan - Foundation

Sheet Number:

S-201

RELEASED FOR CONSTRUCTION AND PERMIT

6/26/2026 12:52:19 PM