FIFTH THIRD

WATSON, GA

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

KAHUA PROJECT #: K1130695

PROJECT #: 26032

FLORIDA PRODUCT APPROVAL

PRODUCT TYPE	MANUFACTURER	MODEL # / SERIES	FL PRODUCT APPR. NO.	MIAMI DADE N.O.A.
EXTERIOR PANELS				
SWINGING-CURTAINWALL	KAWNEER	350T INSULPOUR IMPACT RESISTANT. 10" BOTTOM STILE	FL 28914.1-R5	N/A
SWINGING - STOREFRONT	KAWNEER	350T INSULPOUR IMPACT RESISTANT. 10" BOTTOM STILE	FL 28914.1-R5	N/A
SWINGING - EXT. DOOR ASSEMBLY	CECO DOOR PRODUCT	OUTSWINGING COMMERCIAL DOOR	FL 16355.2 - R4	N/A
WALL PANELS				
IMPACT RESISTANT CURTAIN WALL	KAWNEER	1600 WALL SYSTEM 1	FL 5388.2 - R12	N/A
IMPACT RESISTANT STOREFRONT	KAWNEER	TRIFAB VERSAGLAZE 451T, 1" INSULATED CENTER SET GLASS	FL 14287.1 - R10	N/A
ALUMINUM COMPOSITE METAL PANEL	ALCOA ARCHITECTURAL REYNOBOND	REYNOBOND COMPOSITE PANELS	FL 11794 - R3	N/A
EIFS	DRYVIT	DRYVIT OUTSULATION PLUS MD	FL 3423.3 - R12	N/A
ROOFING PRODUCTS				
TPO ROOFING SYSTEM	FIRESTONE	ULTRA PLY TPO SINGLE PLY ROOFING SYSTEM - STEEL DECKS	FL 10264 - R19	N/A
ROOF HATCH	BILCO	S-50	FL 15110.1 - R6	N/A
ROOFING BOARD	USG	SECUROCK GYPSUM FIBER ROOF BOARD	FL 4264.1 - R9	N/A
ROOFING FASTENERS	METAL ERA	METAL ERA ROOF EDGE TERMINATION SYSTEM	FL 29463.1 - R2	N/A
OTHER PRODUCTS				
CONCRETE LINTELS	CAST-CRETE USA	HIGH STRENGTH PRECAST AND PRESTRESS CONCRETE LINTEL	FL 158.1 - R17	N/A
INTERIOR STOREFRONT DOOR	KAWNEER	350 STANDARD ENTRANCE. 10" BOTTOM RAIL	FL 10388.1 - R6	N/A

SYMBOLS

WALL TYPE (X)

ROOM TAG (ROOM / XXX)

DETAIL TAG (1 / A1.0)

PLAN DETAIL TAG (1 / A1.0)

REVISION NUMBER (#)

DOOR TAG (101A)

INTERIOR ELEVATION TAG (N / W A1.0 E / S)

BUILDING SECTION TAG (1 / A1.0)

FINISH TAG (FINISH)

WINDOW TAG (F10)

KEYNOTE (X)

ELEVATION DATUM TAG (ELEVATION 0'-0")

EXTERIOR ELEVATION TAG (1 / A1.0)

GRID BUBBLE & CENTER LINE (1)

OWNER & CONSULTANTS

OWNER
FIFTH THIRD BANK
TAMMALA BROOKS
VICE PRESIDENT
DIRECTOR - PROJECT GROUP
FIFTH THIRD BANK RETAIL
38 FOUNTAIN SQUARE PLAZA
MD 10903K
CINCINNATI, OH 45202
TAMMALA.BROOKS@53.COM

CIVIL / LANDSCAPE / MEP
GASKINS + LECRAW
1266 POWDER SPRINGS RD SW
MARIETTA, GA 30064
CONTACT: MICHELLE MACAULEY
678.257.1914

ARCHITECT
PRAXIS3, LLC
100 PEACHTREE ST NW,
SUITE 1450
ATLANTA, GA 30303
CONTACT: STUART ROMM
678.904.7422

STRUCTURAL
MARK NANNIS STRUCTURAL ENGINEERS, INC.
2060 BUFORD HIGHWAY SUITE 106
BUFORD, GA 30518
CONTACT: MARK NANNIS
770.310.8472

OWNER AGENT
CBRE GLOBAL
DARLECIA RHONE
PROJECT MANAGER
CBRE GLOBAL WORKPLACE
T: 1.678.216.8407
E: DARLECIA.RHONE@CBRE.COM

MECHANICAL/PLUMBING
BARRETT, WOODYARD & ASSOCIATES
310 TECHNOLOGY SUITE 200
PEACHTREE CORNERS, GA 30092
CONTACT: GARRY JENKINS
678.654.6707

ELECTRICAL
BARRETT, WOODYARD & ASSOCIATES
310 TECHNOLOGY SUITE 200
PEACHTREE CORNERS, GA 30092
CONTACT: RAHN WILLIAMS
678.301.2227

UTILITIES

SANITARY SEWER AND WATER
WARNER ROBINS UTILITIES
MAINTENANCE DEPARTMENT
95 GLENN DRIVE
WARNER ROBINS, GA 31088
WILLIAM ABARCA
WABARCA@WRGA.GOV
478.302.5438

ELECTRIC & TELEPHONE
FINT ENERGIES
98 CARL VINSON PARKWAY
WARNER ROBINS, GA 31088
LEE MARSH
LMARSH@FLINTEMC.COM
478.988.3950

VICINITY MAP

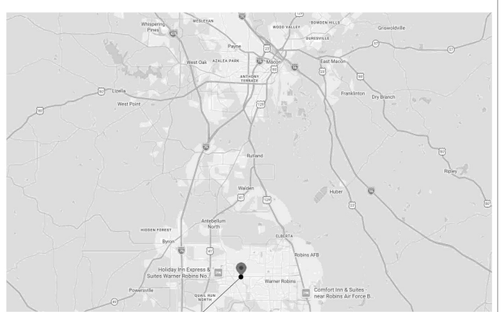

PROJECT LOCATION

LOCATION MAP

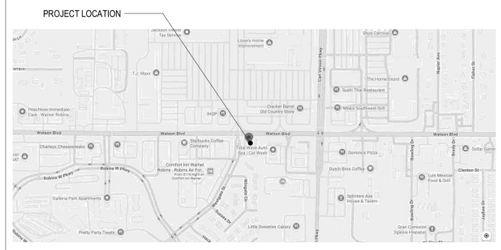

GENERAL NOTES

1. THE CONSTRUCTION NOTES AND DRAWINGS ARE SUPPLIED TO ILLUSTRATE THE DESIGN AND GENERAL TYPE OF CONSTRUCTION DESIRED AND ARE INTENDED TO IMPLY THE FINEST QUALITY OF CONSTRUCTION, MATERIAL AND WORKMANSHIP THROUGHOUT.
2. ALL WORK SHALL BE IN COMPLIANCE WITH APPLICABLE FEDERAL, STATE AND LOCAL BUILDING CODES, REGULATIONS, ORDINANCES & STANDARDS INCLUDING ADA & OTHER HANDICAP ACCESSIBILITY CODES.
3. PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION, CONTRACTOR SHALL VERIFY EXISTENCE AND LOCATION OF ALL ABOVE AND BELOW GRADE, UTILITIES, INCLUDING SANITARY SEWER, STORM SEWER, WATER, GAS, ELECTRICAL, TELEPHONE, ETC. ANY DISCREPANCIES IN UTILITY LOCATIONS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT. GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR SET UP AND COORDINATION OF ALL UTILITY SERVICES FOR THE PROJECT.
4. GENERAL CONTRACTOR SHALL COORDINATE SCHEDULING AND SEQUENCING OF THE WORK WITH OWNER'S REPRESENTATIVE. GENERAL CONTRACTOR IS RESPONSIBLE FOR COORDINATING THE OWNER'S VENDORS ON SITE DURING CONSTRUCTION.
5. GENERAL CONTRACTOR SHALL PROVIDE AN AS-BUILT SET OF DRAWINGS TO THE [SUPERVISOR(PROJECT MANAGEMENT)] (SPM) AT THE END OF THE PROJECT.
6. GENERAL CONTRACTOR WILL SECURE ALL BUILDING PERMITS & INSPECTIONS NECESSARY FOR THE CONSTRUCTION OF THE PROJECT. UPON COMPLETION OF PROJECT, OBTAIN ALL FINAL INSPECTIONS AS REQUIRED BY LOCAL JURISDICTIONS AND FURNISH OWNER WITH EVIDENCE OF ALL SUCH INSPECTIONS AND CERTIFICATES OF OCCUPANCY.
7. THE GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS PRIOR TO BEGINNING CONSTRUCTION AND REPORT ANY ERRORS OR INCONSISTENCIES TO THE ARCHITECT.
8. THE DRAWINGS ARE NOT TO BE SCALED. LARGE SCALE DRAWINGS HAVE PRECEDENCE OVER SMALL SCALE DRAWINGS.
9. THE CONTRACTOR, WITHOUT EXTRA CHARGE, SHALL MAKE SLIGHT ALTERATIONS - CUTTING, FITTING, OR PATCHING OF HIS WORK AS MAY BE NECESSARY TO MAKE ADJUSTABLE PARTS FIT TO FIXED PARTS, LEAVING ALL IN WORKING ORDER WHEN COMPLETED.
10. WHERE TRENCHING OR CORE DRILLING IS REQUIRED, SUBFLOORING AND/OR SUBSTRATE SHALL BE RETURNED TO A LEVEL CONDITION.
11. GENERAL CONTRACTOR SHALL PROVIDE TERMITE PROTECTION, TO COMPLY WITH FBC 1816.1, UNDER ANY TRENCHING WORK.
12. GENERAL CONTRACTOR IS RESPONSIBLE FOR ALL SITE CUT & FILL TO ATTAIN FINISH GRADES AS INDICATED ON THESE DRAWINGS. GENERAL CONTRACTOR SHALL INCLUDE THE COST OF ANY TOPSOIL REQUIRED IN ADDITION TO THAT ON SITE, AT THE TIME OF THE PRE-BID MEETING, IN BASE BID.
13. GENERAL CONTRACTOR TO BE RESPONSIBLE FOR SITE CLEAN UP NIGHTLY AND SECUREMENT OF THE WORK SITE.
14. ALL NEW CONSTRUCTION SHALL BE VERIFIED TO BE IN COMPLIANCE WITH THE LOCALLY ADOPTED ACCESSIBILITY REGULATIONS. ANYTHING FOUND NOT IN COMPLIANCE SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE. ALL SLOPES SHALL BE MEASURED WITH A 24" SMART LEVEL.
15. GENERAL CONTRACTOR SHALL PERFORM AS NECESSARY A TOPOGRAPHIC SURVEY PRIOR TO STARTING CONSTRUCTION AND REPORT ANY DISCREPANCIES IN GRADES AS COMPARED TO EXISTING GRADES INDICATED ON DRAWINGS. SUBMIT A COPY OF TOPOGRAPHIC SURVEY TO ARCHITECT AND INDICATE ANY DISCREPANCIES ON SURVEY PRIOR TO COMMENCING EARTHWORK WHEN SCOPE OF THE PROJECTS NECESSITATES IT.
16. NOTED ACCESSIBLE ITEMS AND DESCRIPTIONS FOR PARKING LOT, ARE TO BE A PORTION OF THE SHOWN ACCESSIBILITY WORK, COORDINATED WITH PROJECT MANAGER AS REQUIRED TO COMPLETE THE NOTED WORK. WHERE GRADES ARE AFFECTED THE CONTRACTOR SHALL USE A SURVEYOR AS NEEDED TO ENSURE PROPER GRADES ARE ACHIEVED. STRIPING SHALL BE COMPLETED PER THE REQUIREMENTS OF THE CURRENT ADAAG GUIDELINES, AND THE CUSTOMER PATH OF TRAVEL REMEDIATION GUIDELINES (LATEST REVISION) AS WELL AS APPLICABLE STATE AND LOCAL CODES.

DRAWINGS		DRAWINGS ISSUED
SHEET #	SHEET NAME	07/02/2026 - PERMIT SET
GENERAL		
G-000	COVER SHEET	•
G-001	LIFE SAFETY PLAN	•
G-002	ACCESSIBILITY NOTES	•
G-003	COMCHECK	•
CIVIL		
C-0.0	COVER	•
C-0.1	GENERAL NOTES	•
C-0.11	GENERAL	•
C-0.12	GENERAL	•
C-1.0	DEMOLITION PLAN	•
C-2.0	ESPC - PHASE 1	•
C-2.1	ESPC - PHASE 2	•
C-2.2	ESPC - PHASE 3	•
C-2.3	ESPC NOTES - 1	•
C-2.4	ESPC NOTES - 2	•
C-2.5	ESPC DETAILS - 1	•
C-2.6	ESPC DETAILS - 2	•
C-3.0	SITE PLAN	•
C-4.0	GRADING PLAN	•
C-5.0	UTILITY PLAN	•
C-6.0	STORM PROFILES	•
C-6.1	SANITARY PROFILES	•
C-7.0	CONSTRUCTION DETAILS - 1	•
C-7.1	CONSTRUCTION DETAILS - 2	•
C-7.2	CONSTRUCTION DETAILS - 3	•
C-7.3	CONSTRUCTION DETAILS - 4	•
C-7.4	CONSTRUCTION DETAILS - 5	•
LANDSCAPE		
L-1.0	LANDSCAPE PLAN	•
L-1.1	LANDSCAPE DETAILS	•

DRAWINGS		DRAWINGS ISSUED
SHEET #	SHEET NAME	07/02/2026 - PERMIT SET
ARCHITECTURAL		
A-110	FLOOR PLAN	•
A-120	DIMENSIONAL FLOOR PLAN	•
A-130	REFLECTED CEILING PLAN	•
A-131	ENLARGED REFLECTED CEILING PLAN	•
A-140	ROOF PLAN	•
A-150	FINISH PLAN	•
A-160	FURNITURE & EQUIPMENT	•
A-170	SCHEDULES	•
A-190	TRASH ENCLOSURE AND DETAILS	•
A-200	EXTERIOR ELEVATIONS	•
A-201	EXTERIOR ELEVATIONS	•
A-202	COLOR EXTERIOR ELEVATIONS	•
A-300	BUILDING SECTIONS	•
A-310	EXTERIOR WALL SECTIONS	•
A-311	EXTERIOR WALL SECTIONS	•
A-401	BANK EQUIPMENT PLANS & DETAILS	•
A-402	BANK EQUIPMENT CUT SHEETS	•
A-410	ENLARGED RESTROOM PLANS & ELEVATIONS	•
A-420	ENLARGED WING WALL PLANS & ELEVATIONS	•
A-430	SECTION DETAILS	•
A-440	PLAN DETAILS	•
A-450	ROOF DETAILS	•
A-600	DOOR SCHEDULE & DETAILS	•
A-601	HARDWARE SCHEDULES	•
A-610	WINDOW ELEVATIONS	•
A-620	INTERIOR PARTITION SCHEDULE & DETAILS	•
A-630	CEILING DETAILS	•
A-700	TRANSACTION BAR - ENLARGED PLAN & DETAILS	•
A-701	BACK COUNTER - ENLARGED PLAN & DETAILS	•
A-702	LIBRARY - ENLARGED PLAN & DETAILS	•
A-703	SERVICE COUNTER - ENLARGED PLAN & DETAILS	•
A-704	TECH WALL & LOUNGE BOOTH - ENLARGED PLAN & DETAILS	•
A-705	EMPLOYEE LOUNGE - ENLARGED PLAN & DETAILS	•
A-706	BOOTH - ENLARGED PLAN & DETAILS	•
A-707	WORK ROOM - ENLARGED PLAN & DETAILS	•
A-708	CHECK DESK - ENLARGED PLAN & DETAILS	•
STRUCTURAL		
S-001	GENERAL NOTES	•
S-002	GENERAL NOTES	•
S-003	SPECIAL INSPECTIONS SCHEDULES	•
S-201	STRUCTURAL PLAN - FOUNDATION	•
S-203	STRUCTURAL PLAN - ROOF	•
S-301	ELEVATIONS - STEEL FRAMES	•
S-410	EXTERIOR AXONOMETRICS	•
S-411	EXTERIOR AXONOMETRICS	•
S-600	WALL SECTIONS - FOUNDATION	•
S-601	WALL SECTIONS	•
S-602	WALL SECTIONS	•
S-603	WALL SECTIONS	•
S-680	TYPICAL DETAILS (FOUNDATION)	•
S-681	TYPICAL DETAILS (STEEL)	•
S-682	TYPICAL DETAILS (STEEL)	•
S-683	ENLARGED STEEL DETAILS	•
S-685	TYPICAL DETAILS (MISC)	•
MECHANICAL		
M-001	MECHANICAL NOTES AND SPECIFICATIONS	•
M-002	MECHANICAL NOTES AND LEGEND	•
M-101	MECHANICAL SCHEDULES	•
M-102	MECHANICAL VENTILATION SCHEDULES	•
M-301	MECHANICAL PROPOSED CEILING PLAN	•
M-302	MECHANICAL PROPOSED ROOF PLAN	•
M-401	MECHANICAL ISOMETRIC PLAN	•
M-501	MECHANICAL DETAILS	•
M-502	MECHANICAL DETAILS AND CONTROLS	•
M-503	MECHANICAL CONTROLS DETAILS	•
M-700	MECHANICAL DUCT SECTION VIEWS	•
PLUMBING		
P-001	PLUMBING SPECIFICATIONS AND NOTES	•
P-101	PLUMBING TABLES AND SCHEDULES	•
P-301	PLUMBING SANITARY FOUNDATION PLAN	•
P-302	PLUMBING DOMESTIC FLOOR PLAN	•
P-303	PLUMBING PROPOSED ROOF PLAN	•
P-401	PLUMBING BUILDING ISOMETRIC	•
P-402	PLUMBING ISOMETRIC RISER DIAGRAM	•
P-403	PLUMBING NATURAL GAS ISO PLAN	•
P-501	PLUMBING DETAILS	•
ELECTRICAL		
E-001	ELECTRICAL LEGEND AND ABBREVIATION	•
E-002	ELECTRICAL GENERAL NOTES	•
E-003	ELECTRICAL SPECIFICATIONS	•
E-004	COMCHECK	•
E-010	ELECTRICAL SITE PLAN AND REMOTE DRIVE THRU	•
E-011	ELECTRICAL PHOTOMETRIC SITE PLAN	•
E-012	ELECTRICAL SITE DETAILS	•
E-100	ELECTRICAL POWER & AUXILIARY PLAN	•
E-101	ELECTRICAL POWER ROOF PLAN	•
E-130	ELECTRICAL LIGHTING PLAN	•
E-150	ELECTRICAL SECURITY PLAN	•
E-160	ELECTRICAL FIRE ALARM PLAN	•
E-500	ELECTRICAL DETAILS	•
E-600	LUMINAIRE AND SENSOR SCHEDULES AND DETAILS	•
E-601	EXTERIOR LIGHTING CUTSHEETS	•
E-602	EXTERIOR LIGHTING CUTSHEETS	•
E-603	EXTERIOR LIGHTING CUTSHEETS	•
E-610	ELECTRICAL PANEL SCHEDULES	•
E-700	ELECTRICAL DEVICE PLAN	•
E-701	ELECTRICAL ELEVATIONS	•
E-702	ELECTRICAL ELEVATIONS	•
E-703	ELECTRICAL ELEVATIONS	•
E-704	ELECTRICAL ELEVATIONS	•
E-800	ELECTRICAL RISER DIAGRAM	•
FIRE ALARM		
FA-001	FIRE ALARM LEGEND AND GENERAL NOTES	•
FA-002	FIRE ALARM RISER & DETAILS	•
FA-101	FIRE ALARM PLAN	•
SECURITY (FOR REFERENCE ONLY)		
BS01	SECURITY DEVICE LOCATIONS	•
BS02	CCTV SWEEPS	•
BS03	PACOM PANEL DETAILS	•
BS04	ELECTRICAL DEVICE LOCATIONS	•

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
COVER SHEET

Sheet Number:
G-000

7/8/2026 2:37:26 PM

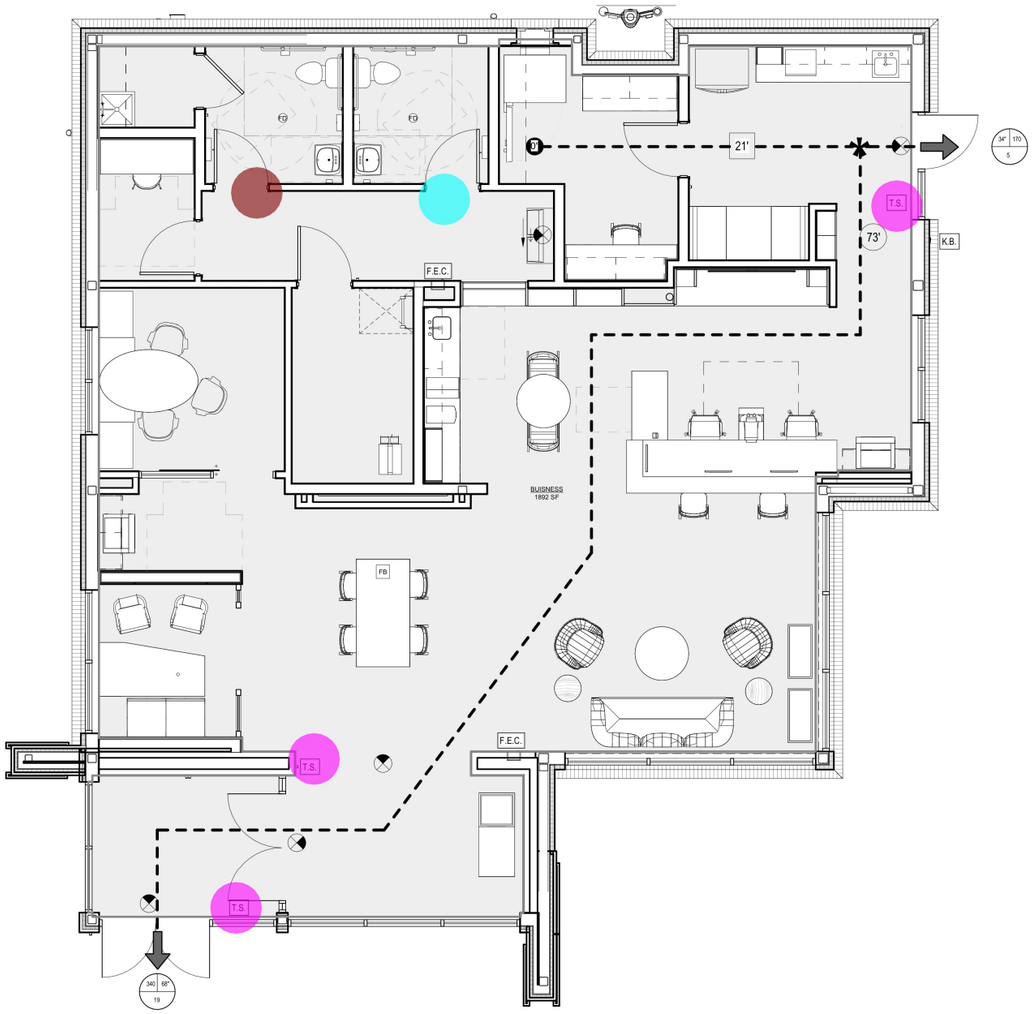

LIFE SAFETY GENERAL NOTES

1. PROVIDE FIRE EXTINGUISHERS PER NFPA10 AS REQUIRED
2. PROVIDE 1 FOOTCANDLE FOR EMERGENCY LIGHTING

LIFE SAFETY NOTES

- EMERGENCY EXIT
- TRAVEL DISTANCE
- COMMON PATH OF TRAVEL
- EXIT SIGN
- F.E. — SURFACE MOUNTED FIRE EXTINGUISHER 10LB UL RATED 4A:80B:C
- F.E.C. — RECESSED FIRE EXTINGUISHER CABINET 10LB UL RATED 4A:80B:C
- M.C.# — MAXIMUM CAPACITY SIGNAGE TO READ AS FOLLOWS: "MAXIMUM OCCUPANT LOAD XXX PERSONS BY ORDER OF THE FIRE MARSHAL" REFER TO A-410 FOR MOUNTING INFORMATION
- T.S. — TACTILE SIGNAGE PER NFPA 101-7.10.13, REFER TO G-002 FOR MOUNTING INFORMATION
- K.B. — KNOX BOX. VERIFY LOCATION WITH LOCAL MUNICIPALITY TO INSURE COMPLIANCE
- COMMON PATH OF TRAVEL POINT OF DECISION
- MOST REMOTE POINT ON FLOOR FROM AN EXIT
- A. CLEAR EXIT WIDTH
  B. MAXIUM CALCULATED OCCUPANT LOAD EACH EXIT DOOR CAN ACCOMMODATE BASED ON EGRESS WIDTH (1005.3.2)
  C. ACTUAL OCCUPANT LOAD FOR EACH DOOR

CODE INFORMATION

JURISDICTION: CITY OF WARNER ROBINS, GA

APPLICABLE CODES

- 2024 INTERNATIONAL BUILDING CODE WITH GA AMENDMENTS
- 2024 INTERNATIONAL FIRE CODE
- 2024 INTERNATIONAL PLUMBING CODE WITH GA AMENDMENTS
- 2024 INTERNATIONAL MECHANICAL CODE WITH GA AMENDMENTS
- 2024 INTERNATIONAL FUEL & GAS CODE WITH GA AMENDMENTS
- 2023 NATIONAL ELECTRICAL CODE WITH GA AMENDMENTS
- 2015 INTERNATIONAL ENERGY CONSERVATION CODE WITH GA AMENDMENTS
- 2018 LIFE SAFETY CODE WITH GA AMENDMENTS NFPA 101
- GEORGIA ACCESSIBILITY CODE
- STANDARDS FOR ACCESSIBLE DESIGN ADA (2010)

PROJECT DATA

OCCUPANCY LOAD	(TBL 1004.5/ SEC. 1004)	AREA	TOTAL
BUSINESS	1 PER 150 GSF	1900 GSF	13 OCC
TOTAL		1900 GSF	13 OCC

MEANS OF EGRESS	REQUIRED	PROVIDED
EXIT ACCESS TRAVEL DISTANCE (NFPA 38.2.6.2)	200' MAX	94'-2" MAX
COMMON PATH OF TRAVEL (NFPA 38.2.5.2.3)	100' MAX	N/A
DEAD END CORRIDOR (NFPA 38.2.5.3.2)	20' MAX	N/A
CORRIDOR WIDTH (NFPA 7.3.4.1 (2) <50 OCC PER 38.2.3.2)	44" MIN	60" MIN
MINIMUM NUMBER OF EXITS REQUIRED (NFPA 38.2.4.3)	1 EXIT	2 EXITS
EXIT WIDTH (NFPA TBL 7.3.3.1)	(0.2") 4" REQ'D PER OCCUPANT	68"
STAIR WIDTH (NFPA TBL 7.3.3.1)	(0.3") 6" REQ'D PER OCCUPANT	N/A

CONSTRUCTION TYPE (TBL 601)		VB
FIRE RESISTANCE REQUIREMENTS	**REQUIRED**	**PROVIDED**
STRUCTURAL FRAMING	0 HOUR	0 HOUR
EXTERIOR & INTERIOR BEARING WALLS	0 HOUR	0 HOUR
EXTERIOR NON-BEARING WALLS	0 HOUR	0 HOUR
INTERIOR NON-BEARING WALLS	0 HOUR	0 HOUR
FLOOR CONSTRUCTION	0 HOUR	0 HOUR
ROOF CONSTRUCTION	0 HOUR	0 HOUR

ALLOWABLE BUILDING HEIGHTS & AREA	REQUIRED	PROVIDED
ALLOWABLE AREA (506.2)	9,000 SF	1892 S.F.
ALLOWABLE HEIGHT (504.3)	40 FT	18'-8"
ALLOWABLE STORIES (504.4)	2 STORIES	1 STORY

INTERIOR FINISHES (803.11)	REQUIRED	PROVIDED
EXIT ENCLOSURES, EXIT PASSAGEWAYS & CORRIDORS	CLASS A	CLASS A
ROOMS AND ENCLOSED SPACES	CLASS C	CLASS C

FIRE PROTECTION SYSTEMS (901.2) (NFPA 38.3.5)	REQUIRED	PROVIDED
SPRINKLER SYSTEM (903.1)	N/A	N/A
FIRE EXTINGUISHERS (906.1)	PER 906.3	2

PLUMBING FIXTURE COUNT	M /F (REQUIRED)	MALE (PROVIDED)	FEMALE (PROVIDED)
OCCUPANCY LOAD/ 2	13/2 = 7 EA	-	-
WATER CLOSET (1:25)	1 PER 25 (FOR THE FIRST 50 OCCUP)	1 W.C.	1 W.C.
URINALS (2/3 SUBSTITUTION ALLOWED)	N/A	N/A	N/A
LAVATORIES (1:40)	1 PER 40 (1ST 80 OCC)	1 LAVS.	1 LAVS.
UNISEX RESTROOMS	N/A	N/A	N/A
TOTAL W.C. REQUIRED		1 W.C.	1 W.C.
DRINKING FOUNTAINS (1 / 500)	1 REQUIRED	2 PROVIDED	
SERVICE SINK	1 REQUIRED	1 PROVIDED	

NFPA REQUIREMENTS	
OCCUPANCY (6.1.11)	BUSINESS
CONSTRUCTION TYPE (TBL A.4.1.1)	V

ALLOWABLE BUILDING HEIGHTS & AREA	REQUIRED	PROVIDED
ALLOWABLE AREA	9,000 SF	1,900 GSF
ALLOWABLE HEIGHT	40 FT	18'-8"
ALLOWABLE STORIES	2 STORIES	1 STORY
EXIT REQUIREMENTS (13.2.4)	1 EXIT	2 EXITS

INTERIOR FINISHES (10.2.2.1)	REQUIRED	PROVIDED
EXIT ENCLOSURE WALL & CEILING FINISHES (7.1.4.1)	CLASS A	CLASS A
FLOOR FINISHES (7.1.4.2)	CLASS I or II	CLASS I or II

FIRE PROTECTION SYSTEMS	REQUIRED	PROVIDED
SPRINKLER SYSTEM (9.7.1.1)	--	--
FIRE EXTINGUISHER (38.3.5)	--	--

6"x4" TACTILE SIGNAGE 3.0 EA
6"x9" ADA MEN TOILET SIGNAGE 1.0 EA
6"x9" ADA WOMAN TOILET SIGNAGE 1.0 EA

NOTE: PROJECT NORTH IS FOR CONSTRUCTION PURPOSES ONLY. REFER TO CIVIL DRAWING FOR TRUE NORTH AND CORRECT BUILDING ORIENTATION AS IT RELATES TO THE SITE.

LIFE SAFETY PLAN | 1/4" = 1'-0" | 1

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
LIFE SAFETY PLAN

Sheet Number:
G-001

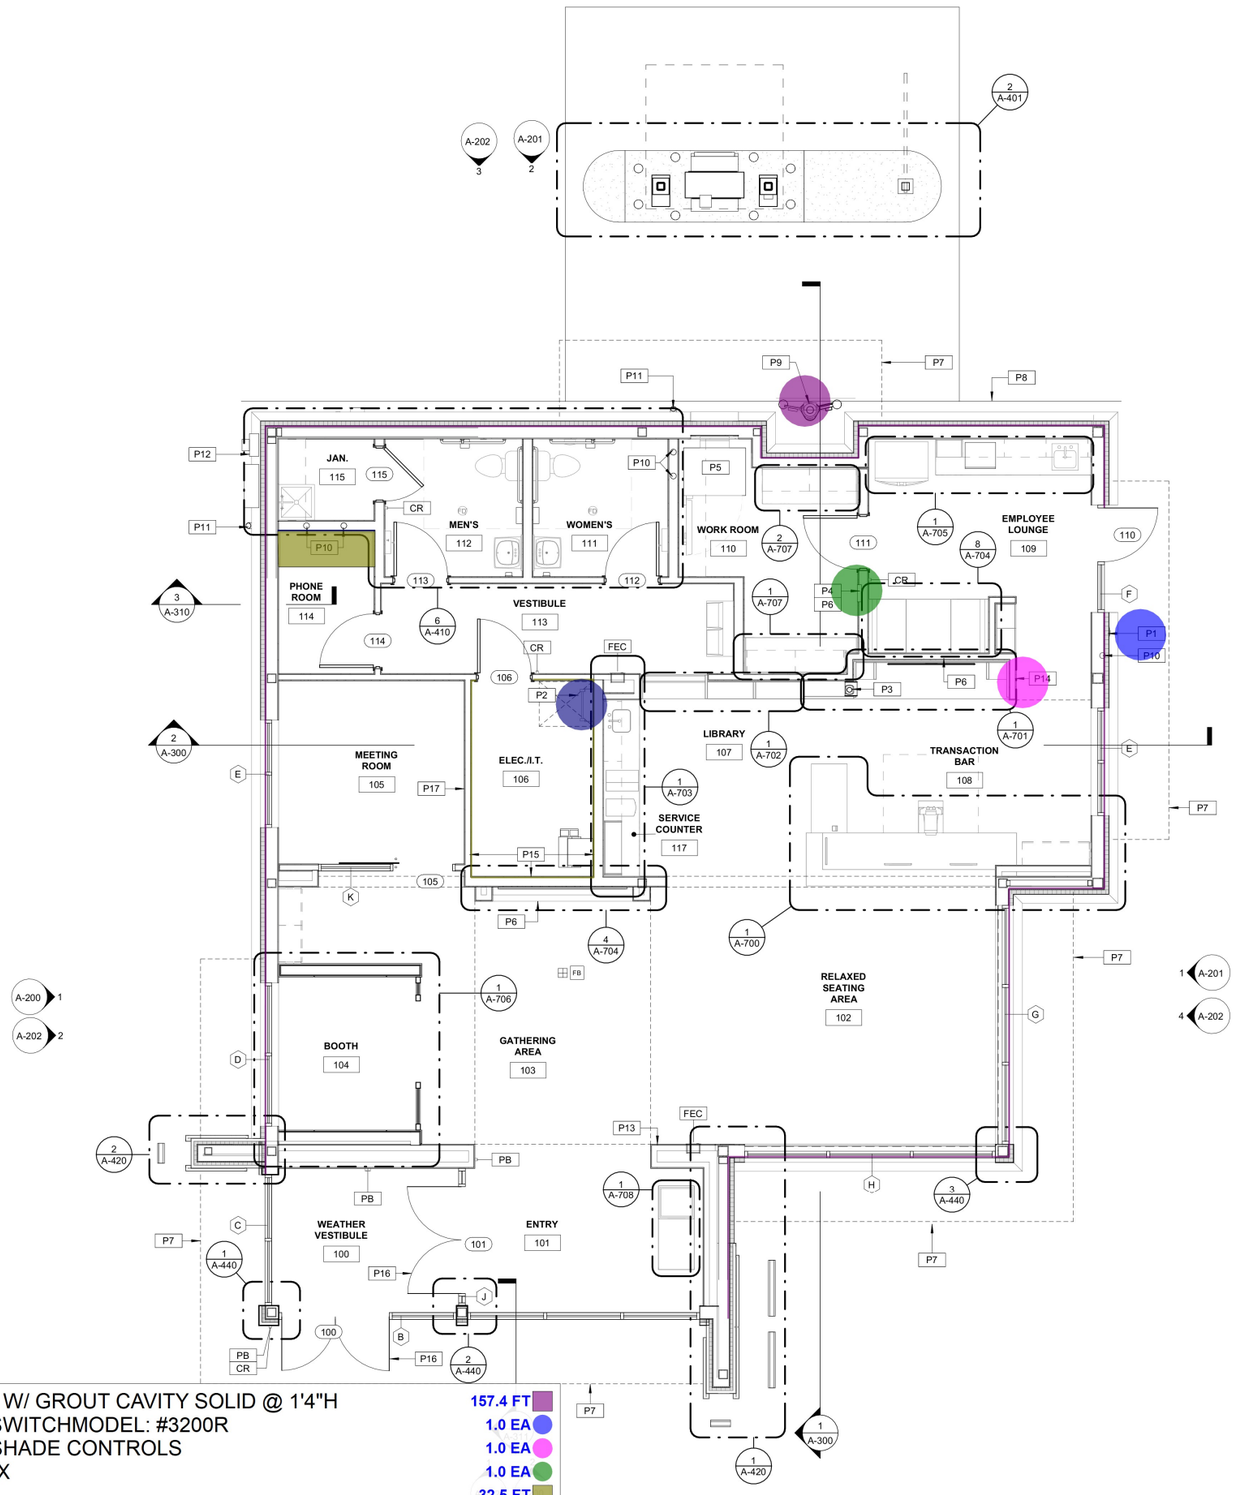

4"THK. CMU STEM WALL W/ GROUT CAVITY SOLID @ 1'4"H	157.4 FT
KNOX BOX W/ TAMPER SWITCHMODEL: #3200R	1.0 EA
MOOD MEDIA & MECHOSHADE CONTROLS	1.0 EA
DUAL CONTROL KEY BOX	1.0 EA
PLYWOOD @ 8'H	32.5 FT
1'9"W ROOF ACCESS LADDER - 1/A312	1.0 EA
REMOTE TELLER TERMINAL	1.0 EA
PL2 COUNTERTOP	11.0 SQ FT
BACKSPLASH	5.5 FT

NOTE: PROJECT NORTH IS FOR CONSTRUCTION PURPOSES ONLY. REFER TO CIVIL DRAWING FOR TRUE NORTH AND CORRECT BUILDING ORIENTATION AS IT RELATES TO THE SITE.

A110 FLOOR PLAN | 1/4" = 1'-0" | 1

GENERAL NOTES - FLOOR PLAN

A. ALL PARTITIONS ARE DIMENSIONED FROM FACE OF STUD TO FACE OF STUD, UNLESS OTHERWISE NOTED. ALL DIMENSIONS MARKED "CLEAR" SHALL BE MAINTAINED AND SHALL ALLOW FOR THICKNESS OF ALL FINISHES INCLUDING CARPET, CERAMIC TILE, VCT, ETC.
B. EDGE OF DOOR JAMB SHALL BE MINIMUM 4" FROM INTERSECTING WALL U.N.O. OR AS REQUIRED FOR HARDWARE INSTALLATION
C. SEE SHEET A-620 FOR PARTITION TYPES
D. BANK EQUIPMENT TO BE SUPPLIED AND INSTALLED BY VENDOR
E. CONTRACTOR SHALL PROVIDE BLOCKING FOR ALL WALL-MOUNTED EQUIPMENT AND ACCESSORIES.
F. CONTRACTOR SHALL COORDINATE ALL WOOD BLOCKING, STEEL SUPPORTS, AND ANY OTHER ITEMS WHICH ARE IMBEDDED IN DRYWALL PARTITIONS OR ENCLOSURES, WHICH RELATE TO THEIR WORK OR THE WORK OF ANY SEPARATE CONTRACTORS. ALL WOOD BLOCKING, BRIDGING, BRACING, FRAMING, ETC., SHALL BE FIRE RETARDANT TREATED AS CALLED FOR BY THE GOVERNING BUILDING CODE AND THE CONTRACTOR MUST SUBMIT AFFIDAVITS OF SUCH FIRE TREATMENT TO THE OWNER
G. ALL INTERIOR FINISHES ARE TO COMPLY WITH THE REQUIREMENTS AS SET FORTH IN THE CURRENT STANDARD EDITIONS OF ALL GOVERNING CODES, REGULATIONS, AND ORDINANCES HAVING JURISDICTION OVER THE SCOPE OF WORK.
H. CONTRACTOR WILL SECURE ALL BUILDING PERMITS & INSPECTIONS NECESSARY FOR THE CONSTRUCTION OF THE PROJECT
I. DRAWINGS ARE NOT TO BE SCALED
J. LOCATION AND NUMBER OF FIRE EXTINGUISHERS ARE TO BE INSTALLED PER THE DIRECTION OF THE LOCAL AUTHORITIES AND NFPA 13
K. FURNITURE AND MILLWORK TO BE PROVIDED BY OWNER VENDOR. G.C. TO COORDINATE LOCATION OF BLOCKING, PLUMBING, ELECTRICAL AND ALL OTHER REQUIREMENTS
L. REFERENCE ENGINEERING PLANS FOR PLUMBING, ELECTRICAL EQUIPMENT, AND SYSTEMS. CONTRACTOR TO VERIFY AND COORDINATE PLUMBING ROUGH-IN DIMENSIONS WITH PLUMBER. (TO BE PROVIDED BY CONTRACTOR)
M. CONTRACTOR TO SET BANKING EQUIPMENT TEMPLATES. EQUIPMENT VENDOR TO VERIFY CORRECT PLACEMENT AND TO COORDINATE WITH CONTRACTOR FOR PROPER PLACEMENT
N. NO ADJUSTMENT TO THE CONTRACT AMOUNT WILL BE GIVEN FOR THE CONTRACTOR NOT FULLY ACQUAINTING THEMSELVES WITH EQUIPMENT VENDOR REQUIREMENTS
O. PINK NOISE IS TO BE PROVIDED BY THE CONTRACTOR. COORDINATE PINK NOISE LOCATION WITH MOOD MEDIA VENDOR. REFER TO ELECTRICAL DRAWINGS.
P. REFER TO SHEET A-600 FOR DOOR AND WINDOW SCHEDULE
Q. APPLIANCES PROVIDED AND INSTALLED BY G.C. U.N.O
R. REFER TO SPECS FOR ATTIC STOCK QUANTITIES

FLOOR PLAN SYMBOLS

PARTITION AS SCHEDULED

DOOR AS SCHEDULED

FEC — FIRE EXTINGUISHER CABINET

CR — WALL-MOUNTED CARD READER AS PER DOOR HARDWARE SCHEDULE

PB — ADA DOOR OPERATOR PUSH PADDLE AS PER DOOR HARDWARE SCHEDULE

FB — FLOOR BOX RECEPTACLE WITH BLACK COVER PLATE TRIM FINISH

FD — FLOOR DRAIN

KEY NOTES - FLOOR PLAN

P1	RECESSED KNOX BOX WITH TAMPER SWITCH MOUNTED AT 48" TO THE CENTER OF BOX A.F.F., MODEL # 3200R VERIFY LOCATION WITH LOCAL MUNICIPALITY TO INSURE COMPLIANCE
P2	ROOF ACCESS LADDER. REFER TO SECTION 1/A-312
P3	SINGLE SIDED VAT TUBES BY BANK VENDOR G.C. TO PROVIDE MITERED BLACK ANGLED ALUMINUM FRAME (BOTH SIDES) AROUND VAT TERMINAL. G.C. TO COORDINATE OPENING SIZE AND LOCATION WITH BANK VENDOR
P4	DUAL CONTROL KEY BOX
P5	COMBO NIGHT DEPOSIT BOX / CASH VAULT. FURNISHED BY NATIONAL VENDOR AND INSTALLED BY NATIONAL VENDOR. PREPARATION BY G.C. G.C. TO PROVIDE INSULATION AND WOOD TRIM ON INTERIOR UPON COMPLETION OF ALL ELECTRIC & ALARM WIRING. G.C. TO PROVIDE WOOD BLOCKING BETWEEN BASE OF UNIT AND FLOOR. G.C. TO CONFIRM AND COORDINATE EQUIPMENT CUT SHEETS WITH BANK AND EQUIPMENT VENDOR PRIOR TO INSTALLATION OF WALL OPENING
P6	WALL MOUNTED MONITOR BY BANK VENDOR. COORDINATE W/ OWNER'S VENDOR AND MEP DRAWINGS
P7	LINE OF CANOPY ABOVE
P8	EDGE OF CONCRETE CURB, REF. CIVIL
P9	REMOTE TELLER TERMINAL
P10	ROOF LEADER. REFER TO PLUMBING DRAWINGS
P11	OVERFLOW DOWNSPOUT NOZZLE. REFER TO PLUMBING DRAWINGS
P12	ELECTRICAL METER. REFER TO ELECTRICAL DRAWINGS
P13	DRIVE-THRU INDICATOR LIGHT, INSTALLED AT 8'-0" AFF
P14	LOCATION OF MOOD MEDIA AND MECHOSHADE CONTROLS
P15	INSTALL FIRE RETARDANT PLYWOOD ON ALL WALLS WITHIN IT/ELEC ROOM. PLYWOOD TO BE 8' TALL AND PAINTED TO MATCH ADJACENT WALL. G.C. TO MAINTAIN VISIBILITY OF PLYWOOD LABEL
P16	ACTIVE OPERABLE DOOR LEAF
P17	<varies>

GENERAL NOTES - TERMITE PROTECTION

A. SOIL TREATMENT FOR SUBTERRANEAN TERMITE PREVENTION INSIDE THE FOUNDATION PERIMETER SHALL BE DONE AFTER ALL EXCAVATION, BACKFILLING AND COMPACTION IS COMPLETE.
B. SOIL AREA DISTURBED AFTER INITIAL CHEMICAL SOIL TREATMENT SHALL BE TREATED WITH A CHEMICAL SOIL TREATMENT, INCLUDING SPACES BOXED OR FORMED.
C. SPACE IN CONCRETE FLOORS BOXED OUT OR FORMED FOR THE SUBSEQUENT INSTALLATION OF PLUMBING TRAPS, DRAINS, OR ANY OTHER PURPOSE, SHALL BE CREATED BY USING PLASTIC OR METAL PERMANENTLY PLACED FORMS OF SUFFICIENT DEPTH TO ELIMINATE ANY PLANNED SOIL DISTURBANCE AFTER INITIAL CHEMICAL SOIL TREATMENT.
D. CHEMICALLY TREATED SOIL SHALL BE PROTECTED WITH A MINIMUM 10 MIL VAPOR RETARDER TO PROTECT AGAINST RAINFALL DILUTION. IF RAINFALL OCCURS BEFORE VAPOR RETARDER PLACEMENT, RE-TREATMENT IS REQUIRED. ANY WORK, INCLUDING PLACEMENT OF REINFORCING STEEL, DONE AFTER CHEMICAL TREATMENT UNTIL THE CONCRETE FLOOR IS POURED, SHALL BE DONE IN SUCH A MANNER AS TO AVOID PENETRATING OR DISTURBING TREATED SOIL.
E. CONCRETE OVER-POUR OR MORTAR ACCUMULATED ALONG THE EXTERIOR FOUNDATION PERIMETER SHALL BE REMOVED PRIOR TO EXTERIOR CHEMICAL SOIL TREATMENT, TO ENHANCE VERTICAL PENETRATION OF THE CHEMICALS.
F. CHEMICAL SOIL TREATMENTS SHALL ALSO BE APPLIED UNDER ALL EXTERIOR CONCRETE OF GRADE WITHIN ONE (1) FOOT OF PRIMARY STRUCTURE SIDEWALLS. ALSO A VERTICAL CHEMICAL BARRIER SHALL BE APPLIED PROMPTLY AFTER CONSTRUCTION IS COMPLETED. INCLUDING INITIAL LANDSCAPING AND IRRIGATION/SPRINKLER INSTALLATION. ANY SOIL DISTURBED AFTER THE CHEMICAL VERTICAL BARRIER IS APPLIED SHALL BE PROMPTLY RE-TREATED.
G. THE RULES AND LAWS AS ESTABLISHED BY THE STATE DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES SHALL BE DEEMED AS APPROVED WITH RESPECT TO PRE-CONSTRUCTION SOIL TREATMENT FOR PROTECTION AGAINST SUBTERRANEAN TERMITES.
H. A 'CERTIFICATE OF COMPLIANCE' SHALL BE ISSUED TO THE BUILDING DEPARTMENT BY THE LICENSED PEST CONTROL COMPANY THAT CONTAINS THE FOLLOWING STATEMENT: 'THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES. TREATMENT IS IN ACCORDANCE WITH RULES AND LAWS ESTABLISHED BY THE STATE DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES'.

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
FLOOR PLAN

Sheet Number:
A-110

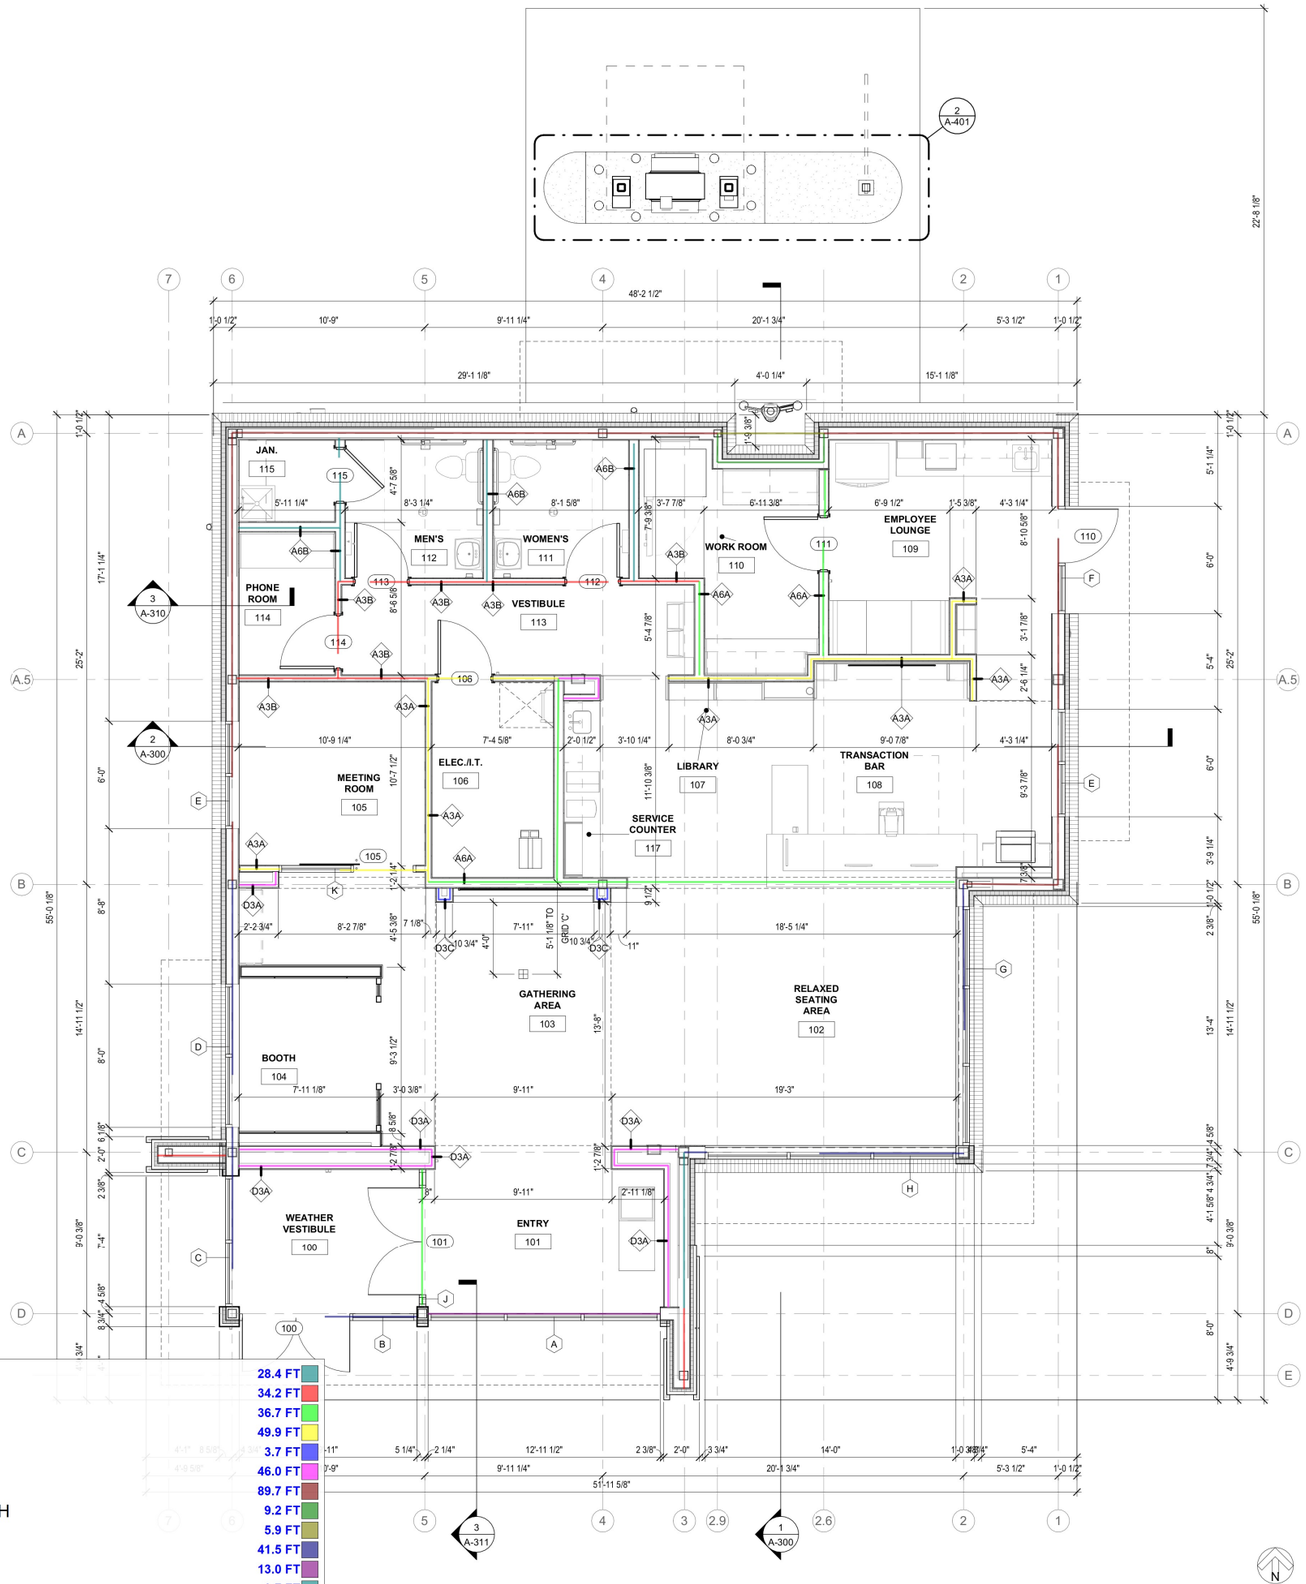

WALL A6B @ 12'6"H	28.4 FT
WALL A3B @ 12'6"H	34.2 FT
WALL A6A @ 12'6"H	36.7 FT
WALL A3A @ 12'6"H	49.9 FT
WALL D3C @ 12'6"H 1 SIDE	3.7 FT
WALL D3A @ 12'6"H 1 SIDE	46.0 FT
EXT 8" STUD WALL @ 12'9"H	89.7 FT
EXT 6" STUD WALL @ 12'3"H SHTNG 10'3"H	9.2 FT
PARAPET WALL @ 7'2"H A310	5.9 FT
EXT 8" STUD WALL @ 15'9"H	41.5 FT
EXT 8" STUD WALL @ 4'H	13.0 FT
EXT 8" STUD WALL @ 15'9"H NO GWB	8.7 FT
6" & 3-5/8" METAL STUD @ 18'8"H, BS 1/2" SHTNG ONLY	8.4 FT
6" METAL STUD WALL @ 4'4" HT, BS GWB	18.3 FT
WALL A3A @ 3'9"H (NO INS)	7.7 FT

NOTE: PROJECT NORTH IS FOR CONSTRUCTION PURPOSES ONLY. REFER TO CIVIL DRAWING FOR TRUE NORTH AND CORRECT BUILDING ORIENTATION AS IT RELATES TO THE SITE.

DIMENSIONAL FLOOR PLAN | 1/4" = 1'-0" | 1

GENERAL NOTES - FLOOR PLAN

A. ALL PARTITIONS ARE DIMENSIONED FROM FACE OF STUD TO FACE OF STUD, UNLESS OTHERWISE NOTED. ALL DIMENSIONS MARKED "CLEAR" SHALL BE MAINTAINED AND SHALL ALLOW FOR THICKNESS OF ALL FINISHES INCLUDING CARPET, CERAMIC TILE, VCT, ETC.
B. EDGE OF DOOR JAMB SHALL BE MINIMUM 4" FROM INTERSECTING WALL U.N.O. OR AS REQUIRED FOR HARDWARE INSTALLATION
C. SEE SHEET A-620 FOR PARTITION TYPES
D. BANK EQUIPMENT TO BE SUPPLIED AND INSTALLED BY VENDOR
E. CONTRACTOR SHALL PROVIDE BLOCKING FOR ALL WALL-MOUNTED EQUIPMENT AND ACCESSORIES.
F. CONTRACTOR SHALL COORDINATE ALL WOOD BLOCKING, STEEL SUPPORTS, AND ANY OTHER ITEMS WHICH ARE IMBEDDED IN DRYWALL PARTITIONS OR ENCLOSURES, WHICH RELATE TO THEIR WORK OR THE WORK OF ANY SEPARATE CONTRACTORS. ALL WOOD BLOCKING, BRIDGING, BRACING, FRAMING, ETC., SHALL BE FIRE RETARDANT TREATED AS CALLED FOR BY THE GOVERNING BUILDING CODE AND THE CONTRACTOR MUST SUBMIT AFFIDAVITS OF SUCH FIRE TREATMENT TO THE OWNER
G. ALL INTERIOR FINISHES ARE TO COMPLY WITH THE REQUIREMENTS AS SET FORTH IN THE CURRENT STANDARD EDITIONS OF ALL GOVERNING CODES, REGULATIONS, AND ORDINANCES HAVING JURISDICTION OVER THE SCOPE OF WORK.
H. CONTRACTOR WILL SECURE ALL BUILDING PERMITS & INSPECTIONS NECESSARY FOR THE CONSTRUCTION OF THE PROJECT
I. DRAWINGS ARE NOT TO BE SCALED
J. LOCATION AND NUMBER OF FIRE EXTINGUISHERS ARE TO BE INSTALLED PER THE DIRECTION OF THE LOCAL AUTHORITIES AND NFPA 13
K. FURNITURE AND MILLWORK TO BE PROVIDED BY OWNER VENDOR. G.C. TO COORDINATE LOCATION OF BLOCKING, PLUMBING, ELECTRICAL AND ALL OTHER REQUIREMENTS
L. REFERENCE ENGINEERING PLANS FOR PLUMBING, ELECTRICAL EQUIPMENT, AND SYSTEMS. CONTRACTOR TO VERIFY AND COORDINATE PLUMBING ROUGH-IN DIMENSIONS WITH PLUMBER. (TO BE PROVIDED BY CONTRACTOR)
M. CONTRACTOR TO SET BANKING EQUIPMENT TEMPLATES. EQUIPMENT VENDOR TO VERIFY CORRECT PLACEMENT AND TO COORDINATE WITH CONTRACTOR FOR PROPER PLACEMENT
N. NO ADJUSTMENT TO THE CONTRACT AMOUNT WILL BE GIVEN FOR THE CONTRACTOR NOT FULLY ACQUAINTING THEMSELVES WITH EQUIPMENT VENDOR REQUIREMENTS.
O. PINK NOISE IS TO BE PROVIDED BY THE CONTRACTOR. COORDINATE PINK NOISE LOCATION WITH MOOD MEDIA VENDOR. REFER TO ELECTRICAL DRAWINGS.
P. REFER TO SHEET A-600 FOR DOOR AND WINDOW SCHEDULE
Q. APPLIANCES PROVIDED AND INSTALLED BY G.C. U.N.O
R. REFER TO SPECS FOR ATTIC STOCK QUANTITIES

GENERAL NOTES - ACCESSIBILITY

1. ALL CONTROLS FOR USE BY CUSTOMERS MUST BE MOUNTED BETWEEN 15" AND 48" ABOVE FINISHED FLOOR AND MUST HAVE 30" X 48" MINIMUM CLEAR FLOOR SPACE FOR A FORWARD OR PARALLEL APPROACH. CONTROLS MOUNTED OVER AN OBSTRUCTION THAT IS BETWEEN 10" AND 24" DEEP MAY BE NO HIGHER THAN 46" AFF. IF A PARALLEL APPROACH IS PROVIDED; OR WHERE OBSTRUCTIONS ARE BETWEEN 20" AND 25" DEEP WITH A FORWARD APPROACH. CONTROLS MUST NOT REQUIRE TIGHT GRASPING OR TWISTING OF THE WRIST.

2. COMMON EMPLOYEE AREAS SUCH AS BREAK ROOMS, LOCKERS, AND TOILET ROOMS MUST BE ACCESSIBLE AND HAVE ACCESSIBLE FEATURES AND FIXTURES. EMPLOYEE WORK AREAS LESS THAN 1,000 SF AS DEFINED BY PERMANENTLY INSTALLED PARTITIONS, COUNTERS, CASEWORK OR FURNISHINGS ARE NOT REQUIRED TO HAVE AN ACCESSIBLE PATH OF CIRCULATION THROUGHOUT THE SPACE BUT ARE REQUIRED TO BE CONSTRUCTED SO AN INDIVIDUAL CAN APPROACH, ENTER AND EXIT THE SPACE.

3. IN COMMON SPACES WITHIN EMPLOYEE AREAS, AT LEAST ONE OF EACH TYPE OF STORAGE WORK COUNTER, 5% OF LOCKERS AND CONTROLS (EMERGENCY PHONES, CARD READERS ETC.) MUST BE ON AN ACCESSIBLE ROUTE, WITHIN REACH RANGE AND MUST COMPLY WITH STANDARDS FOR CONTROLS AS DEFINED IN THE GOVERNING ACCESSIBILITY STANDARDS OR LOCAL CODES, WHICHEVER IS STRICTER.

4. FIRE ALARM SYSTEM SHALL HAVE PERMANENTLY INSTALLED AUDIBLE AND VISIBLE ALARMS COMPLYING WITH NFPA 72 (1999 OR 2010 EDITION) AND AS REQUIRED BY LOCAL AUTHORITIES. ALARMS MUST BE LOCATED IN PUBLIC AND COMMON USE AREAS. WHERE EMPLOYEES HAVE AUDIBLE ALARMS, THE WIRING SHALL BE DESIGNED SO VISIBLE ALARMS CAN BE INTEGRATED INTO THE SYSTEM, UNLESS GREATER STANDARDS ARE REQUIRED BY LOCAL AUTHORITIES.

5. OPERABLE PORTION OF CARD READER TO BE MOUNTED AT 48" OR BELOW WITH CLEAR FLOOR SPACE FOR FRONT OR PARALLEL APPROACH.

6. ALL SIGNS IDENTIFYING PERMANENT ROOMS OR SPACES ARE REQUIRED TO HAVE VISUAL AND RAISED CHARACTERS AND BRAILLE. SIGNAGE TO BE MOUNTED ON LATCH SIDE OF DOOR WITH THE BOTTOM OF THE BRAILLE NO LOWER THAN 48" AND THE BOTTOM OF THE HIGHEST TACTILE CHARACTER NO HIGHER THAN 60" AFF.

7. IN PUBLIC AREAS PROVIDED WITH WORK SURFACES ARE COUNTERS INTENDED FOR DINING/DRINKING, AT LEAST 5% OF THE TABLES MUST BE ACCESSIBLE WITH COMPLIANT KNEE AND TOE CLEARANCE IN AN ACCESSIBLE ROUTE AND DISTRIBUTED THROUGHOUT THE SPACE. ALL EQUIPMENT, FURNITURE AND MILLWORK INTENDED FOR CUSTOMER USE MUST MEET ALL CLEARANCES AND 2. 6.

8. REACH RANGES AS DEFINED BY GOVERNING ACCESSIBILITY CODE OR LOCAL CODE; WHICHEVER IS STRICTER.

9. PROVIDE ACCESSIBLE FLOOR TRANSITIONS AT ALL LOCATIONS WHERE THERE IS A CHANGE IN FLOORING MATERIAL OR AT DOOR THRESHOLDS. THE CHANGE OF LEVEL BETWEEN MATERIALS MUST BE NO MORE THAN ¾" OR UP TO ¾" IF SLOPED NO MORE THAN 1:2.

10. ALL DATA AND POWER RECEPTACLES INTENDED FOR CUSTOMER ACCESS/USE MUST BE INSTALLED WITHIN ACCESSIBLE REACH RANGES-SEE PLAN GENERAL NOTE 1.

11. WALL MOUNTED EQUIPMENT, FIXTURES, LIGHTING, ETC. BETWEEN 27" AND 80" AFF. SHALL NOT PROTRUDE MORE THAN 4" FROM THE WALL PER ACCESSIBILITY REQUIREMENTS.

12. ALL EQUIPMENT (INCLUDING COFFEE MACHINES, ATM MACHINES, ETC.), FURNITURE, AND MILLWORK INTENDED FOR CUSTOMER USE MUST BE ON AN ACCESSIBLE ROUTE AND MUST MEET ACCESSIBILITY STANDARDS FOR CLEAR FLOOR SPACE, REACH RANGE, OPERATING PARTS, AND KNEE AND TOE SPACE AS DEFINED BY ACCESSIBILITY REQUIREMENTS OR APPLICABLE LOCAL CODES, WHICHEVER IS STRICTER.

13. ALL EQUIPMENT INTENDED FOR CUSTOMER USE MUST BE PLACED SO THAT CONTROLS REQUIRED FAR USE ARE WITHIN ACCESSIBLE REACH RANGE. OWNER MUST VERIFY THAT ALL EQUIPMENT MEETS THESE REQUIREMENTS PRIOR TO INSTALLATION.

FLOOR PLAN SYMBOLS

- PARTITION AS SCHEDULED
- DOOR AS SCHEDULED
- FEC — FIRE EXTINGUISHER CABINET
- CR — WALL-MOUNTED CARD READER AS PER DOOR HARDWARE SCHEDULE
- PB — ADA DOOR OPERATOR PUSH PADDLE AS PER DOOR HARDWARE SCHEDULE
- FB — FLOOR BOX RECEPTACLE WITH BLACK COVER PLATE TRIM FINISH
- FD — FLOOR DRAIN

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
DIMENSIONAL FLOOR PLAN

Sheet Number:
A-120

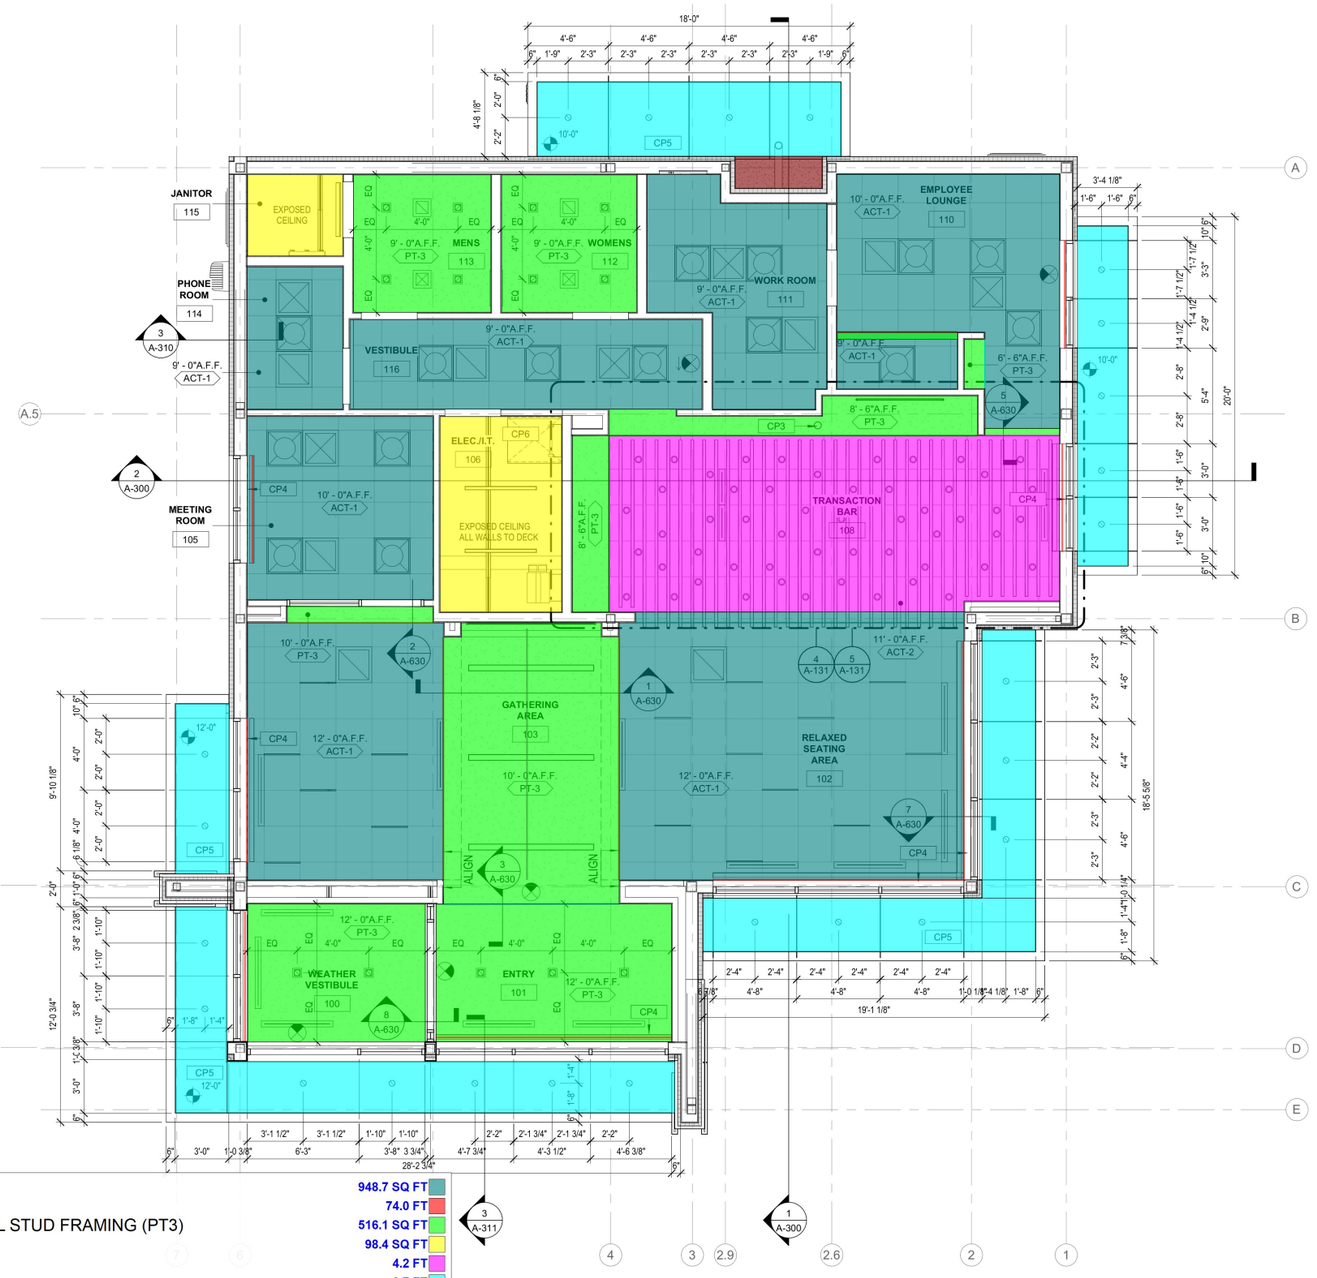

AC1 CEILING	948.7 SQ FT
MOTORIZED MECHOSHADE	74.0 FT
5/8" GWB CEILING O/ 3-5/8" METAL STUD FRAMING (PT3)	516.1 SQ FT
EXPOSED STRUCTURE	98.4 SQ FT
SOFFIT @ 3'6"H, GWB BS	4.2 FT
SOFFIT @ 6'6"H, GWB @ 4'H	2.7 FT
SOFFIT @ 3'6"H, GWB @ 1'6"H	6.7 FT
SOFFIT @ 4'6"H, GWB @ 3'H	30.5 FT
SOFFIT @ 5'9"H, GWB @ 2'6"H	35.3 FT
3-5/8" METAL STUD BRACING @ 48" O.C @ 5'H	27.1 FT
3-5/8" METAL STUD BRACING @ 48" O.C @ 8'H	28.1 FT
SOFFIT @ 2'H	28.1 FT
ACM-3 ALUMINUM COMPOSITE METAL PANEL CANOPY - 10/A430	358.7 SQ FT
EIFS SOFFIT 1/A310	8.8 SQ FT
AC2 CEILING	244.8 SQ FT

NOTE: PROJECT NORTH IS FOR CONSTRUCTION PURPOSES ONLY. REFER TO CIVIL DRAWING FOR TRUE NORTH AND CORRECT BUILDING ORIENTATION AS IT RELATES TO THE SITE.

REFLECTED CEILING PLAN | 1/4" = 1'-0" | 1

GENERAL NOTES - RCP

A. REFLECTED CEILING PLAN IS SHOWN FOR GENERAL LAYOUT PURPOSES ONLY. REFER TO MECHANICAL AND ELECTRICAL PLANS FOR ALL FIXTURES, DIFFUSERS, AND ANY OTHER REQUIREMENTS

B. REFER TO SECURITY PLAN FOR REQUIRED LIGHTING LEVELS

C. COORDINATE LENGTHS OF UNDER CABINET FIXTURES WITH SCHEDULED MILLWORK CABINETS.

D. MECHANICAL REGISTERS IN FUR DOWN ARE TO ALIGN WITH GRID

E. ALL GYPSUM BOARD CEILING PAINTED AND SUSPENDED GYPSUM BOARD ELEMENTS ARE TO BE PT-1, EXCEPT FOR THE CEILING OVER THE TRANSACTION BAR

F. CONTRACTOR TO INSTALL HVAC DUCTWORK AS HIGH AS POSSIBLE AND COORDINATE LIGHT FIXTURE LOCATIONS IN ORDER TO MAINTAIN DESIGN AT INTENDED CEILING HEIGHTS

G. GC TO PROVIDE, INSTALL AND COORDINATE PROGRAMMING OF MOTORIZED MECHOSHADES.

H. CEILING GRID MAIN TEE MUST BE PERPENDICULAR TO DIRECTION OF LINER GRID LIGHTING. G.C. TO COORDINATE.

KEY NOTES - RCP

CP1	SURFACE MOUNTED SIGN CABINET. COORDINATE SIGNAGE SIZE WITH VENDOR.
CP2	HEADACHE BAR BY BANK VENDOR
CP3	VAT TUBE - COORDINATE WITH BANK EQUIPMENT VENDOR
CP4	MOTORIZED MECHOSHADE, SEE RCP PLAN LEGEND
CP5	RECESSED CANOPY LIGHT TO BE CENTERED IN ACM, UNLESS NOTED OTHERWISE
CP6	ROOF ACCESS LADDER. REFER TO SECTION 1/A-312

LEGEND - RCP

- 2'X2' - ACOUSTIC CEILING TILE & GRID
- EXPOSED CEILING
- PAINTED GYP. CEILING
- PLASTIC LAMINATED PANEL, PL-1
- EXTERIOR GYP. CEILING
- BAR-1 BEAM BAFFLE SYSTEM
- AIR RETURN VENTS
- AIR SUPPLY VENTS
- 30" X 24" ACCESS PANEL PAINT TO MATCH CEILING
- LINEAR AIR DIFFUSER
- MOTORIZED MECHOSHADE
- EF — EXHAUST FAN
- PENDANT LIGHT
- LINEAR LIGHT
- INTEGRAL LINEAR CEILING GRID FIXTURE
- TROFFER LIGHT
- 4" RECESSED CAN DOWNLIGHT
- 6" SQUARE RECESSED CAN LIGHT
- EXIT SIGN
- SUSPENDED LINEAR STRIP LIGHT
- EXTERIOR WALL MOUNTED FIXTURE

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
REFLECTED CEILING PLAN

Sheet Number:
A-130

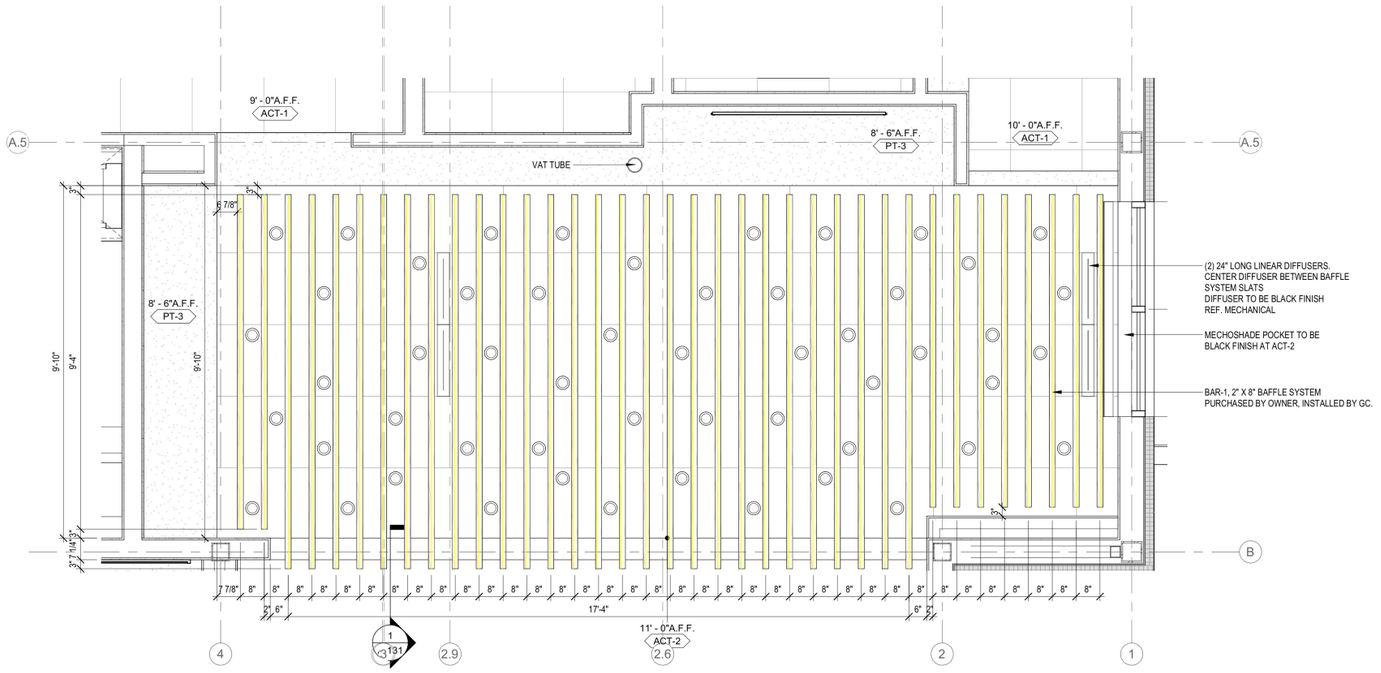

ENLARGED RCP @ TRANSACTION BAFFLES | 1/2" = 1'-0" | 5

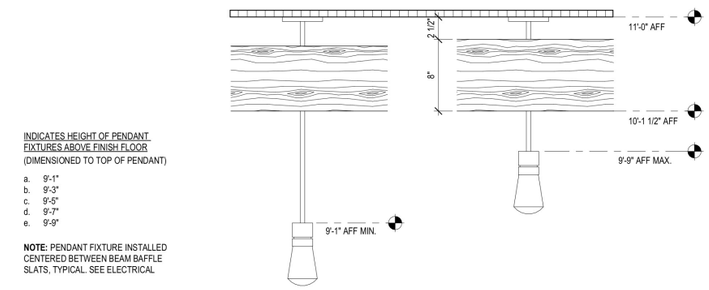

PENDANT HEIGHTS @ BAFFLE | 1 1/2" = 1'-0" | 3

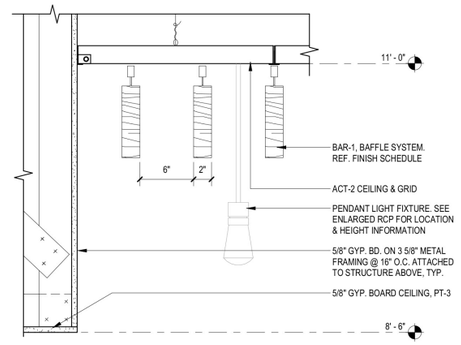

BAFFLE CEILING DETAIL | 1 1/2" = 1'-0" | 2

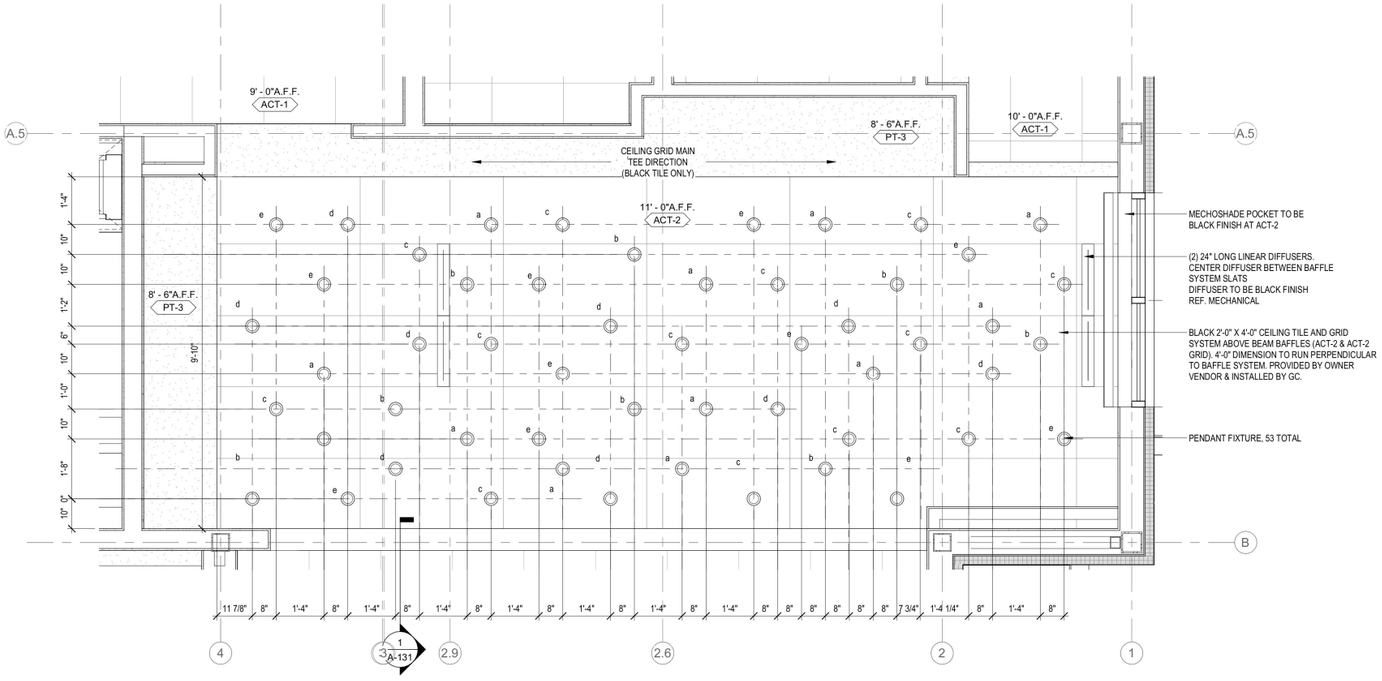

ENLARGED RCP @ TRANSACTION PENDANTS | 1/2" = 1'-0" | 4

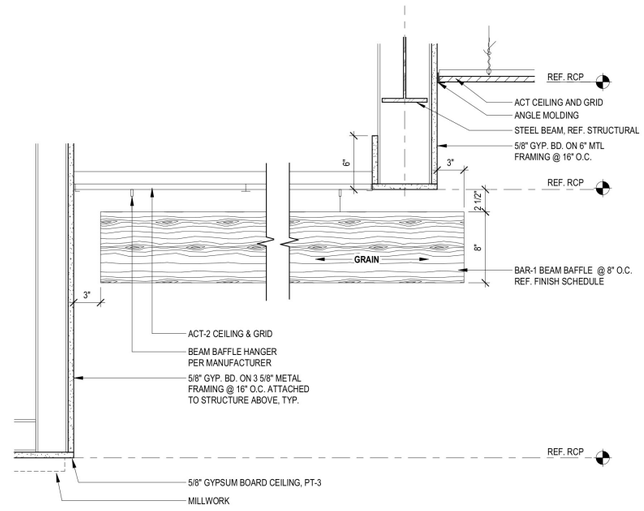

BAFFLE CEILING AT BULKHEAD | 1 1/2" = 1'-0" | 1

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
ENLARGED REFLECTED CEILING PLAN

Sheet Number:
A-131

2"x8" BAFFLE SYSTEM - BAR-1 **370.8 FT**

7/2/2026 8:37:48 PM

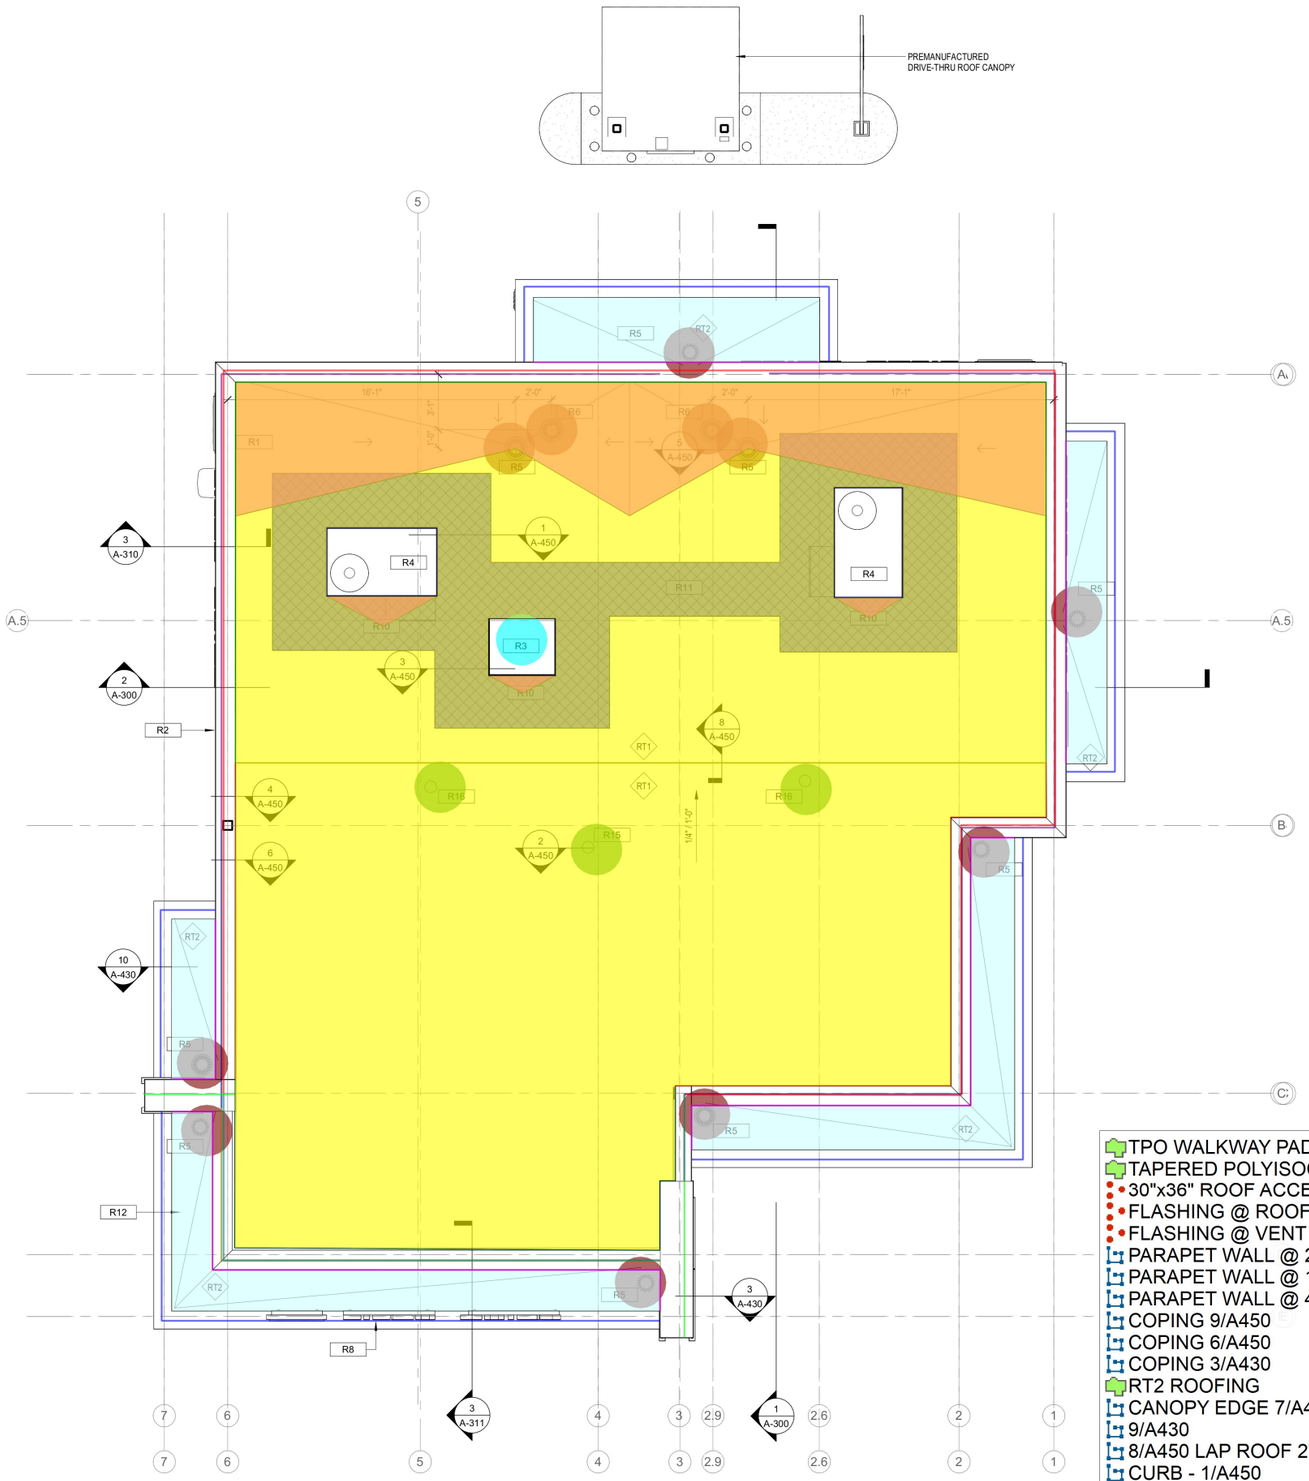

GENERAL NOTES - ROOF PLAN

1. ROOF CRICKETS 1/4" PER FOOT MINIMUM, FULLY TAPERED POLYISOCYANURATE INSULATION
2. INSTALL ALL ROOF SYSTEMS AND RELATED COMPONENTS IN STRICT ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS AND INSTALLATION INSTRUCTIONS
3. VERIFY AND COORDINATE LOCATION OF ALL ROOF PENETRATIONS WITH STRUCTURAL, MECHANICAL, ELECTRICAL, AND PLUMBING.
4. ALL ROOF PENETRATIONS REQUIRE PRESSURE TREATED 2x6 BLOCKING AT INSULATION AROUND ENTIRE PERIMETER FOR FLASHING ATTACHMENT.
5. OMISSION OF ANY ACCESSORY FROM THE ROOF PLAN SHALL NOT RELIEVE THE CONTRACTOR FROM THE RESPONSIBILITY FOR SUCH ITEMS.

KEY NOTES - ROOF PLAN

R1	WEATHER SENSOR, REF. LANDSCAPE
R2	CONT. METAL COPING TO COVER ENTIRE TOP OF PARAPET
R3	30" x 36" ROOF ACCESS HATCH
R4	MECHANICAL ROOF TOP UNIT
R5	ROOF DRAIN
R6	OVERFLOW ROOF DRAI
R7	RESERVED
R8	MAIN ENTRY CANOPY MOUNTED SIGNAGE
R9	RESERVED
R10	TAPERED INSULATION / ROOF CRICKETS POSITIVE SLOPE TOWARDS DRAIN
R11	HATCH INDICATES TPO WALKWAY PAD MEMBRANE
R12	PRE-FINISHED ALUMINUM COMPOSITE CLAD AWNING, ACM-3
R15	VENT STACK. REFER TO PLUMBING DRAWINGS FOR LOCATION
R16	NO VENT STACK SHALL BE LOCATED WITHIN 10'-0" RADIUS OF AN RTU INTAKE. COORDINATE WITH MECHANICAL.

ROOF TYPES

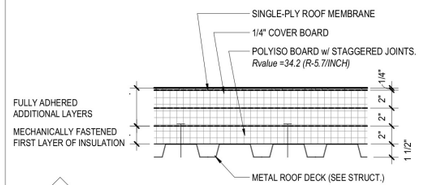

RT1 — ROOF MEMBRANE SYSTEM OVER SLOPED METAL ROOF DECK (SEE STRUCT)
(6" MIN INSULATION THICKNESS) R-VALUE = 34
NOTE: SEE ROOF PLAN FOR TAPERED INSULATION LOCATIONS

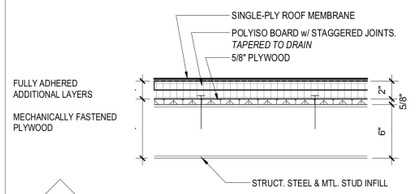

RT2 — ROOF MEMBRANE SYSTEM OVER FLAT ROOF DECK (SEE STRUCT)
NOTE: TAPER INSULATION TO ROOF DRAIN, 1" MIN. INSULATION THICKNESS

TPO WALKWAY PAD MEMBRANE	286.8 SQ FT
TAPERED POLYISOCYANURATE INSULATION ROOF CRICKET	262.1 SQ FT
30"x36" ROOF ACCESS HATCH - 3/A450	1.0 EA
FLASHING @ ROOF DRAIN	11.0 EA
FLASHING @ VENT PIPE	3.0 EA
PARAPET WALL @ 2'7"H	38.0 FT
PARAPET WALL @ 1'7"H	46.0 FT
PARAPET WALL @ 4'7"H	96.6 FT
COPING 9/A450	38.5 FT
COPING 6/A450	148.1 FT
COPING 3/A430	13.9 FT
RT2 ROOFING	285.4 SQ FT
CANOPY EDGE 7/A430	138.5 FT
9/A430	119.4 FT
8/A450 LAP ROOF 2', INCL WALL	45.3 FT
CURB - 1/A450	39.9 FT
PARAPET LAP @ 2'1"H - 4,6/A450	43.3 FT
PARAPET LAP @ 1'H - 4,6/A450	56.5 FT
PARAPET LAP @ 3'6"H - 4,6/A450	87.8 FT
RT1 ROOFING	1864.3 SQ FT

NOTE: GRID NOT NORTH IS FOR REFERENCE PURPOSES ONLY. REFER TO SURVEY FOR TRUE NORTH AND SITE ORIENTATION AS IT RELATES TO THIS PLAN.

ROOF PLAN | 1/4" = 1'-0" | 1

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
ROOF PLAN

Sheet Number:
A-140

7/8/2026 2:37:50 PM

GENERAL NOTES - FINISH PLAN

A. CONTRACTOR TO PHYSICALLY RECHECK ALL MEASUREMENTS PROVIDED IN DRAWINGS.

B. FIELD VERIFICATION IS REQUIRED FOR QUANTITIES OF ALL MATERIALS PRIOR TO ORDERING AND INSTALLING. (DO NOT SCALE DRAWINGS).

C. WHEN A CHANGE IN FLOOR FINISH OCCURS AT DOORWAY, THE SEAM IS TO BE CENTERED UNDER THE DOOR UNLESS OTHERWISE INDICATED.

D. THRESHOLDS/TRANSITION STRIPS MUST BE PROVIDED BETWEEN DIFFERING FLOORING MATERIALS. SAMPLES MUST BE PROVIDED TO DESIGNER FOR APPROVAL PRIOR TO ORDERING AND INSTALLING.

E. CONTRACTOR TO ENSURE ALL EXISTING WALLS AND FLOORS ARE PROPERLY PREPARED FOR INSTALLATION OF SPECIFIED MATERIALS. PATCH AND REPAIR AS NECESSARY, READY TO RECEIVE NEW FINISH (CARPET, PAINT LAMINATE, RESILIENT FLOORING, ETC.)

F. ALL FLOORING TO HAVE MANUFACTURER'S RECOMMENDED FINISH APPLIED AFTER INSTALLATION AND PROPER CARE AND MAINTENANCE INSTRUCTIONS TO BE ISSUED TO THE CLIENT.

G. PAINTING: ALL SURFACES TO RECEIVE ONE COAT PRIMER, TWO COATS PAINT. PROVIDE SAMPLES TO DESIGNER FOR APPROVAL FOR COLOR VERIFICATION PRIOR TO PROCEEDING WITH WORK. ALL PAINT TO BE BENJAMIN MOORE OR EQUAL. ALL DOORS AND FRAMES, TRIM TO BE LATEX SEMI-GLOSS, ALL CEILINGS TO BE FLAT, ALL WALLS TO BE EGGSHELL.

H. ENSURE SURFACES TO RECEIVE FINISHES ARE CLEAN, TRUE AND FREE OF IRREGULARITIES. DO NOT PROCEED WITH WORK UNTIL SATISFACTORY CONDITIONS HAVE BEEN CONFIRMED.

I. CONTRACTOR TO USE THIS PLAN IN CONJUNCTION WITH ALL OTHER PLANS AND ELEVATIONS TO DETERMINE LOCATIONS OF DIFFERENT MATERIALS AND FINISHES. ALL FINISHES TO MEET LOCAL BUILDING CODE REQUIREMENTS.

J. PROVIDE 1 PRIMER COAT AND 2 FINISH COATS MINIMUM.

K. THERE ARE TO BE NO SUBSTITUTIONS OF ANY SPECIFIED MATERIALS/FINISHES WITHOUT THE WRITTEN APPROVAL OF BDG ARCHITECTS, LLP. ANY UNAUTHORIZED CHANGES WILL BE REFINISHED AS SPECIFIED AT CONTRACTOR'S EXPENSE.

L. ALL MATERIALS INDICATED ON THIS CHART WERE AVAILABLE AT TIME OF SPECIFYING, BDG ARCHITECTS, LLP DOES NOT GUARANTEE SUPPLY IF NOT ORDERED IMMEDIATELY UPON AWARD OF CONTRACT BY THE GENERAL CONTRACTOR AND/OR SUBCONTRACTORS. DELAYS RESULTING FROM FAILURE TO DO SO WILL BE THE RESPONSIBILITY AND AT THE EXPENSE OF THE SAID TRADE. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THAT ALL INSTALLED/APPLIED MATERIALS CORRESPOND WITH THE DESIGNER'S SAMPLES AND ARE CONSISTENT IN SHAPE AND COLOR AS APPROVED. CONSULT DESIGNER FOR CLARIFICATION.

M. ALL FABRICS AND MATERIALS MUST HAVE APPROPRIATE FLAME SPREAD RATINGS AS PER OBC REQUIREMENTS. GENERAL CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL CERTIFICATES OF COMPLIANCE AND SUBMITTING THEM TO LOCAL BUILDING AUTHORITIES AND COPY TO CLIENT.

N. PROVIDE LEVEL 5 FINISH WHERE FILM IS APPLIED TO WALL. COORDINATE WITH VENDOR ON CURING TIME PRIOR TO APPLICATION OF FILM.

O. CONTRACTOR IS RESPONSIBLE TO OBTAIN MANUFACTURER'S WRITTEN SPECIFICATIONS AND/OR DESIGNER'S SPECIAL INSTRUCTIONS PRIOR TO INSTALLATION. APPLICATIONS OF MATERIALS AND TO INSTALL/APPLY THEM ACCORDINGLY IS THE CONTRACTOR'S RESPONSIBILITY. ONLY MATERIALS APPROVED IN WRITING BY THE DESIGNER ARE ALLOWED ON SITE

P. ANY SUBSTITUTION OF MATERIALS TO ACCELERATE THE WORK DURING CONSTRUCTION REQUIRES PRIOR WRITTEN APPROVAL OF BOTH THE OWNER AND THE DESIGNER

Q. BDG ARCHITECTS, LLP CANNOT BE HELD RESPONSIBLE FOR THE MANNER OF SUPPLY AND INSTALLATION/APPLICATION OF MATERIALS IF OTHER THAN SPECIFIED BY SAME AND/OR MANUFACTURER

KEY NOTES - FINISH PLAN

F001	FLOOR TRANSITION BETWEEN CARPET AND TILE. TRANSITION TO ALIGN TO VERTICAL PANEL OF ADA LOCATION OF TRANSACTION BAR.
F002	FLOOR TRANSITION AT MEETING ROOM CARPET TO FLOOR TILE. REFER TO THRESHOLD DETAIL @ DIRTT DOOR
F003	FLOOR TRANSITION BETWEEN BOOTH CARPET AND FIELD TILE. FLOORING TRANSITION TO ALIGN TO INTERIOR FACE OF MILLWORK PANEL IN THE BOOTH.
F004	GC TO PROVIDE FLOORING TRANSITIONS TO CONFORM TO CHANGES IN LEVEL BETWEEN 1/4 INCH AND 1/2 INCH MUST BE BEVELED AT 1:2 OR LESS. 1/4 INCH IS THE MAXIMUM VERTICAL RISE.

LEGEND - FINISH PLAN

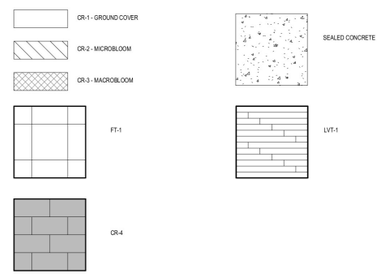

CON-1 FLOORING	68.8 SQ FT
CR1 FLOORING	131.4 SQ FT
CR2 FLOORING	435.7 SQ FT
CR3 FLOORING	27.1 SQ FT
CR4 FLOORING	82.4 SQ FT
FINISH	1.0 EA
FT1 FLOORING	946.1 SQ FT
FTS-4 TRANSITION	10.0 FT
FTS1 TRANSITION	51.6 FT
FTS2 TRANSITION	29.0 FT
LVT1 FLOORING	94.0 SQ FT
MAT-1 FLOORING	6.0 SQ FT
FTS3 TRANSITION	12.2 FT
WC1 @ 12'H	10.1 FT
WB-1	404.7 FT
PT1 PAINT @ 12'H	62.6 FT
PT1 PAINT @ 11'H	15.0 FT
PT1 PAINT @ 8'6"H	39.7 FT
PT1 PAINT @ 6'6"H	4.9 FT
PT1 PAINT @ 10'H	51.8 FT
PT1 PAINT @ 9'H	117.1 FT
PT1 PAINT @ 12'6"H	48.0 FT
PT7 @ 10'	10.3 FT
PT8 @ 10'	7.4 FT
WALL COVERING @ 10'H ABOVE PT7	10.3 FT
PT4 @ 9'H	5.3 FT
FRP-1 @ 4'H	4.0 FT
PT4 @ 10'H	10.6 FT

THRESHOLD DETAIL @ DIRTT DOOR | 3/4" = 1'-0" | 5

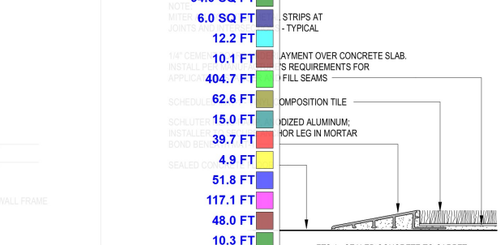

FTS 4 - SEALED CONCRETE TO CARPET

TION: FTS-4 | 6" = 1'-0" | 4

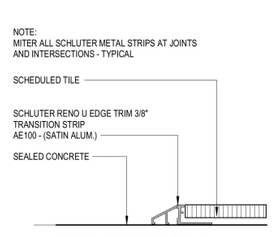

FTS 3 - CONCRETE TO TILE TRANSITION

FLOOR TRANSITION: FTS-3 | 6" = 1'-0" | 3

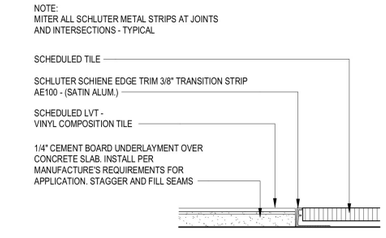

FTS 2 - VINYL TILE PLANK TO TILE

FLOOR TRANSITION - FTS-2 | 6" = 1'-0" | 2

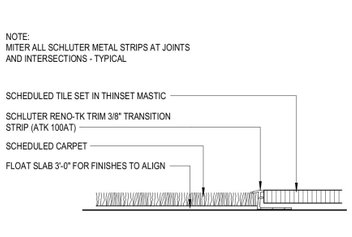

FTS 1 - CARPET TO TILE

FLOOR TRANSITION: FTS-1 | 6" = 1'-0" | 1

FINISH PLAN | 1/4" = 1'-0" | 6

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
FINISH PLAN

Sheet Number:
A-150

AE02	1.0 EA
AE03	1.0 EA
AE04	1.0 EA
AE06	1.0 EA
AE07	1.0 EA
SS01	2.0 EA
TB01	1.0 EA
CH01	2.0 EA
CH11	4.0 EA
CH02	2.0 EA
TB02	2.0 EA
PL02	2.0 EA
SS03	1.0 EA
CH06	2.0 EA
CH10	2.0 EA
CH03	2.0 EA
TB04A	1.0 EA
CH04	3.0 EA
WS01	1.0 EA
CH07	1.0 EA
ST02?	1.0 EA
CH08	1.0 EA

FURNITURE & EQUIPMENT PLAN | 1/4" = 1'-0" | 1

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303

404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
FURNITURE & EQUIPMENT

Sheet Number:
A-160

APPLIANCE SCHEDULE

ITEM #	DESCRIPTION	MFR	MODEL #	PROV. BY	INST. BY	LOCATION	COMMENTS
AE-01	MICROWAVE DRAWER	SHARP	SMD3070ASY	GC	GC	EMPLOYEE LOUNGE	
AE-02	MICROWAVE	GE	GCST11X1WSS	GC	GC	EMPLOYEE LOUNGE	1.1 Cu. Ft. CAPACITY COUNTERTOP, STAINLESS STEEL
AE-03	REFRIGERATOR	WHIRLPOOL	WRFC2036RZ	GC	GC	EMPLOYEE LOUNGE	COUNTER-DEPTH FRENCH DOOR BOTTOM MOUNT, STAINLESS STEEL, INTERIOR WATER DISPENSER. ALT: KITCHENAID KRFC300ESS
AE-04	DISHWASHER	GE	PDT145SGL/SS	GC	GC	EMPLOYEE LOUNGE	18" ADA COMPLIANT, SS FINISH. HAIER QDT125SSL ACCEPTABLE SUB.
AE-06	QUENCH	QUENCH	Q6CT	GC	GC	SERVICE	TOUCHLESS BOTTLELESS WATER COOLER
AE-07	COFFEE MAKER	KEURIG	K4500	VENDOR	GC	SERVICE	
AE-09	TV	NEC	V984Q-C981Q 98" DISPLAY	VENDOR	VENDOR	TECH WALL	
AE-10	TV	NEC	V654Q 65"	VENDOR	VENDOR	BACK COUNTER	
AE-11	TV WALL MOUNT	PEERLESS	DS-VW795-QR	VENDOR	VENDOR	TECH WALL	
AE-12	TV WALL MOUNT			VENDOR	VENDOR	BACK COUNTER	
AE-13	SECURITY MONITOR			VENDOR	VENDOR	WORKROOM	
AE-14	IPAD CHARGING CABINET	BELKIN	B2B074	VENDOR	VENDOR	WORKROOM	18" x14" x 7". PROVIDE POWER IN BASE CABINET
AE-15	MULTI-FUNCTION PRINTER (MFP)	HP	J8A13A	VENDOR	VENDOR	VARIES	HP COLOR LASERJET ENTERPRISE FLOW MFP M681Z (PRODUCT #J8A13A)

BANK EQUIPMENT SCHEDULE

ITEM #	DESCRIPTION	MFR	MODEL #	PROV. BY	INST. BY	LOCATION	COMMENTS
BE-01	CASH CHEST/ND COMBO	HAMILTON	20-132L OR 20-132R	VENDOR	VENDOR	WORKROOM	PROVIDE HOUSEKEEPING PAD AT WALK-UP LOCATIONS
BE-02	CASH CHEST	HAMILTON	20-113R OR 20-113L	VENDOR	VENDOR	WORKROOOM	
BE-03	WALK-UP NIGHT DEPOSIT	HAMILTON	17-014 L	VENDOR	VENDOR	VARIES	
BE-03a	DRIVE-UP NIGHT DEPOSIT	HAMILTON	16-098R OR 16-098L	VENDOR	VENDOR	VARIES	
BE-04	THRU-WALL VAT	HAMILTON	PER VENDOR	VENDOR	VENDOR	VARIES	
BE-05	WALK-UP THRU WALL ATM	DIEBOLD / NIXDORF	DN SERIES 450	VENDOR	VENDOR	VARIES	
BE-06a	CASH RECYCLER	NAUTILUS HYOSUNG	MS500	VENDOR	VENDOR	TRANSACTION	
BE-6b	CASH RECYCLER	ARCA	VERO	VENDOR	VENDOR	TRANSACTION	
BE-6c	CASH RECYCLER	GLORY GLR	GLR100	VENDOR	VENDOR	TRANSACTION	
BE-07	PHONE	CISCO	7841	VENDOR	VENDOR	TRANSACTION	
BE-08	UNDERCOUNTER STEEL	CONVERGINT	FENCO #212	VENDOR	VENDOR	TRANSACTION	
BE-09	UNDERCOUNTER STEEL	CONVERGINT	FENCO S-222 OR S-622	VENDOR	VENDOR	WORKROOM	
BE-10	VAT TUBE SYSTEM	HAMILTON	HA1000-XLR	VENDOR	VENDOR	EXTERIOR	
BE-11	DRIVE-UP ATM	DIEBOLD / NIXDORF	SERIES 490	VENDOR	VENDOR	EXTERIOR	

FURNITURE SCHEDULE

ITEM #	DESCRIPTION	MANUFACTURER	DIMENSIONS	MODEL	COLOR
CH-01	TOTO CHAIR	BOSS DESIGN	23.5"W x 23"D x 32"H x 18.25"SH	TOT/3/HB	OAK LEGS ON WHITE CHASSIS
CH-02	BOMBOM	BERNHARDT	34.25"W x 30.25"D x 30"H x 19.25"H	1076K	BASE: MATTE BLACK
CH-03	MERANO CHAIR ARMLESS	GRAND RAPIDS	17"W x 17"D x 31"H x 18"SH	W400SC	ACORN WOOD FINISH ON BEECH
CH-04	LAVA	BERNHARDT	27.25"W x 22"D x 33.25"-37.25"H x 17.75-22"SH	594	SHEL: MIST
CH-05	TOTO CHAIR	BOSS DESIGN	23.5"W x 23"D x 32"H x 18.25"SH	TOT/3/HB	AMERICAN BLACK WALNUT. LEGS ON BLACK CHASSIS
CH-06	TBD	TBD			
CH-07	TOTO CHAIR	BOSS DESIGN	23.5"W x 23"D x 32"H x 18.25"SH	TOT/3/HB	OAK LEGS ON WHITE CHASSIS
CH-08	MAVIC	SITONIT	23.5"W x 23.5"D x 35.4"D x 17.5"-21.5"SH	1113.T	FRAME/BASE: FOG
CH-09	BAHKITA	GLOBAL	18"W x 21"D x 35.4" x 17.5"-21.5"SH	6751	PLASTIC: ALLOY
CH-10	MOVI STOOL	SITONIT	26"W x 26"D x 37.75"H x 21.5"-28.5"SH	1062 FT3 S21	FRAME/BASE: FOG
CH-11	MERANO	GRAND RAPIDS	17"W x 14"D x 29"H x 30"SH	W400BS	ACORN WOOD FINISH ON BEECH
CS-01	CHARGE STATION	GLOBAL INDUSTRIAL	17.5"W x 20"D x 13.5"H	WBB1963653	BLACK
LK-01	LOCKERS	GREAT OPENINGS	16"W x 12"D x 72"H	C100077	WILSONART LINEN LAM
MS-01	PHONE ROOM PEDESTAL	STEELCASE	22.75"H x 15.5"W x 22.5"D	18-0101712	CUSHION COLOR: TBD
MS-03	PLANTER	THE CHANDLER COMPANY	48"L x 12"W x 30"H	CN481830	WHITE: SMOOTH FINISH
PD-01	PENCIL - ACCY	GREAT OPENINGS	21.75"W x 17.25"D x 2.125"H	NFC7657889	BLACK
PL-01	ROO	OFS	17.5"D x 29"H	RO-29PS	ROOT
PL-02	PLANTER	THE PLANT TROLLEY	48"W x 12"D x 28"H (CAN VARY)	LARGE PLANTER	CHARCOAL GREY STAIN. SEMI-GLOSS
PT-01	THREAD	STEELCASE	30"H	PFLHUB	MERLE
PW-01	BOOTH PILLOW; BEDFORD	PALLAS TEXTILES	18" x 18"	PILLOW	JENS
PW-02	BOOTH PILLOWS; DBL STITCH	HBF	18" x 18"	PILLOW	VERT
PW-03	BOOTH PILLOWS; HERITAGE	ARCHITEX	18" x 18"	PILLOW	ROYAL
SH-03	CRATE DIVIDE 3 BAY	ALLERMUIR	53"W x 18"D x 70.5"H	CRT2H3BS	FRAME: BLACK. BASE/SHELVES: BLACK
SH-04	CRATE DIVIDE 4 BAY	ALLERMUIR	70.25"W x 18"D x 70.5"H	CRT2H4BS	FRAME: BLACK. BASE/SHELVES: BLACK
SH-06	CRATE DIVIDE 6 BAY	ALLERMUIR	106"W x 18"D x 70.5"H	DQ-CRT2H6BS	FRAME: BLACK. BASE/SHELVES: BLACK
SH-08	CRATE DIVIDE 8 BAY	ALLERMUIR	142"W x 18"D x 70.5"H	DQ-CRT2H8BS	FRAME: BLACK. BASE/SHELVES: BLACK
SS-01	RAFT SOFA	BOSS DESIGN	26.25"D x 26.25"W x 20.25"-29"H	RAFT 1 FB	LEGS: POLISHED METAL
SS-02L	LUCA 45 LEFT ARM	BERNHARDT	86.25" x 44.5"D x 29.5"H x 16.5' SH	8D33L	BASE: BLACK
SS-02R	LUCA 45 RIGHT ARM	BERNHARDT	86.25" x 44.5"D x 29.5"H x 16.5' SH	8D33R	BASE: BLACK
SS-03A	LUCA 2 SEAT	BERNHARDT	66.5"W x 33.25"D x 29.5"H x 16.5"SH	8D25N	BASE: MATTE BLACK
SS-03B	LUCA 3 SEAT	BERNHARDT	95.75"W x 33.25"D x 29.5"H x 16.5"SH	8D27N	BASE: MATTE BLACK
SS-04L	LUCA LEFT ARM W/TABLE	BERNHARDT	90.25"W x 33.25"D x 29.5"H x 16.5"SH	8D26L	BASE: MATTE BLACK. TABLE: 861 WALNUT
SS-04R	LUCA RIGHT ARM W/TABLE	BERNHARDT	90.25"W x 33.25"D x 29.5"H x 16.5"SH	8D26R	BASE: MATTE BLACK. TABLE: 861 WALNUT
SS-05	TBD	TBD			
SS-06	ORAI	ALLERMUIR	101.5"W x 33.5"D x 27"H x 17"SH	OR1300	FRAME: BLACK POWDER COAT
SS-07A	RAFT SOFA	BOSS DESIGN	26.25"D x 26.25"W x 29"H x 18"SH	RAFT 1 FB	LEGS: POLISHED METAL
SS-07B	RAFT SOFA	BOSS DESIGN	26.25"D x 52.75"W x 29"H x 18"SH	RAFT 2 RB	LEGS: POLISHED METAL
ST-01	TRACE	GREAT OPENINGS	36"W x 18.25"D x 51.5"H (CAN VARY)	RG-D103 (VARIES)	PAINT: MILK
ST-02	SLIM PED W/ CUSHION	GREAT OPENINGS	12"W x 18 7/8"D x 21"H	STU 5640C	PAINT: MILK
ST 03	STAKS	OFS	36"W x 16.5"D x 27.875"H (CAN VARY)	6 NW3617MPD2 (VARIES)	CREDENZA: STEEL LAMINATE
ST-04	YAHEETECH	AMAZON	12.6"W x 11.8"D x 34.25"H	YAHEETECH	WHITE
TB-01	INTERMIX/STAKS	OFS	72"W x 36"D x 1"H	VARIES	LAMINATE: FROSTY WHITE. COLUMN PAINT: LUSTER GREY
TB-02	LUCA	BERNHARDT	18" DIA x 23"H	LUS-LDT-BK-WLT	TOP: WALNUT 861. BASE: MATTE BLACK PAINT
TB-03A	LUCA	BERNHARDT	30" DIA x 16"H	LUS-XDM-BK-WLT	TOP: WALNUT 861. BASE: MATTE BLACK PAINT
TB-03B	LUCA	BERNHARDT	36" DIA x 16"H	LUS-ADM-BK-WLT	TOP: WALNUT 861. BASE: MATTE BLACK PAINT
TB-03C	LUCA SMALL CLUSTER	BERNHARDT	36" DIA x 16"H + 30" DIA 18"H	VARIES	TOP: WALNUT 861. BASE: MATTE BLACK PAINT
TB-03D	LUCA LARGE CLUSTER	BERNHARDT	22"DIA x 14"H	30"DIA x 14"H & 42" DIA x 16"H	VARIES
TB-04A	ROUND TOP/J87 BASE	FALCON	30" DIA	1333/J87	TOP: DESIGNER WHITE LAM. BASE SILVERSTONE
TB-04B	ROUND TOP/J87 BASE	FALCON	36" DIA	1333/J87	TOP: DESIGNER WHITE LAM. BASE SILVERSTONE
TB-05A	BLUEPRINT 1900N	BERNHARDT	66"W x 30"D x 42"H	BPX-01FNW-CCSQXXX	TOP: FROSTY WHITE LAM. BASE: PAINTED VENEER
TB-05B	BLUEPRINT 1900S	BERNHARDT	72"W x 36"D x 42"H	BPX-01BOM-CCSQXXX	TOP: FROSTY WHITE LAM. BASE: PAINTED VENEER
TB-05C	BLUEPRINT TABLE	BERNHARDT	84"W x 36"D x 42"H		TOP: FROSTY WHITE LAM. BASE: PAINTED VENEER
TB-05D	BLUEPRINT 2400+	BERNHARDT	108"W x 36"D x 42"H	BPX-01BEL-CCSQZ02	TOP: FROSTY WHITE LAM. BASE: PAINTED VENEER
TB-06	SWAP TOP / ZOLA TOP	GLOBAL + MOCKETT LEG	24"x30"	GSBTP2430 / TL53 94	TOP: DESIGNER WHITE LAM. BASE: SATIN ALUMINUM
TB-07	SWAP TOP / ZOLA TOP	GLOBAL + MOCKETT LEG	30"x48"	EX200268 / TL53 94	TOP: DESIGNER WHITE LAM. BASE: SATIN ALUMINUM
TB-08	CHECK WRITING STAND	MILLWORKER			SEE SHEET A-708 FOR DETAILS
WD-01	CONNECT X2	CLARIDGE	36"x48" (CAN VARY)	MULTIPLE	GLASS: WHITE. CORKBOARD: BLUEBERRY & GRAPHITE
WS-01	WORKSTATION	OFS	OVAL TOP: 42"D x 9'W OR 10'W (VARIES)	VARIES	TOP: FROSTY WHITE
WS-02	FLEX DESKS	STEELCASE	58"W x 29"D x 22.75"-48.5"H	FLXERQ	LAMINATE: MILK

FINISHES SCHEDULE

ITEM	DESCRIPTION	MANUF.	SIZE	SERIES	COLOR	REMARKS
CEILINGS						
ACT-1	ACOUSTICAL CEILING TILE	USG	24" x 24" x 7/8"	88135 - MARS HIGH NRC	FLAT WHITE 050	SLT EDGE, 0.85 NRC / 35 CAC
ACT-1 GRID	ACOUSTICAL CEILING GRID	USG	DX 15/16"	DONN BRAND DX/DXL	FLAT WHITE 050	
ACT-2	ACOUSTICAL CEILING TILE	ARMSTRONG	24" x 48" x 5/8"	1729 - FINE FISSURED	TECH BLACK (BL)	SQUARE LAY-IN 15/16", 0.55 NRC / 35 CAC
ACT-2 GRID	ACOUSTICAL CEILING GRID	GORDON	2" x 15/16"	ENVIRONMENTAL GRID MT-7/CT-7 GRID WA-2 WALL ANGLE	POWDER COATED PDR60403 NIGHTSHADE BLACK	PROVIDED BY SOUTHEASTERN ARCHITECTURAL SYSTEMS (SEAS). SEAS CONTACT: AUSTIN CLAYTOR, 704.896.5805 austin@seas-tr.com
BAR-1	BEAM BAFFLE	SEAS	2" x 8"	.040" ALUMINUM BEAMS	DARK WOOD II	
GWB-1	PAINTED GYP.	-	-		PT-3	
MECHO	MOTORIZED MECHOSHADE	MECHOSHADE		THERMOVEIL DENSE BASKET WEAVE 1300 SERIES	1319: SILVER BIRCH	5% OPEN, CONTACT LOCAL REP: WHITLIE NOCK EMAIL: WHITLIE.NOCK@MECHOSHADE.COM
DOOR FINISHES						
SCW	STAINED DOOR	OSHKOSH	-	DESIGNER COLOR SERIES	SLICED WHITE BIRCH; FINISH: AWI TR8:600 COLOR: 9133D	OSHKOSH PLATINUM PARTNER *NO SUBSTITUTIONS* CONTACT: VICKY TREU-CRAM, EMAIL: VTREUCRAM@OSHKOSHDOOR.COM
FLOOR FINISHES						
CR-1	CARPET	MOHAWK	12" x 36"	LICHEN COLLECTION	STONE COMMUNITY (GT472) 949 STONE	INTALLATION: HALF LAP
CR-2	CARPET	MOHAWK	12" x 36"	LICHEN COLLECTION	MICRO BLOOM II (GT475) 975 FELTED FRINGE STONE FINISH	INTALLATION: HALF LAP
CR-3	CARPET	MOHAWK	12" x 36"	LICHEN COLLECTION	MACRO BLOOM II (GT474) 975 FELTED FRINGE FINISH	INTALLATION: HALF LAP
CR-4	WALK-OFF CARPET	MANNINGTON COMMERCIAL	18" x 36"	CHARGE	STYLE: CHARGE, COLOR: FLUID (32367)	INSTALLATION: HORIZONTAL BRICK ASHLAR
FT-1	CERAMIC TILE	FLORIDA TILE	24" x 24"	AVENTIS	VELVET	UNPOLISHED. GR-1 GROUT. CONTACT: FLORIDA TILE EMAIL: ERLANGER.ORDERS@FLORIDATILE.COM and AUSTIN.KLEIN@FLORIDATILE.COM
LVT-1	LUXURY VINYL TILE	INTERFACE	25cm x 1m	ON GRAIN 4.5mm	EARTHEN FORMS, COLOR: A03305 BESPOKE TIMBER	INSTALL PATTERN: ASHLAR w/ GLUED PERIMETER
LVT-2	LUXURY VINYL TILE	MOHAWK	12" x 24"	C0135 MATAYO PLUS STONE	COLOR: 972A SONIC SILVER STONE	
CON-1	SEALED CONCRETE	BENJAMIN MOORE	-	COROTECH HIGH PERFORMANCE	CLEAR ACRYLIC	
MT-1	ANTI-STATIC MAT	MATS INC.	36" x 48"	-	BLACK	ANTI STATIC/ANTI FATIGUE, COLOR: BLACK
TRANSITION STRIP						
FTS-1	TRANSITION STRIP	SCHLUTER	-	SCHIENE AE100	SATIN ALUMINUM	CARPET TO TILE
FTS-2	TRANSITION STRIP	SCHLUTER	-	SCHIENE AE100	SATIN ALUMINUM	VINYL TILE TO CERAMIC TILE
FTS-3	TRANSITION STRIP	SCHLUTER	-	RENO U AE100	SATIN ALUMINUM	TILE TO SEALED CONCRETE
FTS-4	TRANSITION STRIP	SCHLUTER	-	RENO-RAMP AERP	SATIN ALUMINUM	SEALED CONCRETE TO MAT
GROUT						
GR-1	GROUT	CUSTOM BUILDING		EPOXY	335 WINTER GRAY	TRANSACTION BAR & FLOOR TILE
GR-3	GROUT	CUSTOM BUILDING		EPOXY	543 DRIFTWOOD	SERVICE AREA, EMPLOYEE LOUNGE, RESTROOM WALLS
MILLWORK						
PL-1	PLASTIC LAMINATE	WILSONART	-	STANDARD LAMINATE	FLORENCE WALNUT 7993-38	FINE VELVET FINISH
PL-2	PLASTIC LAMINATE	WILSONART	-	STANDARD LAMINATE	MAGNOLIA 5012-60	MATTE FINISH FOR HORIZONTAL APPLICATION
PL-3	PLASTIC LAMINATE	WILSONART	-	STANDARD LAMINATE	MAGNOLIA 5012-19	LENO WEAVE FOR VERTICAL APPLICATION
PL-4	PLASTIC LAMINATE	NEVAMAR	-	STANDARD LAMINATE	WROUGHT IRON S6054	ARP(T-) FINISH
PL-5	PLASTIC LAMINATE	WILSONART	-	STANDARD LAMINATE	CRYSTAL D388-60	MATTE
PL-6	PLASTIC LAMINATE	WILSONART		STANDARD LAMINATE	LAPIS BLUE D417-60	LOCATED AT CHECK DESK
SLD-1	SOLID SURFACE	WILSONART	-	QUARTZ	NIWA Q1002	TRANSACTION BAR COUNTERTOP. CONTACT: AMANDA FORBES (205) 532-9500
PAINT						
PT-1	PAINT	SHERWIN WILLIAMS	-	PROMAR 200 HP ZERO VOC	SW9166 DRIFT OF MIST	EGGSHELL
PT-2	PAINT	SHERWIN WILLIAMS	-	PROMAR 200 HP ZERO VOC	SW9166 DRIFT OF MIST	SEMI-GLOSS
PT-3	PAINT	SHERWIN WILLIAMS	-	PROMAR 200 HP ZERO VOC	SW9166 DRIFT OF MIST	FLAT
PT-4	PAINT	BENJAMIN MOORE	-	REGAL SELECT	2066-10 BLUE	(TECH WALL) EGGSHELL, LEVEL 5 WALL FINISH
PT-5	PAINT	BENJAMIN MOORE	-	REGAL SELECT	2037-30 KELLY GREEN	SEMI-GLOSS
PT-6	PAINT	BENJAMIN MOORE	-	REGAL SELECT	1603 GRAPHITE	EGGSHELL
PT-7	PRIMER	SHIELDZ	-	UNIVERSAL WALLCOVERING	ROMAN PRO - 999 ULTRA PRIME	PRIMER (DRIES CLEAR), COORDINATE w/ OWNER VENDOR
PT-8	PAINT	BENJAMIN MOORE	-	REGAL SELECT INTERIOR PAINT	797 ATHENS BLUE	EGGSHELL
WALL TILE / COVERING						
WT-1	WALL TILE	ROCA	3" x 12"	FLOW	WHITE (FLOWH17-312)	GLOSS FINISH, MIX 60% TOP TRIM: SCHLUTER JOLLY J AE WITH INSIDE & OUTSIDE CORNER TRIM ACCESSORIES
WT-2	WALL TILE	ROCA	3" x 12"	FLOW	COSMIC SAPPHIRE (FLOCB09-312)	GLOSS FINISH, MIX 20%
WT-3	WALL TILE	MOSA	6" x 12"	MURALS	DARK ANTHRACITE #2 (30610-1530)	GLOSS FINISH
WT-8	BULLNOSE	ROCA	3" x 12"	FLOW	TENDER GRAY (FLOTG10-S4312)	BULLNOSE AS BASE
WT-9	WALL TILE	ROCA	3" x 12"	FLOW	TENDER GRAY (FLOTG10-312)	GLOSS FINISH, MIX 20% COVE TRIM: SCHLUTER DILEX-AHK 1S AE WITH INSIDE & OUTSIDE TRIM ACCESSORIES
WT-10	WALL TILE	SOUTH CYPRESS		PICKET	MIX BLUE	FLAGSHIP BRANCH ONLY Contact: Karen Royal 205.402.8130
WC-1	WALL COVERING	FORMULA	VARIES	VARIES BY FOCUS MARKET		Contact: Tyler Gilbert (205) 278-9622
FRP-1	FIBERGLASS REINFORCED PLASTIC	MARLITE	48" H	PEBBLED	P100 CLASSIC WHITE	JANITOR CLOSET WET WALLS
WALL BASE & TRIM						
WB-1	RUBBER BASE	JOHNSONITE	4"	TRADITIONAL WALL BASE	#48 GREY	CONTACT: KAREN ROYAL (205) 402-8130
PANEL SYSTEM						
PNL-1	BOOTH SCREEN	BIG APPLE VISUAL GROUP	SEE PLAN	-	PANEL SYSTEM	SIRAJ SAYEED siraj@bigapplegroup.com, (631) 881-5006

PRAXIS3

100 Peachtree St NW
Suite 1450
Atlanta, GA 30303

404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 34651
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
SCHEDULES

Sheet Number:
A-170

7/8/2026 2:37:56 PM