CURB INLET FILTER "PIGS IN BLANKET"

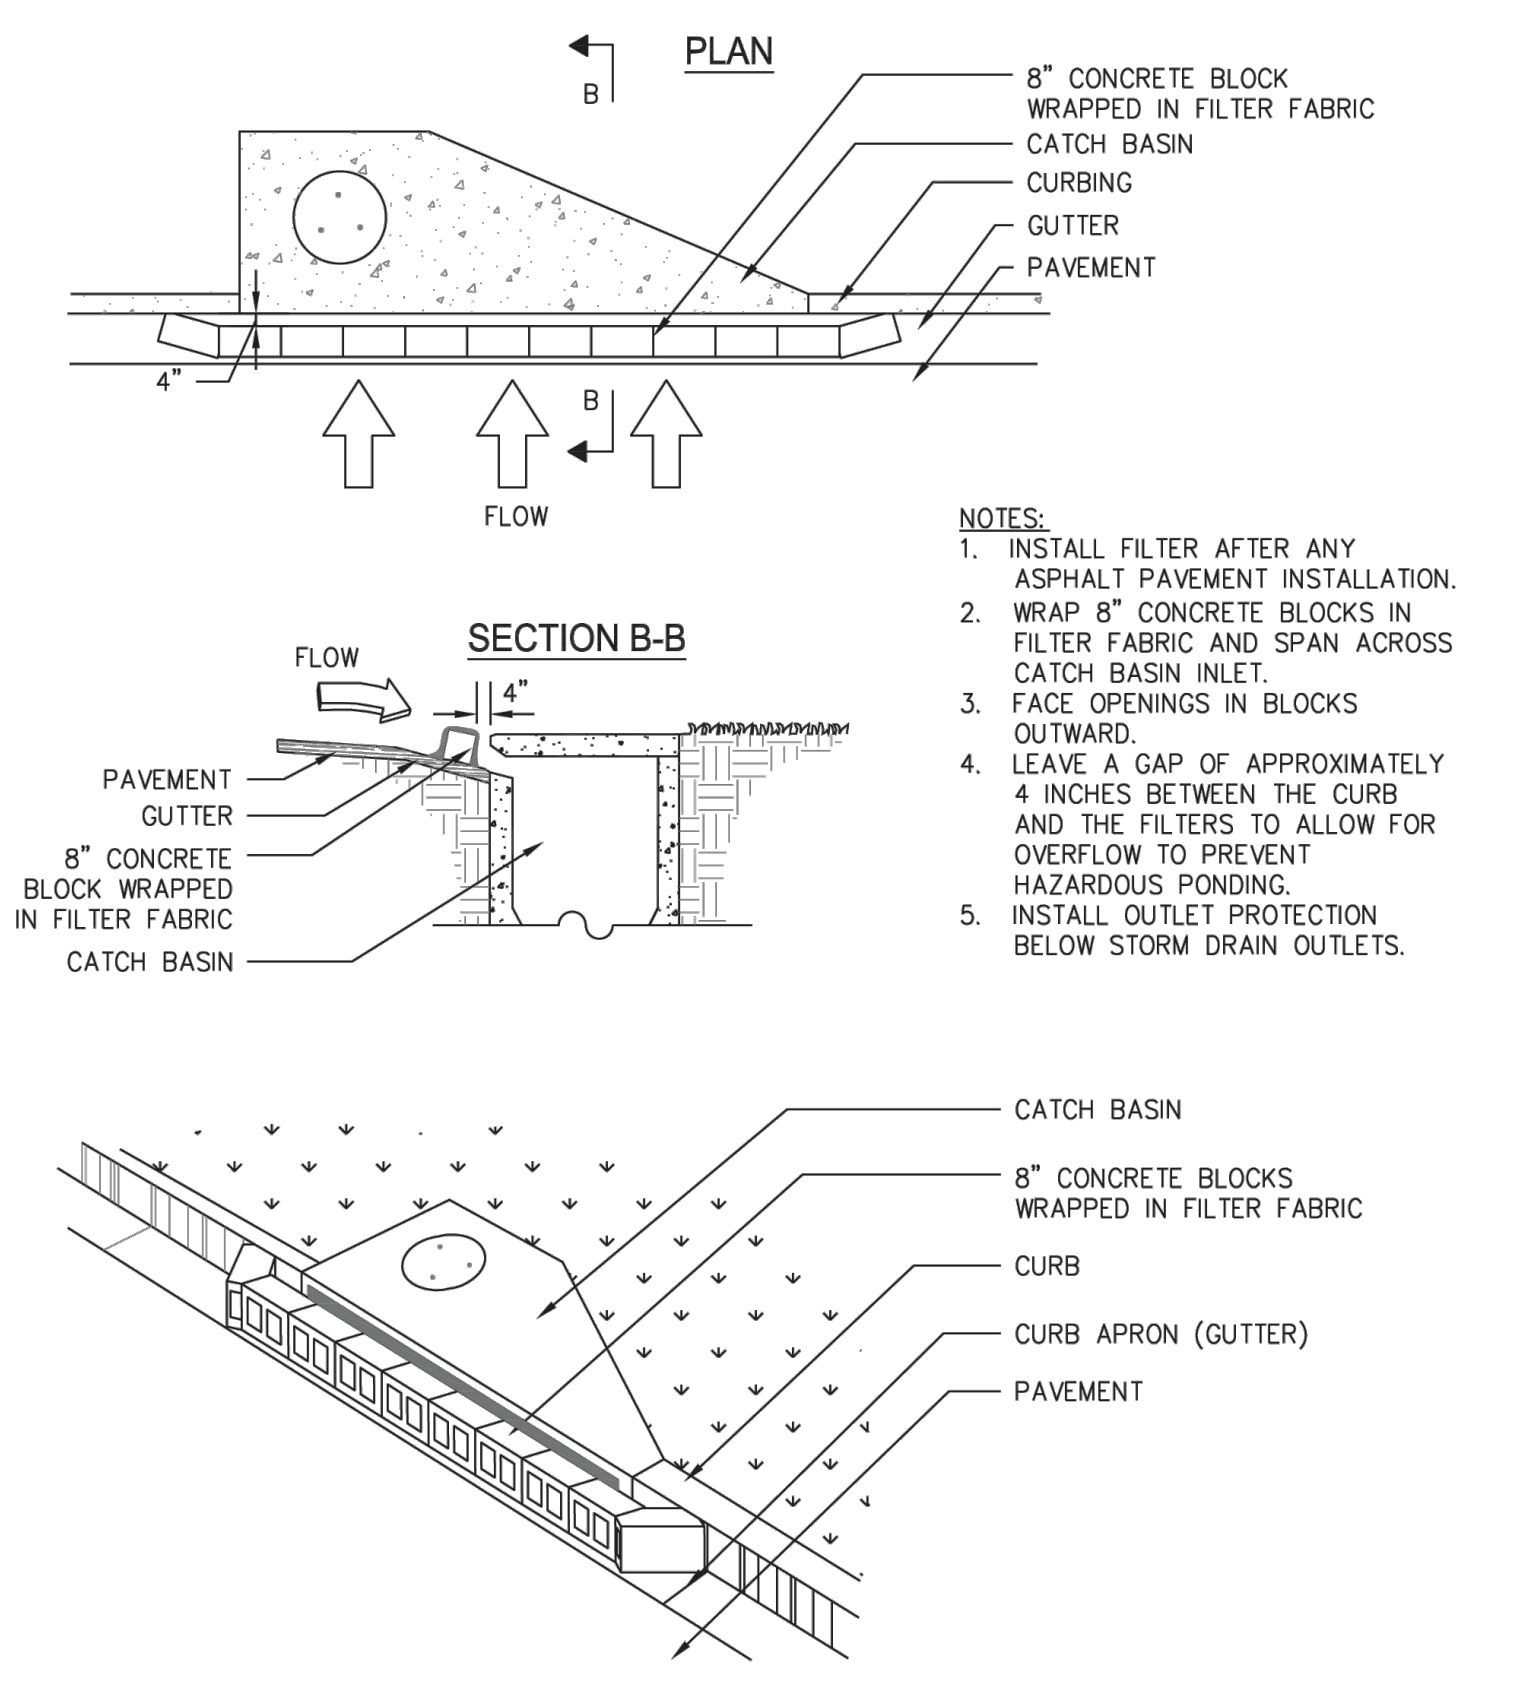
PLAN
B
8" CONCRETE BLOCK WRAPPED IN FILTER FABRIC
CATCH BASIN
CURBING
GUTTER
PAVEMENT
4"
FLOW
SECTION B-B
FLOW
4"
PAVEMENT
GUTTER
8" CONCRETE BLOCK WRAPPED IN FILTER FABRIC
CATCH BASIN
CATCH BASIN
8" CONCRETE BLOCKS WRAPPED IN FILTER FABRIC
CURB
CURB APRON (GUTTER)
PAVEMENT

NOTES:
1. INSTALL FILTER AFTER ANY ASPHALT PAVEMENT INSTALLATION.
2. WRAP 8" CONCRETE BLOCKS IN FILTER FABRIC AND SPAN ACROSS CATCH BASIN INLET.
3. FACE OPENINGS IN BLOCKS OUTWARD.
4. LEAVE A GAP OF APPROXIMATELY 4 INCHES BETWEEN THE CURB AND THE FILTERS TO ALLOW FOR OVERFLOW TO PREVENT HAZARDOUS PONDING.
5. INSTALL OUTLET PROTECTION BELOW STORM DRAIN OUTLETS.

Figure 6-28.6 Curb Inlet Filter "Pigs in Blanket"

6-154 GSWCC 2016 Edition

INLET SEDIMENT TRAP (Sd2-P)

Dust Control on Disturbed Areas

Du

DEFINITION

Controlling surface and air movement of dust on construction sites, roads, and demolition sites.

PURPOSE

- To prevent surface and air movement of dust from exposed soil surfaces.
- To reduce the presence of airborne substances that may be harmful or injurious to human health, welfare, or safety, or to animals or plant life.

CONDITIONS

This practice is applicable to areas subject to surface and air movement of dust where on and off-site damage may occur without treatment.

METHOD AND MATERIALS

A. Temporary Methods

Mulches. See standard **Ds1 - Disturbed Area Stabilization (With Mulching Only)**. Synthetic resins may be used instead of asphalt to bind mulch material. Refer to specification **Tac - Tackifiers**. Resins should be used according to manufacturer's recommendations.

Vegetative Cover. See specification **Ds2 - Disturbed Area Stabilization (With Temporary Seeding)**.

Spray-on Adhesives. These are used on mineral soils (not effective on muck soils). Keep traffic off these areas. Refer to specification **Tac - Tackifiers**.

Tillage. This practice is designed to roughen and bring clods to the surface. It is an emergency measure that should be used before wind erosion starts. Begin plowing on windward side of site. Chisel-type plows spaced about 12 inches apart, spring-toothed harrows, and similar plows are examples of equipment that may produce the desired effect.

Irrigation. This is generally done as an emergency treatment. Site is sprinkled with water until the surface is wet. Repeat as needed.

Barriers. Solid board fences, snowfences, burlap fences, crate walls, bales of hay and similar material can be used to control air currents and soil blowing. Barriers placed at right angles to prevailing currents at intervals of about 15 times their height are effective in controlling wind erosion.

Calcium Chloride. Apply at rate that will keep surface moist. May need retreatment.

B. Permanent Methods

Permanent Vegetation. See specification **Ds3 -Disturbed Area Stabilization (With Permanent Vegetation)**. Existing trees and large shrubs may afford valuable protection if left in place.

Topsoiling. This entails covering the surface with less erosive soil material. See specification **Tp - Topsoiling**.

Stone. Cover surface with crushed stone or coarse gravel. See specification **Cr-Construction Road Stabilization**.

DUST CONTROL (Du)

SILT FENCE - TYPE A and B

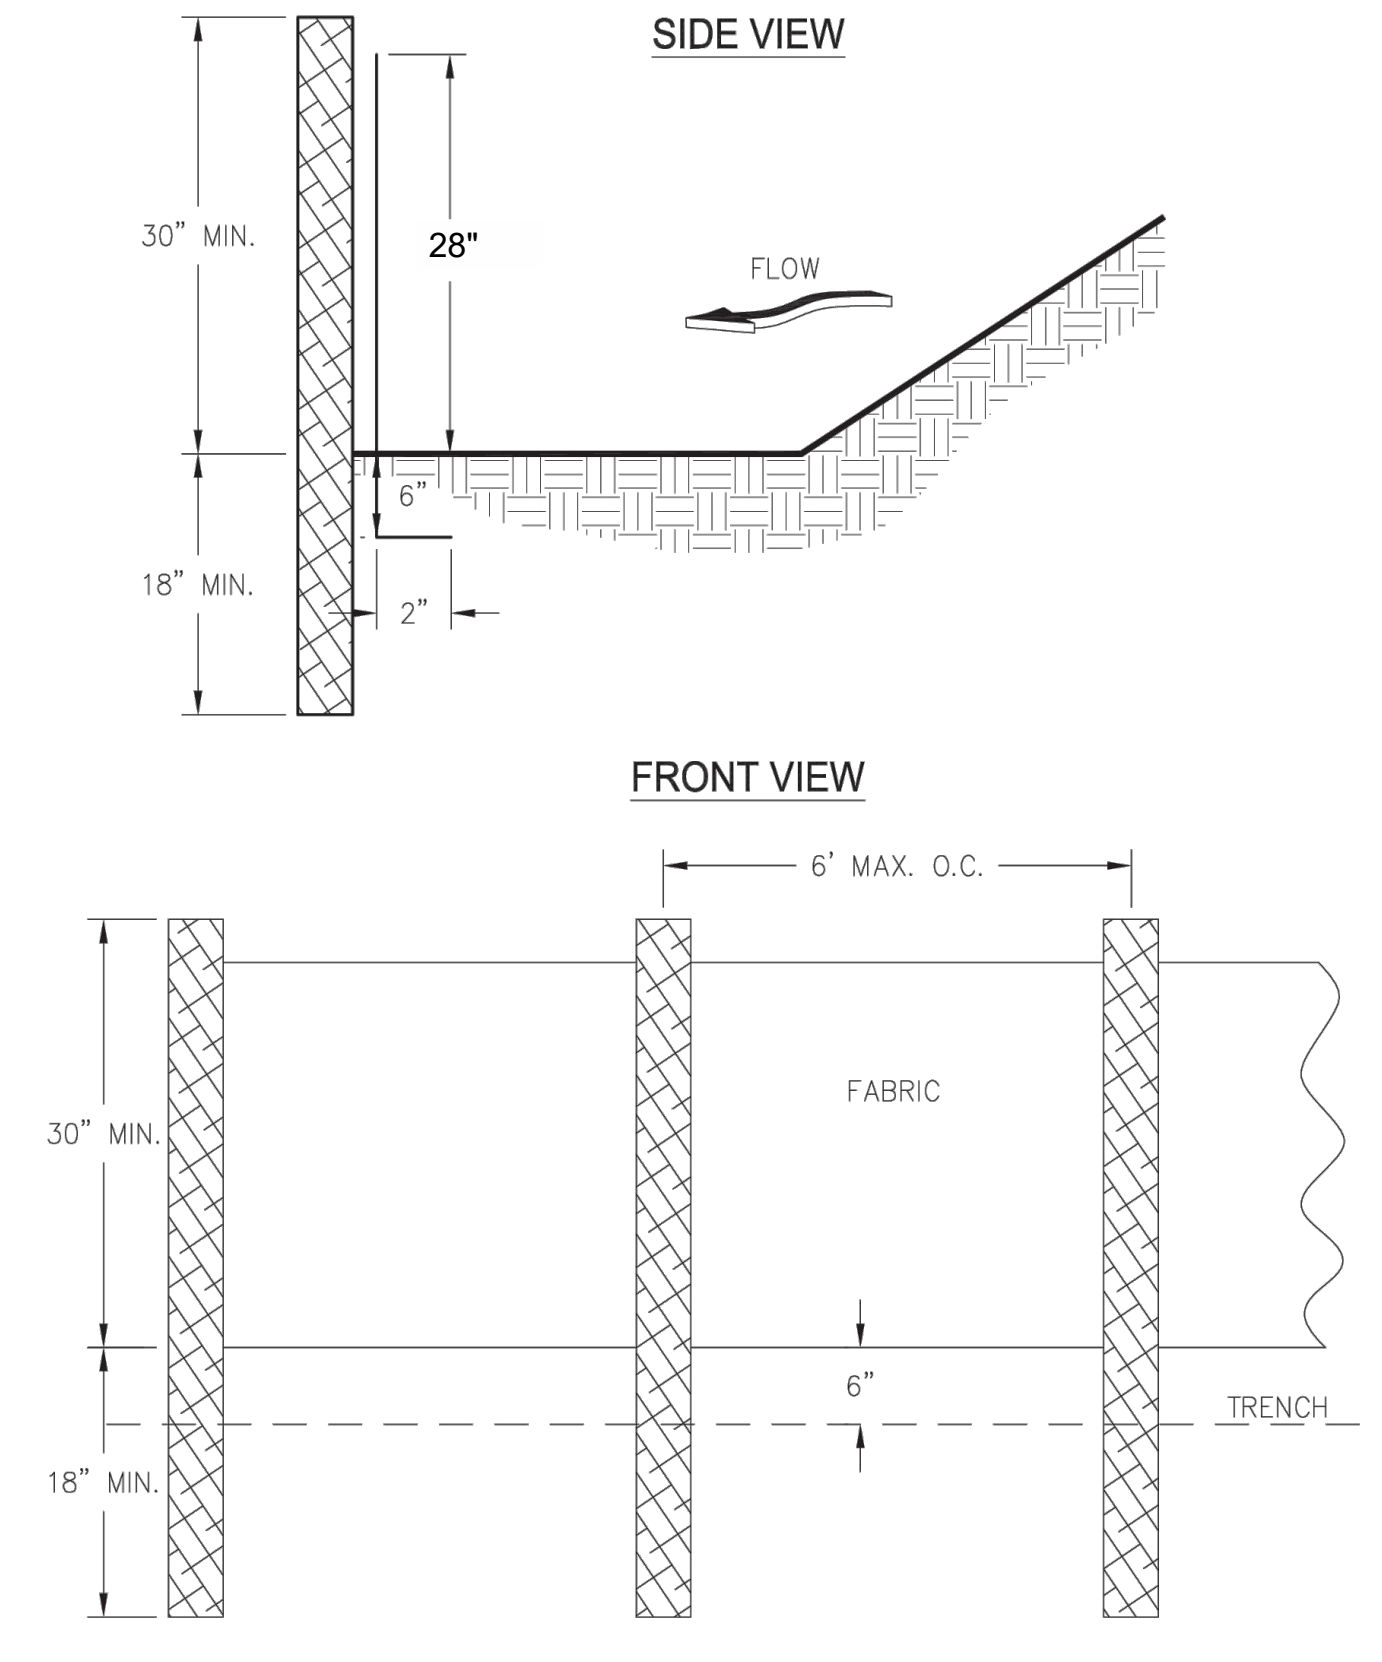

NOTES:
1. USE STEEL OR WOOD POSTS OR AS SPECIFIED BY THE EROSION, SEDIMENTATION, AND POLLUTION CONTROL PLAN.
2. HEIGHT (*) IS TO BE SHOWN ON THE EROSION, SEDIMENTATION, AND POLLUTION CONTROL PLAN.

Figure 6-27.1

GSWCC 2016 Edition 6-141

SILT FENCE (Sd1-NS)

12 13 14 CERTIFICATION STATEMENT (ENGINEER)

I CERTIFY THAT THE PERMITTEE'S EROSION, SEDIMENTATION AND POLLUTION CONTROL PLAN PROVIDES FOR AN APPROPRIATE AND COMPREHENSIVE SYSTEM OF BEST MANAGEMENT PRACTICES REQUIRED BY THE GEORGIA WATER QUALITY CONTROL ACT AND THE DOCUMENT "MANUAL FOR EROSION AND SEDIMENT CONTROL IN GEORGIA" PUBLISHED BY THE GEORGIA SOIL AND WATER CONSERVATION COMMISSION AS OF JANUARY 1 OF THE YEAR IN WHICH LAND-DISTURBING ACTIVITY WAS PERMITTED, PROVIDES FOR THE SAMPLING OF THE RECEIVING WATER(S) OR THE SAMPLING OF STORM WATER OUTFALLS AND THAT THE DESIGNED SYSTEM OF BEST MANAGEMENT PRACTICES AND SAMPLING METHODS IS EXPECTED TO MEET THE REQUIREMENTS CONTAINED IN THE GENERAL NPDES PERMIT NO. GAR 100001."

I CERTIFY UNDER PENALTY OF THE LAW THAT THIS PLAN WAS PREPARED AFTER A SITE VISIT TO THE LOCATIONS DESCRIBED HEREIN BY MYSELF OR MY AUTHORIZED AGENT, UNDER MY SUPERVISION."

UPON THE INSTALLATION OF THE PHASE 1 EROSION CONTROL MEASURES, I WILL VISIT THE SITE TO PERFORM THE INSPECTION CERTIFICATION WITHIN 7 DAYS, ONCE NOTIFIED BY THE CONTRACTOR AND CERTIFY THE INSTALLATION OF PHASE 1 BMPS.

GEORGIA LICENSED PROFESSIONAL (SIGN)	7/9/26 DATE	036681 GEORGIA PE#
TIMOTHY KYLE SHARPE GEORGIA LICENSED PROFESSIONAL (PRINT)		0000065749 GEORGIA EROSION CONTROL LEVEL 2 CERTIFICATION 3

2 GSWCC DESIGN PROFESSIONAL

GSWCC GEORGIA SOIL AND WATER CONSERVATION COMMISSION

TIMOTHY KYLE SHARPE

Level II Certified Design Professional

CERTIFICATION NUMBER 0000065749

ISSUED: 02.17.2024 EXPIRES: 02.17.2027

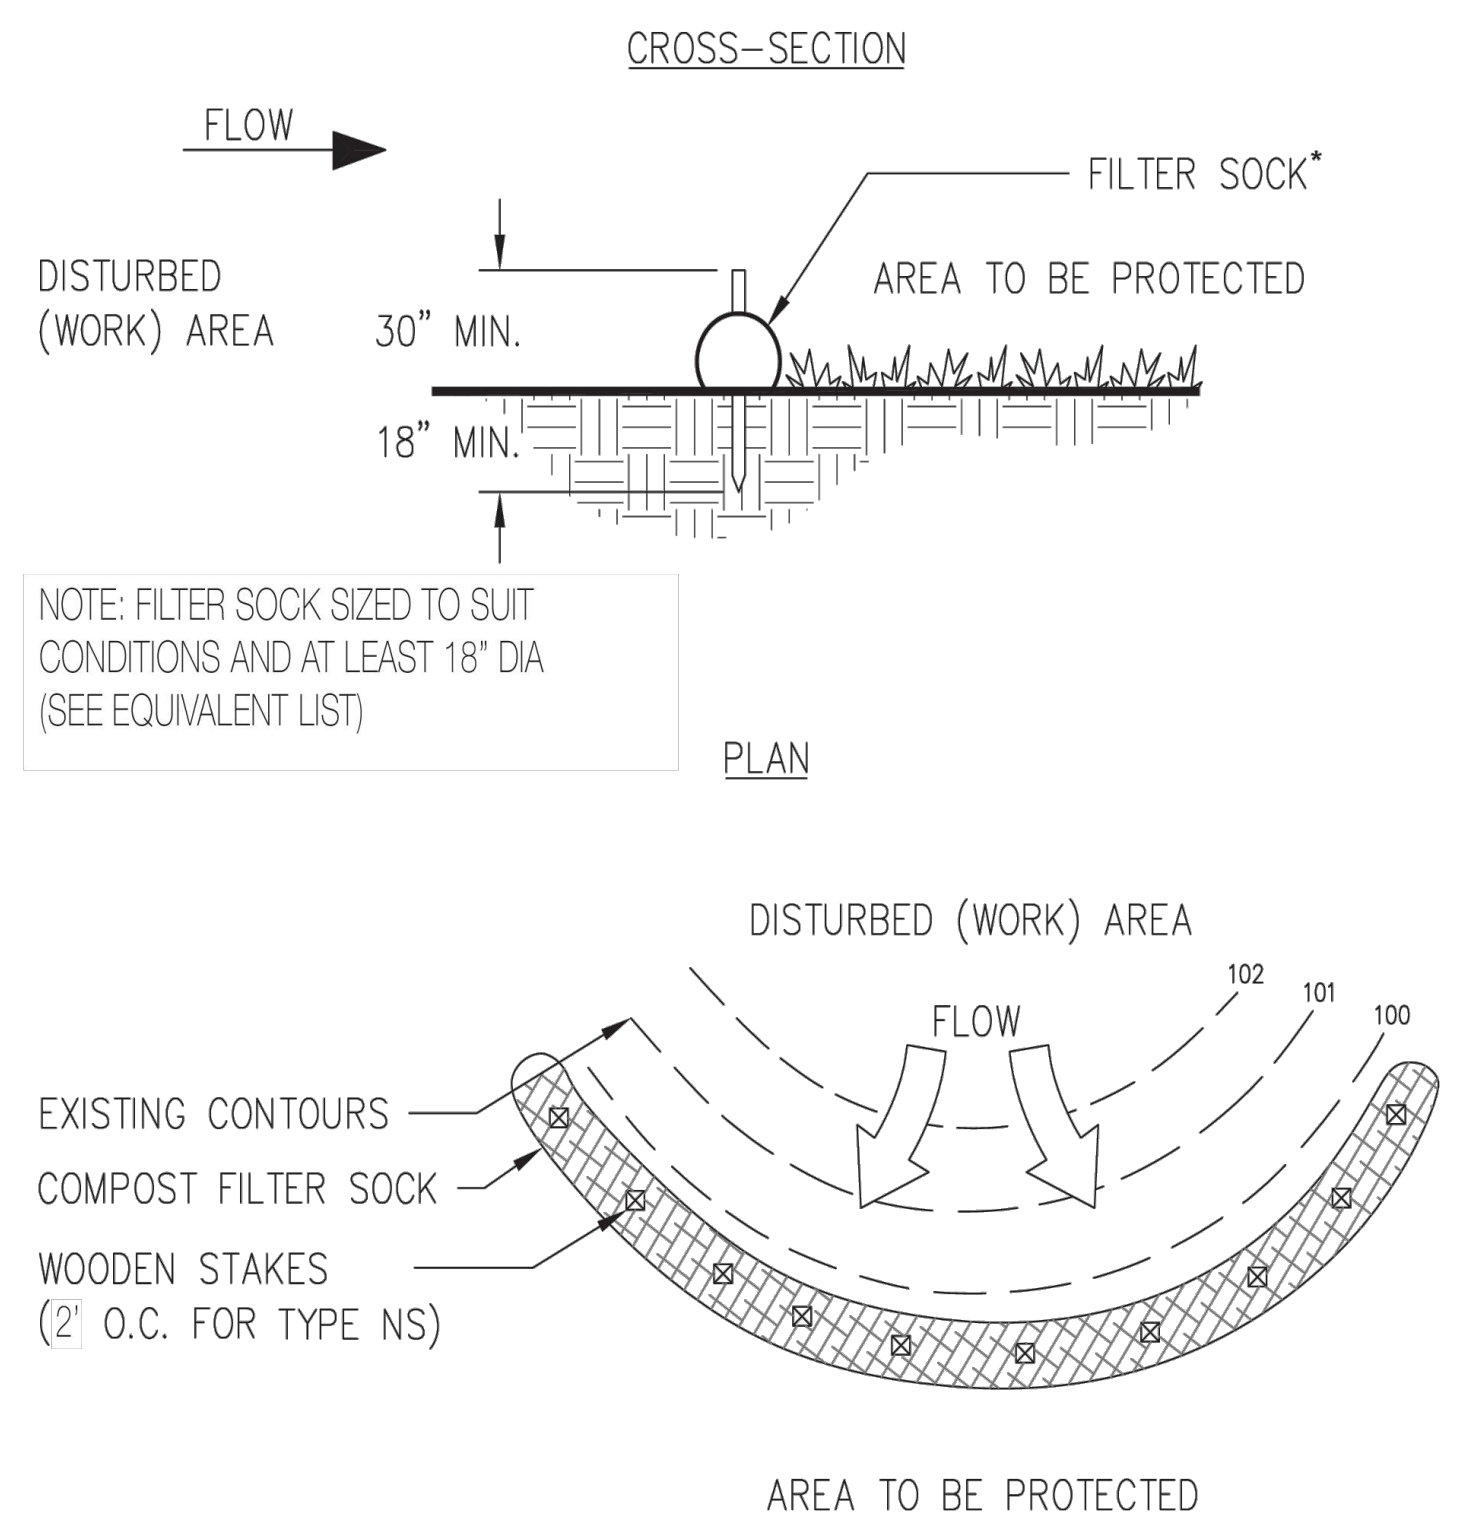

*HEIGHT IS TO BE SHOWN ON THE EROSION, SEDIMENTATION AND POLLUTION CONTROL PLAN

COMPOST FILTER SOCK (Sd1-NS)

Disturbed Area Stabilization (With Mulching Only)

Ds1

DEFINITION

Applying plant residues or other suitable materials, produced on the site if possible, to the soil surface.

PURPOSE

- To reduce runoff and erosion
- To conserve moisture
- To prevent surface compaction or crusting
- To control undesirable vegetation
- To modify soil temperature
- To increase biological activity in the soil

REQUIREMENT FOR REGULATORY COMPLIANCE

Mulch or temporary grassing shall be applied to all exposed areas within 14 days of disturbance. Mulch can be used as a singular erosion control device for up to six months, but it shall be applied at the appropriate depth, depending on the material used, anchored and have a continuous 90% cover or greater of the soil surface.

Maintenance shall be required to maintain appropriate depth and 90% cover. Temporary vegetation may be employed instead of mulch if the area will remain undisturbed for less than six months.

If any area will remain undisturbed for greater than six months, permanent vegetative techniques shall be employed. Refer to **Ds2 -Disturbed Area Stabilization (With Temporary Seeding), Ds3 - Disturbed Area Stabilization (With Permanent Seeding), and Ds4 - Disturbed Area Stabilization (With Sodding)**.

SPECIFICATIONS

Mulching Without Seeding

This standard applies to graded or cleared areas where seedings may not have a suitable growing season to produce an erosion retardant cover, but can be stabilized with a mulch cover.

Site Preparation

1. Grade to permit the use of equipment for applying and anchoring mulch.
2. Install needed erosion control measures as required such as dikes, diversions, berms, terraces and sediment barriers.
3. Loosen compact soil to a minimum depth of 3 inches.

Mulching Materials

Select one of the following materials and apply at the depth indicated:

1. Dry straw or hay shall be applied at a depth of 2 to 4 inches providing complete soil coverage. One advantage of this material is easy application.
2. Wood waste (chips, sawdust or bark) shall be applied at a depth of 2 to 3 inches. Organic material from the clearing stage of development should remain on site, be chipped, and applied as mulch. This method of mulching can greatly reduce erosion control costs.
3. Polyethylene film shall be secured over banks or stockpiled soil material for temporary protection. This material can be salvaged and re-used.

Applying Mulch

When mulch is used without seeding, mulch shall be applied to provide full coverage of the exposed area.

1. Dry straw or hay mulch and wood chips shall be applied uniformly by hand or by mechanical equipment.
2. If the area will eventually be covered with perennial vegetation, 20-30 pounds of nitrogen per acre in addition to the normal amount shall be applied to offset the uptake of nitrogen caused by the decomposition of the organic mulches.
3. Apply polyethylene film on exposed areas.

Anchoring Mulch

1. Straw or hay mulch can be pressed into the soil with a disk harrow with the disk set straight or with a special "packer disk." Disks may be smooth or serrated and should be 20 inches or more in diameter and 8 to 12 inches apart. The edges of the disk should be dull enough not to cut the mulch but to press it into the soil leaving much of it in an erect position. Straw or hay mulch shall be anchored immediately after application.

DISTURBED AREA STABILIZATION (Ds1)

RIPRAP OUTLET PROTECTION

PIPE OUTLET TO FLAT AREA -- NO WELL DEFINED CHANNEL

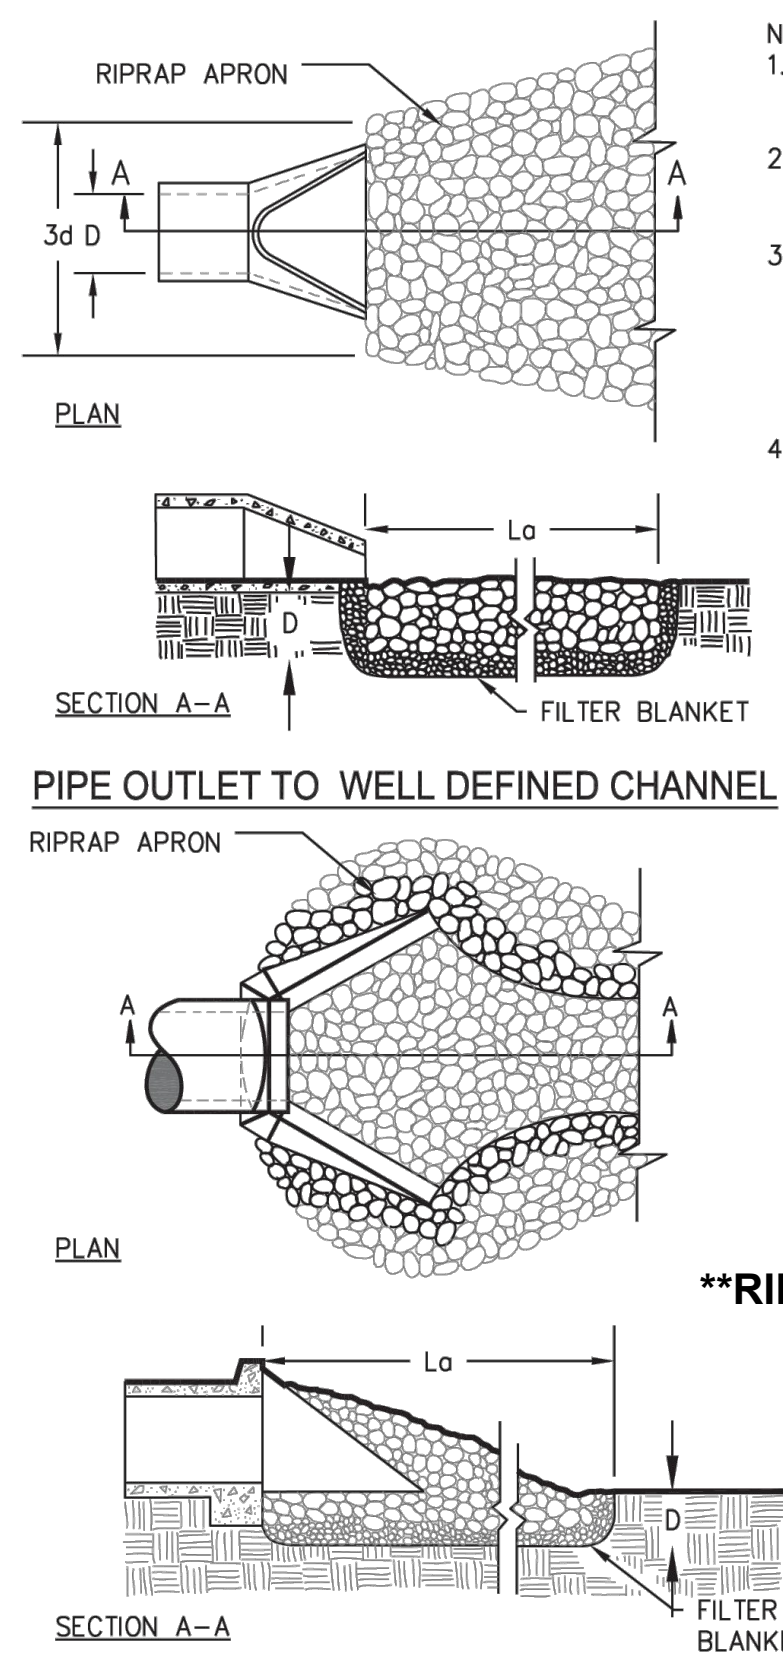

NOTES:
1. La IS THE LENGTH OF THE RIPRAP APRON.
2. D = 1.5 TIMES THE MAXIMUM STONE DIAMETER BUT NOT LESS THAN 6".
3. IN A WELL-DEFINED CHANNEL, EXTEND THE APRON UP THE CHANNEL BANKS TO AN ELEVATION OF 6" ABOVE THE MAXIMUM TAILWATER DEPTH OR TO THE TOP OF THE BANK (WHICHEVER IS LESS).
4. A FILTER BLANKET OR FILTER FABRIC SHOULD BE INSTALLED BETWEEN THE RIPRAP AND THE SOIL FOUNDATION.

St -1
Ø = 1.5'
Q = 8.0 cfs
v = 4.55 fps
W1 = 4.5'
L_a = 9.0'
W2 = 10.5'
d_{50} = 0.3'
d_{max} = 0.9'

BASED ON MIN TAILWATER CONDITION

*ALL SIZING IS BASED ON FULL PIPE/CHANNEL FLOW AND ALL HAVE MINIMUM TAILWATER CONDITION

Materials—Ensure that riprap consists of a well-graded mixture of stone. Larger stone should predominate, with sufficient smaller sizes to fill the voids between the stones. The diameter of the largest stone size should be no greater than 1.5 times the d_{50} size.

Thickness—Make the minimum thickness of riprap 1.5 times the maximum stone diameter.

Stone quality—Select stone for riprap from field stone or quarry stone. The stone should be hard, angular, and highly weather-resistant. The specific gravity of the individual stones should be at least 2.5.

Filter—Install a filter to prevent soil movement through the openings in the riprap. The filter should consist of a graded gravel layer or a synthetic filter cloth. Design filter blankets by the method described in Practice 6.15, *Riprap*.

****RIP RAP APRON TO BE PERMANENT**

Notes
1. L_a is the length of the riprap apron.
2. d = 1.5 times the maximum stone diameter but not less than 6″.
3. In a well-defined channel extend the apron up the channel banks to an elevation of 6″ above the maximum tailwater depth or to the top of the bank, whichever is less.
4. A filter blanket or filter fabric should be installed between the riprap and soil foundation.

Figure 6-34.3 - Riprap Outlet Protection (Modified From Va SWCC)

GSWCC 2016 Edition 6-212

OUTLET PROTECTION (St)

GEORGIA

UNIFORM CODING SYSTEM

FOR SOIL EROSION AND SEDIMENTATION CONTROL PRACTICES

GEORGIA SOIL AND WATER CONSERVATION COMMISSION

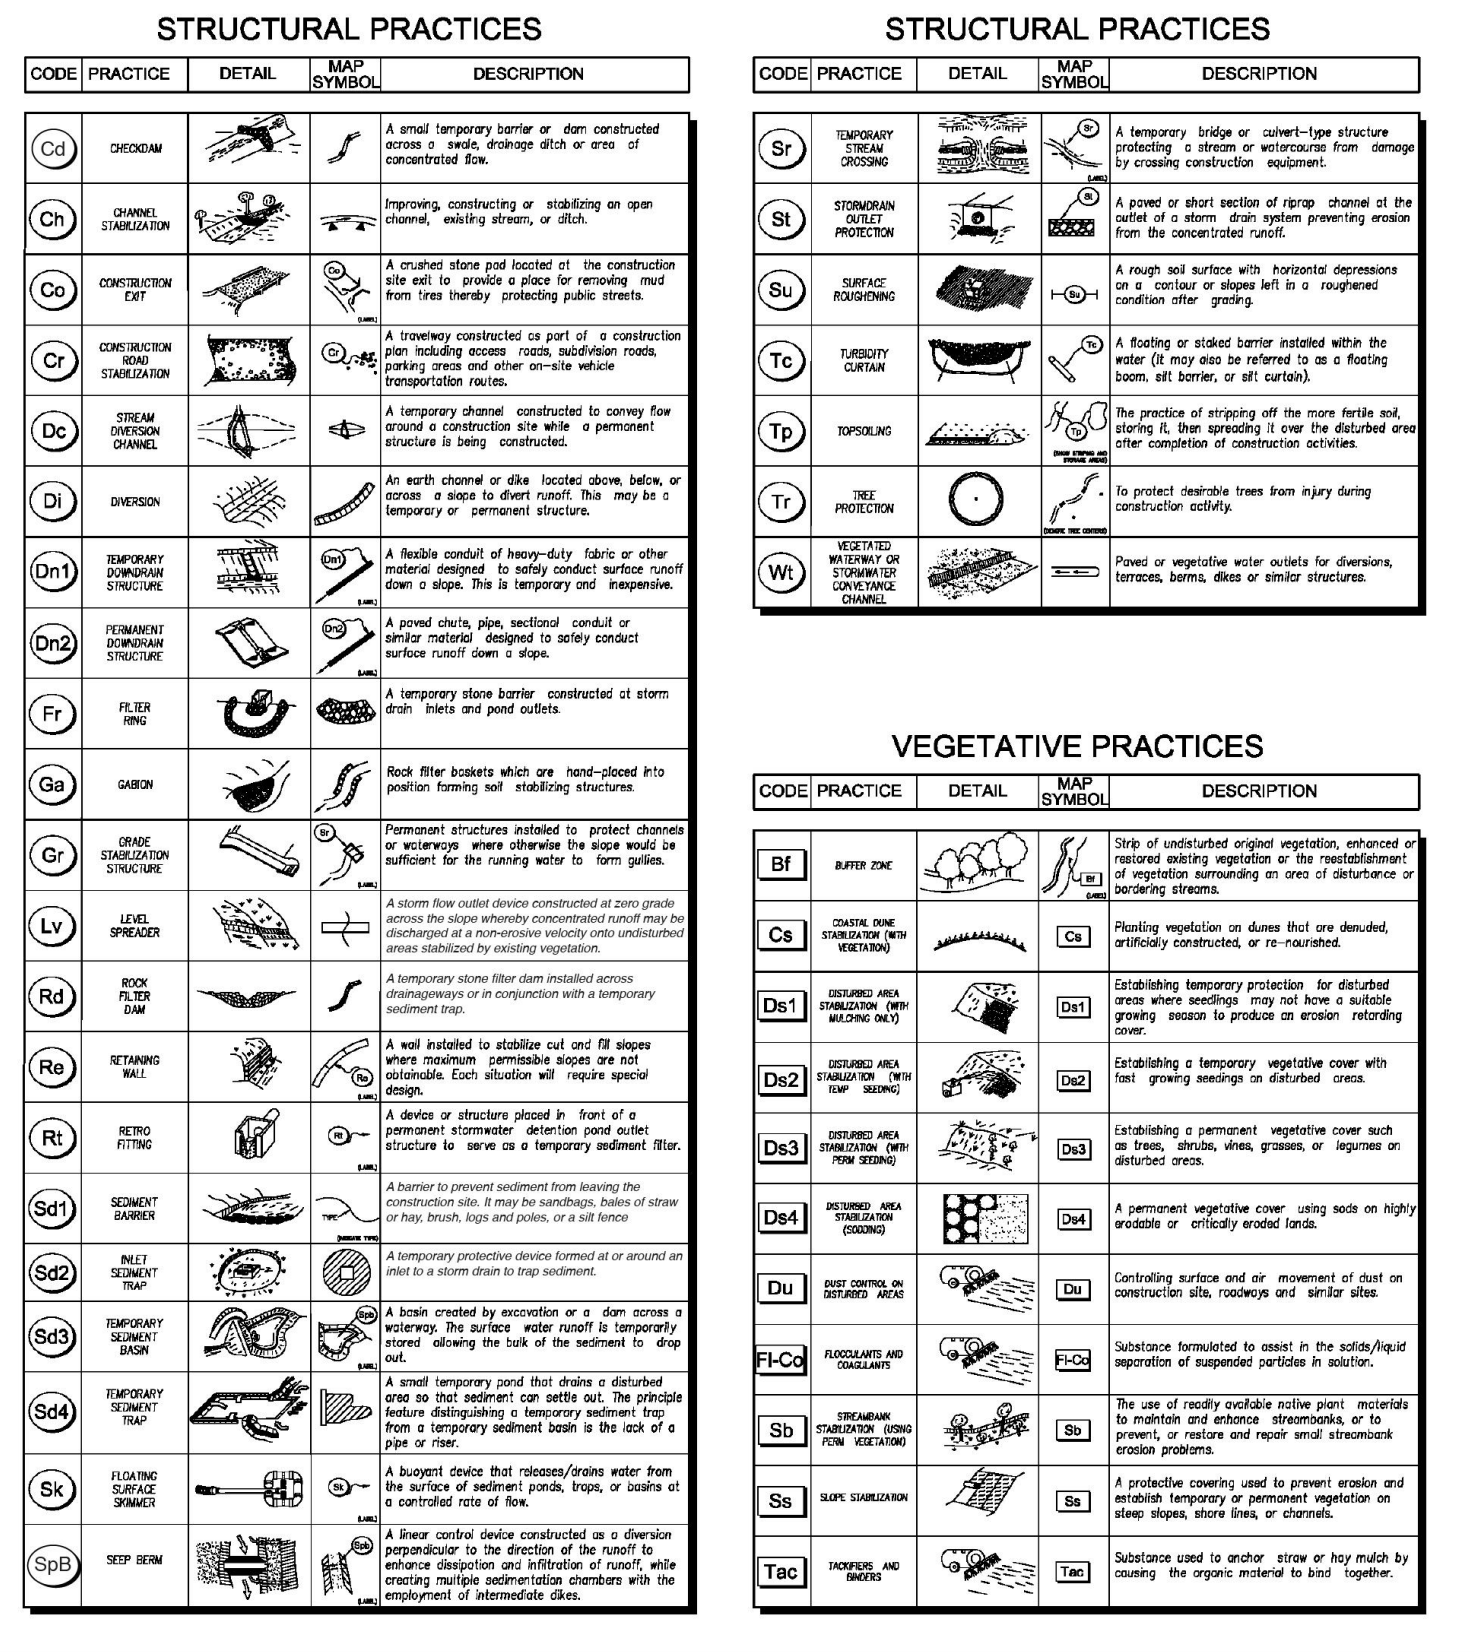
STRUCTURAL PRACTICES
STRUCTURAL PRACTICES
VEGETATIVE PRACTICES

GSWCC 2016 Edition 2-12

UNIFORM CODING SYSTEM

MULCHING

MULCH IS REQUIRED FOR ALL PERMANENT VEGETATION APPLICATIONS. MULCH APPLIED TO SEEDED AREAS SHALL ACHIEVE 75% TO 100% SOIL COVER. WHEN SELECTING A MULCH, DESIGN PROFESSIONALS SHOULD CONSIDER THE MULCH'S FUNCTIONAL LONGEVITY, VEGETATION ESTABLISHMENT ENHANCEMENT, AND EROSION CONTROL EFFECTIVENESS. SELECT THE MULCHING MATERIAL FROM THE FOLLOWING AND APPLY AS INDICATED:

DRY STRAW OR DRY HAY OF GOOD QUALITY AND FREE OF WEED SEEDS CAN BE USED. DRY STRAW SHALL BE APPLIED AT THE RATE OF 2 TONS PER ACRE. DRY HAY SHALL BE APPLIED AT A RATE OF 2 1/2 TONS PER ACRE.

1. WOOD CELLULOSE MULCH OR WOOD PULP FIBER SHALL BE USED WITH HYDRAULIC SEEDING. IT SHALL BE APPLIED AT THE RATE OF 500 POUNDS PER ACRE. DRY STRAW OR DRY HAY SHALL BE APPLIED (AT THE RATE INDICATED ABOVE) AFTER HYDRAULIC SEEDING.
2. ONE THOUSAND POUNDS OF WOOD CELLULOSE OR WOOD PULP FIBER, WHICH INCLUDES A TACKIFIER, SHALL BE USED WITH HYDRAULIC SEEDING ON SLOPES 3/4:1 OR STEEPER.
3. SERICEA LESPEDEZA HAY CONTAINING MATURE SEED SHALL BE APPLIED AT A RATE OF THREE TONS PER ACRE.
4. PINE STRAW OR PINE BARK SHALL BE APPLIED AT A THICKNESS OF 3 INCHES FOR BEDDING PURPOSES. OTHER SUITABLE MATERIALS IN SUFFICIENT QUANTITY MAY BE USED WHERE ORNAMENTALS OR OTHER GROUND COVERS ARE PLANTED. THIS IS NOT APPROPRIATE FOR SEEDED AREAS.
5. WHEN USING TEMPORARY EROSION CONTROL BLANKETS OR BLOCK SOD, MULCH IS NOT REQUIRED.
6. BITUMINOUS TREATED ROVING MAY BE APPLIED ON PLANTED AREAS, SLOPES, IN DITCHES OR DRY WATERWAYS TO PREVENT EROSION. BITUMINOUS TREATED ROVING SHALL BE APPLIED WITHIN 24 HOURS AFTER AN AREA HAS BEEN PLANTED. APPLICATION RATES AND MATERIALS MUST MEET GEORGIA DEPARTMENT OF TRANSPORTATION SPECIFICATIONS.

WOOD CELLULOSE AND WOOD PULP FIBERS SHALL NOT CONTAIN GERMINATION OR GROWTH INHIBITING FACTORS. THEY SHALL BE EVENLY DISPERSED WHEN AGITATED IN WATER. THE FIBERS SHALL CONTAIN A DYE TO ALLOW VISUAL METERING AND AID IN UNIFORM APPLICATION DURING SEEDING.

LIME & FERTILIZER RATES

NOTE: LIME & FERTILIZER RATES APPLY TO BOTH Ds2 & Ds3

AGRICULTURAL LIME IS REQUIRED AT THE RATE OF ONE TO TWO TONS PER ACRE UNLESS SOIL TESTS INDICATE OTHERWISE. GRADED AREAS REQUIRE LIME APPLICATION. IF LIME IS APPLIED WITHIN SIX MONTHS OF PLANTING PERMANENT PERENNIAL VEGETATION, ADDITIONAL LIME IS NOT REQUIRED. AGRICULTURAL LIME SHALL BE WITHIN THE SPECIFICATIONS OF THE GEORGIA DEPARTMENT OF AGRICULTURE.

LIME SPREAD BY CONVENTIONAL EQUIPMENT SHALL BE "GROUND LIMESTONE." GROUND LIMESTONE IS CALCITIC OR DOLOMITIC LIMESTONE GROUND SO THAT 90 PERCENT OF THE MATERIAL WILL PASS THROUGH A 10-MESH SIEVE, NOT LESS THAN 50 PERCENT WILL PASS THROUGH A 50-MESH SIEVE AND NOT LESS THAN 25 PERCENT WILL PASS THROUGH A 100-MESH SIEVE.

FAST-ACTING LIME SPREAD BY HYDRAULIC SEEDING EQUIPMENT SHOULD BE "FINELY GROUND LIMESTONE" SPANNING FROM THE 180 MICRON SIZE TO THE 5 MICRON SIZE. FINELY GROUND LIMESTONE IS CALCITIC OR DOLOMITIC LIMESTONE GROUND SO THAT 95 PERCENT OF THE MATERIAL WILL PASS THROUGH A 100-MESH SIEVE.

IT IS DESIRABLE TO USE DOLOMITIC LIMESTONE IN THE SAND HILLS, SOUTHERN COASTAL PLAIN AND ATLANTIC COAST FLATWOODS MLRAS. (SEE FIGURE 6-4.1)

AGRICULTURAL LIME IS GENERALLY NOT REQUIRED WHERE ONLY TREES ARE PLANTED.

INITIAL FERTILIZATION, NITROGEN, TOPDRESSING, AND MAINTENANCE FERTILIZER REQUIREMENTS FOR EACH SPECIES OR COMBINATION OF SPECIES ARE LISTED IN TABLE 6-5.1.

MULCHING / FERTILIZER RATES

TYPICAL INSTALLATION GUIDELINES FOR ROLLED EROSION CONTROL PRODUCTS (RECP)

BLANKET AND MATTING CROSS-SECTIONS

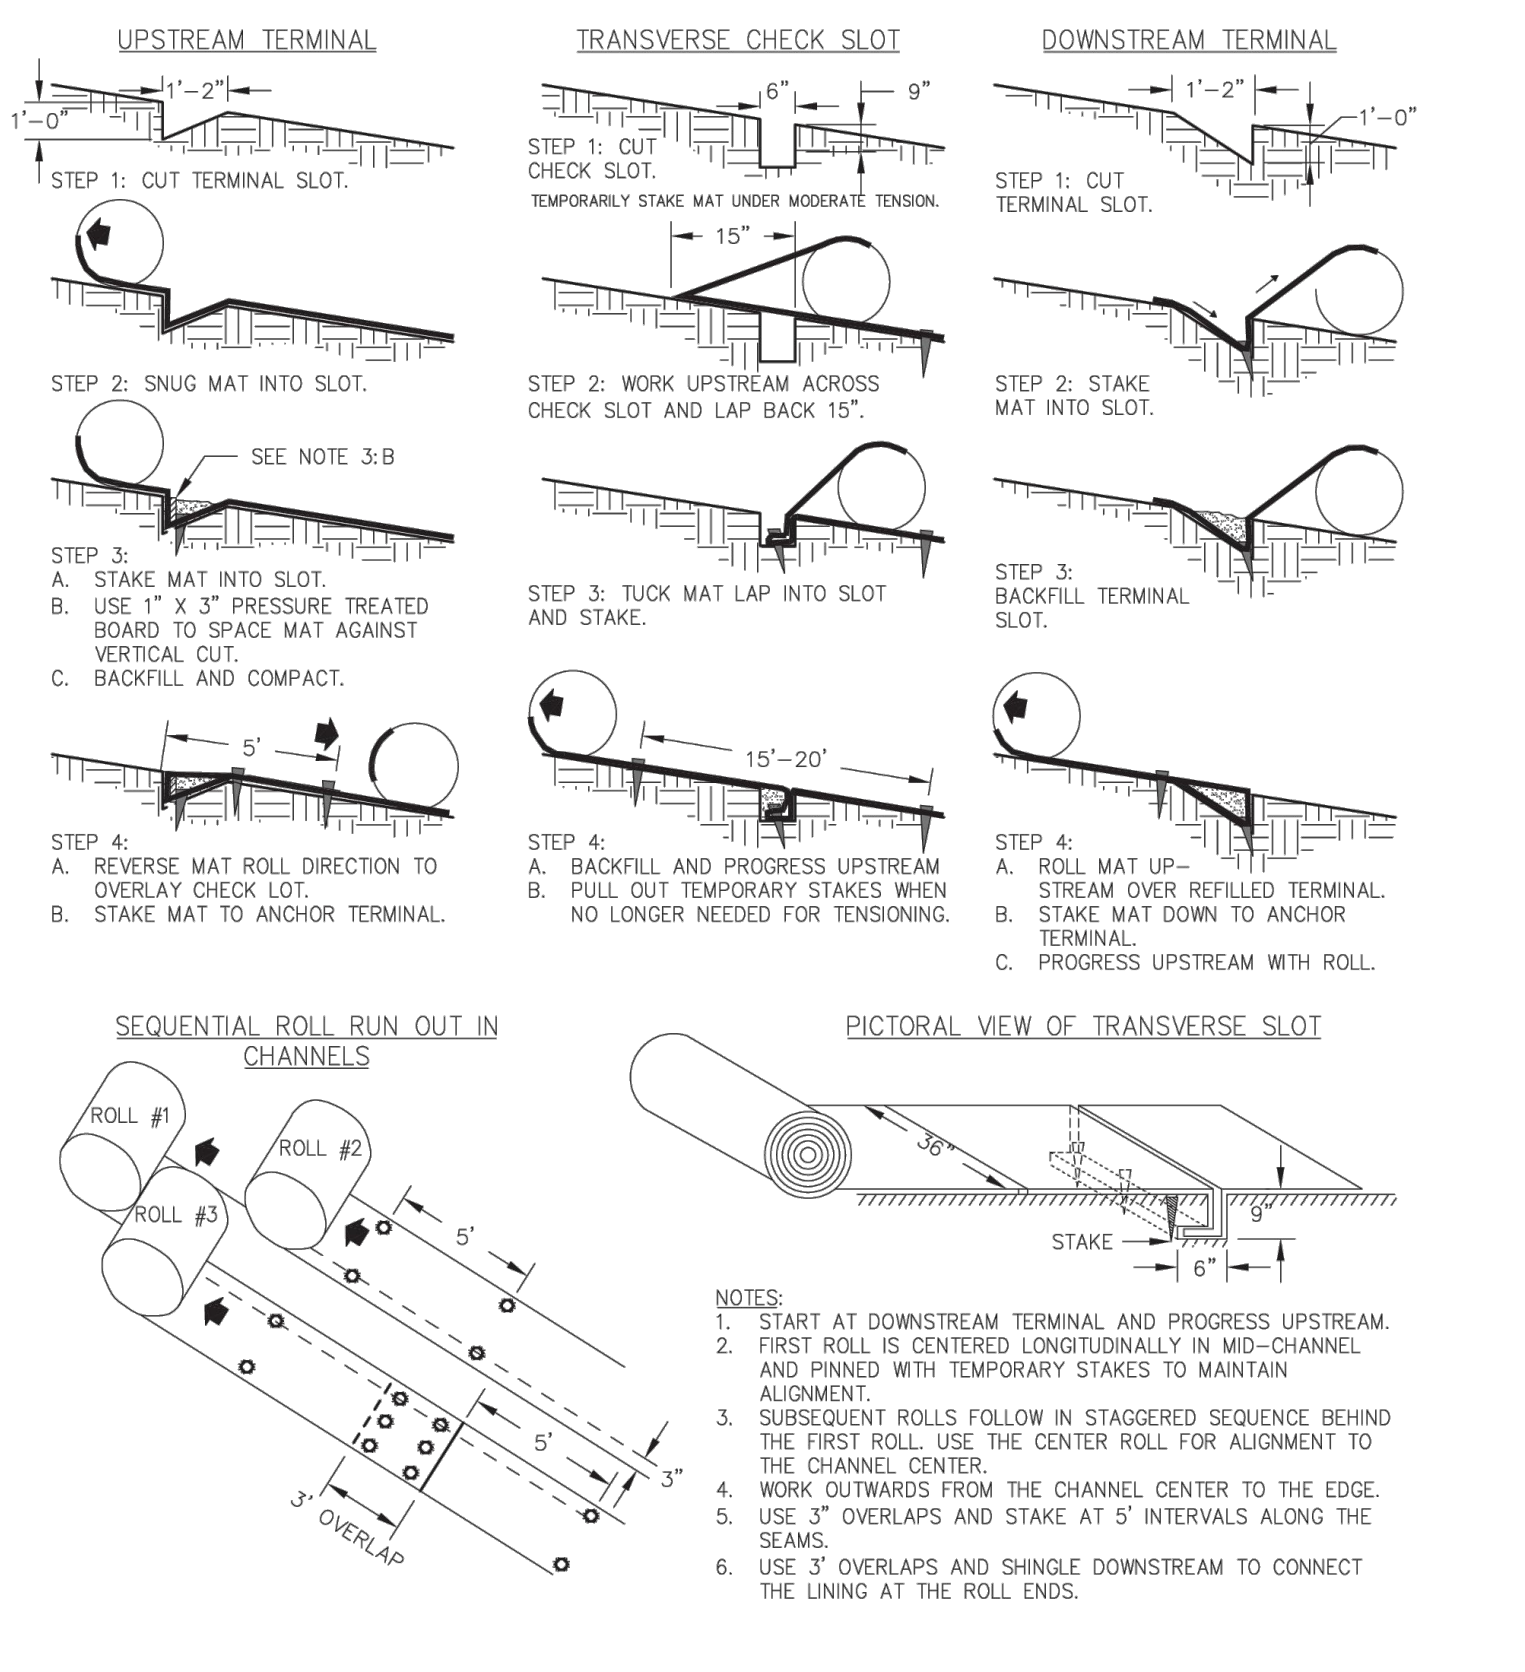
UPSTREAM TERMINAL
1'-2"
1'-0"
STEP 1: CUT TERMINAL SLOT.
STEP 2: SNUG MAT INTO SLOT.
SEE NOTE 3:B
STEP 3:
A. STAKE MAT INTO SLOT.
B. USE 1" X 3" PRESSURE TREATED BOARD TO SPACE MAT AGAINST VERTICAL CUT.
C. BACKFILL AND COMPACT.
5'
STEP 4:
A. REVERSE MAT ROLL DIRECTION TO OVERLAY CHECK LOT.
B. STAKE MAT TO ANCHOR TERMINAL.
TRANSVERSE CHECK SLOT
6"
9"
STEP 1: CUT CHECK SLOT.
TEMPORARILY STAKE MAT UNDER MODERATE TENSION.
15"
STEP 2: WORK UPSTREAM ACROSS CHECK SLOT AND LAP BACK 15".
STEP 3: TUCK MAT LAP INTO SLOT AND STAKE.
15'-20'
STEP 4:
A. BACKFILL AND PROGRESS UPSTREAM
B. PULL OUT TEMPORARY STAKES WHEN NO LONGER NEEDED FOR TENSIONING.
DOWNSTREAM TERMINAL
1'-2"
1'-0"
STEP 1: CUT TERMINAL SLOT.
STEP 2: STAKE MAT INTO SLOT.
STEP 3: BACKFILL TERMINAL SLOT.
STEP 4:
A. ROLL MAT UPSTREAM OVER REFILLED TERMINAL.
B. STAKE MAT DOWN TO ANCHOR TERMINAL.
C. PROGRESS UPSTREAM WITH ROLL.
SEQUENTIAL ROLL RUN OUT IN CHANNELS
ROLL #1
ROLL #2
ROLL #3
5'
5'
3"
3' OVERLAP
PICTORAL VIEW OF TRANSVERSE SLOT
36"
STAKE
9"
6"

NOTES:
1. START AT DOWNSTREAM TERMINAL AND PROGRESS UPSTREAM.
2. FIRST ROLL IS CENTERED LONGITUDINALLY IN MID-CHANNEL AND PINNED WITH TEMPORARY STAKES TO MAINTAIN ALIGNMENT.
3. SUBSEQUENT ROLLS FOLLOW IN STAGGERED SEQUENCE BEHIND THE FIRST ROLL. USE THE CENTER ROLL FOR ALIGNMENT TO THE CHANNEL CENTER.
4. WORK OUTWARDS FROM THE CHANNEL CENTER TO THE EDGE.
5. USE 3" OVERLAPS AND STAKE AT 5' INTERVALS ALONG THE SEAMS.
6. USE 3' OVERLAPS AND SHINGLE DOWNSTREAM TO CONNECT THE LINING AT THE ROLL ENDS.

Figure 6-10.1 - Typical Installation Guidelines for Matting and Blankets

6-71 GSWCC 2016 Edition

SLOPE STABILIZATION (Ss)

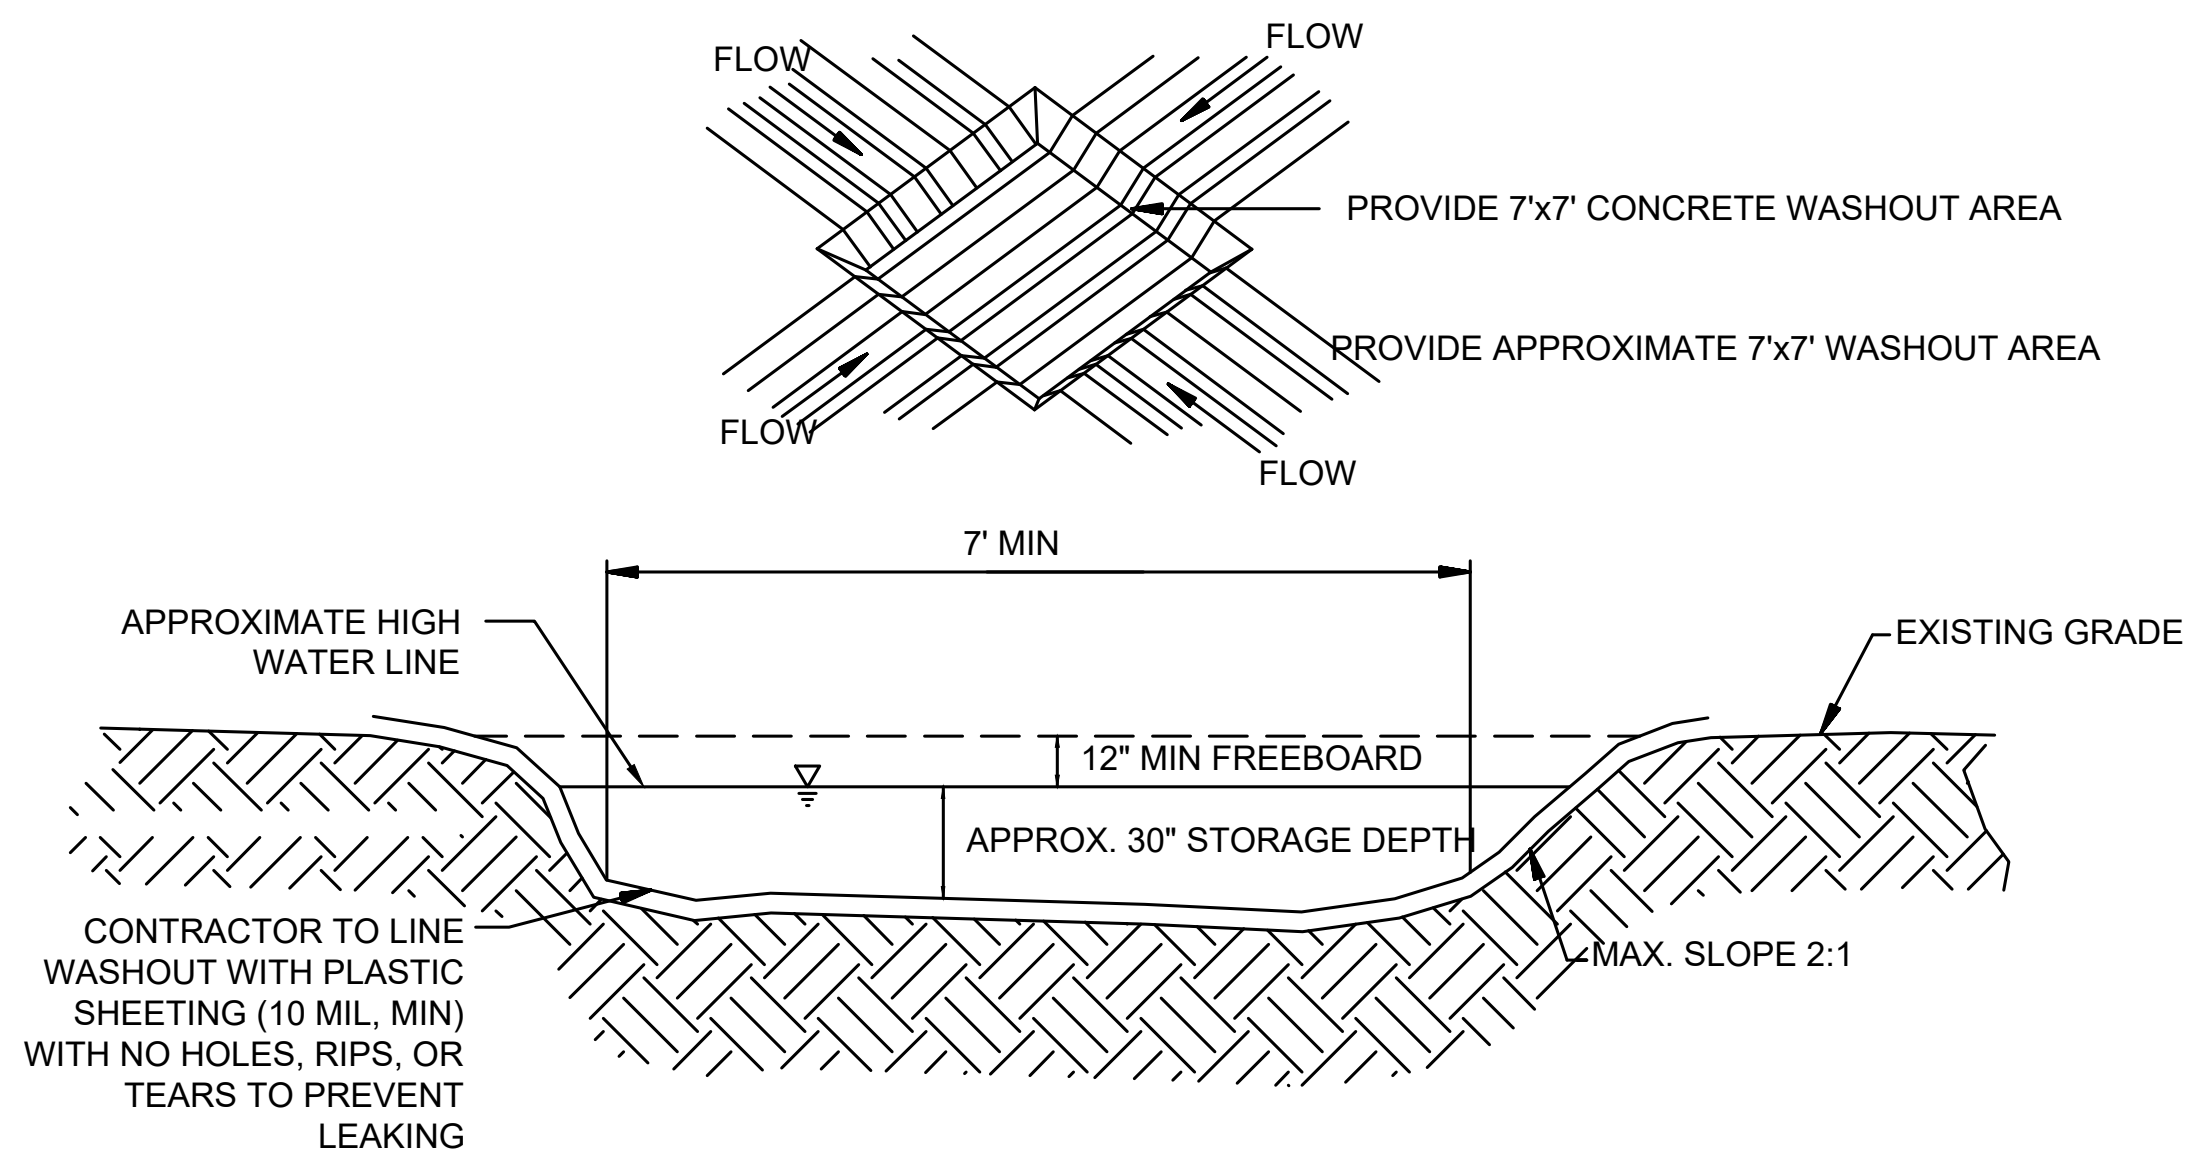
FLOW
FLOW
PROVIDE 7'x7' CONCRETE WASHOUT AREA
PROVIDE APPROXIMATE 7'x7' WASHOUT AREA
FLOW
FLOW
7' MIN
APPROXIMATE HIGH WATER LINE
EXISTING GRADE
12" MIN FREEBOARD
APPROX. 30" STORAGE DEPTH
CONTRACTOR TO LINE WASHOUT WITH PLASTIC SHEETING (10 MIL, MIN) WITH NO HOLES, RIPS, OR TEARS TO PREVENT LEAKING
MAX. SLOPE 2:1

NOTES:

1.) CONCRETE WASHOUT FACILITIES TO BE CHECKED DAILY TO DETERMINE IF THEY HAVE BEEN FILLED TO 75 PERCENT CAPACITY, WHICH IS WHEN MATERIALS NEED TO BE REMOVED.
2.) SELF-INSTALLED WASHOUTS SHOULD BE INSPECTED DAILY TO ENSURE THAT PLASTIC LININGS ARE INTACT AND SIDEWALLS HAVE NOT BEEN DAMAGED BY CONSTRUCTION ACTIVITIES.
3.) IF STORED LIQUIDS HAVE NOT EVAPORATED AND THE WASHOUT IS NEARING CAPACITY, VACUUM OR PUMP AND DISPOSE OF THEM IN AN LOCAL, STATE AND FEDERALLY LEGAL MANNER
4.) REMOVE LIQUIDS OR COVER THE WASHOUT AREA BEFORE PREDICTED RAINSTORMS TO PREVENT OVERFLOWS.
5.) HARDENED SOLIDS CAN BE REMOVED WHOLE OR BE BROKEN FIRST. CONTRACTOR TO REUSE THE SOLIDS ONSITE OR HAUL THEM AWAY FOR RECYCLING/DISPOSAL IN A LEGAL MANNER.
*CONTRACTOR MAY SUBSTITUTE AN APPROVED PREFABRICATED CONTAINER

CONCRETE WASHDOWN

MAINTENANCE

The exit shall be maintained in a condition that will prevent tracking or flow of mud onto public rights-of-way. This may require periodic top dressing with 1.5-3.5 inch stone, as conditions demand, and repair and/or cleanout of any structures to trap sediment. All materials spilled, dropped, washed, or tracked from vehicles or site onto roadways or into storm drains must be removed immediately.

CRUSHED STONE CONSTRUCTION EXIT

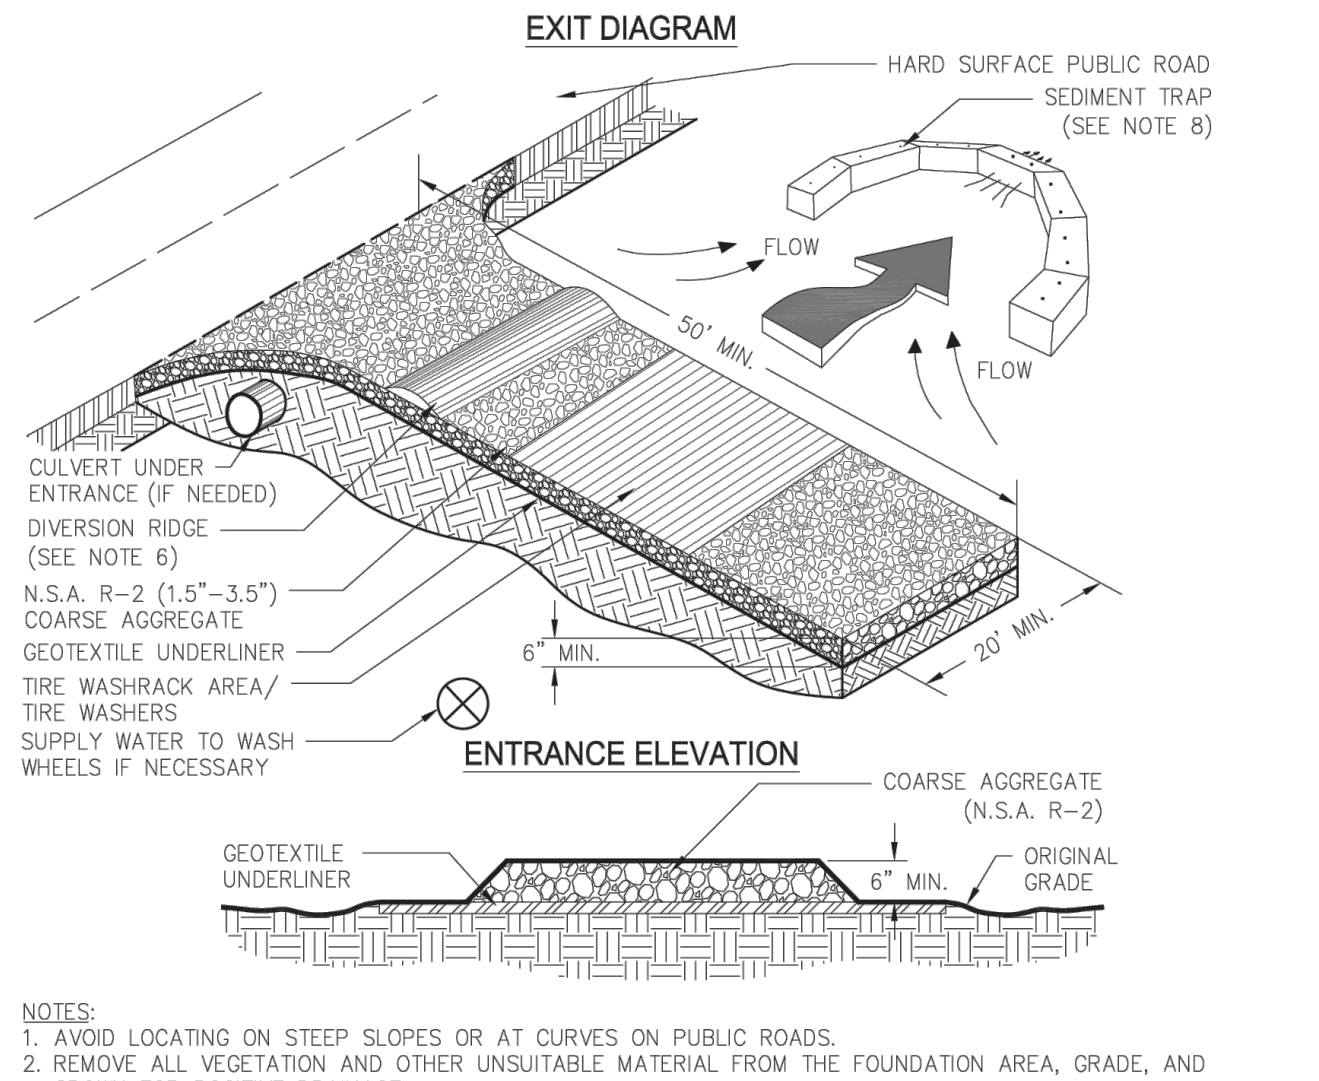
EXIT DIAGRAM
HARD SURFACE PUBLIC ROAD
SEDIMENT TRAP (SEE NOTE 8)
FLOW
FLOW
50' MIN.
CULVERT UNDER ENTRANCE (IF NEEDED)
DIVERSION RIDGE (SEE NOTE 6)
N.S.A. R-2 (1.5"-3.5") COARSE AGGREGATE
GEOTEXTILE UNDERLINER
TIRE WASHRACK AREA/ TIRE WASHERS
SUPPLY WATER TO WASH WHEELS IF NECESSARY
6" MIN.
20' MIN.
ENTRANCE ELEVATION
COARSE AGGREGATE (N.S.A. R-2)
GEOTEXTILE UNDERLINER
6" MIN.
ORIGINAL GRADE

NOTES:
1. AVOID LOCATING ON STEEP SLOPES OR AT CURVES ON PUBLIC ROADS.
2. REMOVE ALL VEGETATION AND OTHER UNSUITABLE MATERIAL FROM THE FOUNDATION AREA, GRADE, AND CROWN FOR POSITIVE DRAINAGE.
3. AGGREGATE SIZE SHALL BE IN ACCORDANCE WITH NATIONAL STONE ASSOCIATION R-2 (1.5"-3.5" STONE).
4. GRAVEL PAD SHALL HAVE A MINIMUM THICKNESS OF 6".
5. PAD WIDTH SHALL BE EQUAL FULL WIDTH AT ALL POINTS OF VEHICULAR EGRESS, BUT NO LESS THAN 20'.
6. A DIVERSION RIDGE SHOULD BE CONSTRUCTED WHEN GRADE TOWARD PAVED AREA IS GREATER THAN 2%..
7. INSTALL PIPE UNDER THE ENTRANCE IF NEEDED TO MAINTAIN DRAINAGE DITCHES.
8. WHEN WASHING IS REQUIRED, IT SHOULD BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASIN (DIVERT ALL SURFACE RUNOFF AND DRAINAGE FROM THE ENTRANCE TO A SEDIMENT CONTROL DEVICE).
9. WASHRACKS AND/OR TIRE WASHERS MAY BE REQUIRED DEPENDING ON SCALE AND CIRCUMSTANCE. IF NECESSARY, WASHRACK DESIGN MAY CONSIST OF ANY MATERIAL SUITABLE FOR TRUCK TRAFFIC THAT REMOVE MUD AND DIRT.
10. MAINTAIN AREA IN A WAY THAT PREVENTS TRACKING AND/OR FLOW OF MUD ONTO PUBLIC RIGHTS-OF-WAYS. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEANOUT OF ANY MEASURES USED TO TRAP SEDIMENT.

Figure 6-14.1

GSWCC 2016 Edition 6-90

CONSTRUCTION EXIT (Co)

PREPARED IN THE OFFICE OF:

GASKINS +LECRAW
a PAPE-DAWSON company
© 2026 GASKINS + LECRAW
3475 CORPORATE WAY
SUITE A
DULUTH, GA 30096
PHONE - 678.546.8100
www.gaskinslecraw.com
PEF008127

REVISIONS:

REV. #	DATE	DRAWN BY:	CHECKED BY:
--	--	--	--

CLIENT
PRAXIS3
100 PEACHTREE STREET NW, SUITE 1450, ATLANTA, GEORGIA 30303

PROJECT
FIFTH THIRD BANK - WARNER ROBINS, GA
2711 WATSON BLVD
PARCEL ID: 0W0780-005000
WARNER ROBINS, HOUSTON COUNTY, GEORGIA

SEAL:

TIMOTHY KYLE SHARPE
No. PE036681
7/9/2026

CALL BEFORE YOU DIG

811 Know what's below. Call before you dig.

SCALE & NORTH ARROW:

DETAILS ARE
NOT
DRAWN TO SCALE

DESIGN INFO:

DRAWN BY:	JOA
DESIGNED BY:	MAT
REVIEWED BY:	TKS
JOB #:	75670007
DATE:	JULY 9, 2026

ESPC DETAILS - 1

C-2.5

Drawing name: C:\Users\cklentz\Gaskins+LeCraw Dropbox\Shared Folders\Engineering\75670007 - Praxis3 - Fifth Third - Warner Robins_GA\CADD\CONSTR\75670007 - 05 - ESPC DETAILS.dwg EROSION CONTROL DETAILS - 1 Jul 09, 2026 10:50am by: cklentz

This document, together with the concepts and designs presented herein, as an instrument of service, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Gaskins + LeCraw, a Pape-Dawson Company shall be without liability to Gaskins + LeCraw, a Pape-Dawson Company, Copyright Gaskins + LeCraw, a Pape-Dawson Company, 2026