FIFTH THIRD


WATSON, GA

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093
KAHUA PROJECT #: K1130695
PROJECT #: 26032

FLORIDA PRODUCT APPROVAL

PRODUCT TYPE	MANUFACTURER	MODEL # / SERIES	FL PRODUCT APPR. NO.	MIAMI DADE N.O.A.
EXTERIOR PANELS				
SWINGING-CURTAINWALL	KAWNEER	350T INSULPOUR IMPACT RESISTANT. 10" BOTTOM STILE	FL 28914.1-R5	N/A
SWINGING - STOREFRONT	KAWNEER	350T INSULPOUR IMPACT RESISTANT. 10" BOTTOM STILE	FL 28914.1-R5	N/A
SWINGING - EXT. DOOR ASSEMBLY	CECO DOOR PRODUCT	OUTSWINGING COMMERCIAL DOOR	FL 16355.2 - R4	N/A
WALL PANELS				
IMPACT RESISTANT CURTAIN WALL	KAWNEER	1600 WALL SYSTEM 1	FL 5388.2 - R12	N/A
IMPACT RESISTANT STOREFRONT	KAWNEER	TRIFAB VERSAGLAZE 451T, 1" INSULATED CENTER SET GLASS	FL 14287.1 - R10	N/A
ALUMINUM COMPOSITE METAL PANEL	ALCOA ARCHITECTURAL REYNOBOND	REYNOBOND COMPOSITE PANELS	FL 11794 - R3	N/A
EIFS	DRYVIT	DRYVIT OUTSULATION PLUS MD	FL 3423.3 - R12	N/A
ROOFING PRODUCTS				
TPO ROOFING SYSTEM	FIRESTONE	ULTRA PLY TPO SINGLE PLY ROOFING SYSTEM - STEEL DECKS	FL 10264 - R19	N/A
ROOF HATCH	BILCO	S-50	FL 15110.1 - R6	N/A
ROOFING BOARD	USG	SECUROCK GYPSUM FIBER ROOF BOARD	FL 4264.1 - R9	N/A
ROOFING FASTENERS	METAL ERA	METAL ERA ROOF EDGE TERMINATION SYSTEM	FL 29463.1 - R2	N/A
OTHER PRODUCTS				
CONCRETE LINTELS	CAST-CRETE USA	HIGH STRENGTH PRECAST AND PRESTRESS CONCRETE LINTEL	FL 158.1 - R17	N/A
INTERIOR STOREFRONT DOOR	KAWNEER	350 STANDARD ENTRANCE. 10" BOTTOM RAIL	FL 10388.1 - R6	N/A

SYMBOLS

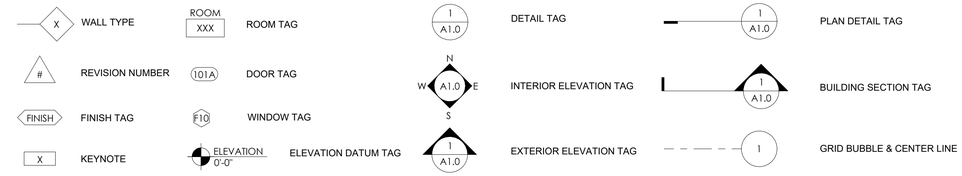

OWNER & CONSULTANTS

OWNER
FIFTH THIRD BANK
TAMMALA BROOKS
VICE PRESIDENT
DIRECTOR - PROJECT GROUP
FIFTH THIRD BANK RETAIL
38 FOUNTAIN SQUARE PLAZA
MD 10903K
CINCINNATI, OH 45202
TAMMALA.BROOKS@53.COM

CIVIL / LANDSCAPE / MEP
GASKINS + LECRAW
1266 POWDER SPRINGS RD SW
MARIETTA, GA 30064
CONTACT: MICHELLE MACAULEY
678.257.1914

ARCHITECT
PRAXIS3, LLC
100 PEACHTREE ST NW,
SUITE: 1450
ATLANTA, GA 30303
CONTACT: STUART ROMM
678.904.7422

STRUCTURAL
MARK NANNIS STRUCTURAL
ENGINEERS, INC.
2060 BUFORD HIGHWAY SUITE 106
BUFORD, GA 30518
CONTACT: MARK NANNIS
770.310.8472

OWNER AGENT
CBRE GLOBAL
DARLECIA RHONE
PROJECT MANAGER
CBRE GLOBAL WORKPLACE
T: 1.678.216.8407
E: DARLECIA.RHONE@CBRE.COM

MECHANICAL/PLUMBING
BARRETT, WOODYARD & ASSOCIATES
310 TECHNOLOGY SUITE 200
PEACHTREE CORNERS, GA 30092
CONTACT: GARRY JENKINS
678.654.6707


ELECTRICAL
BARRETT, WOODYARD & ASSOCIATES
310 TECHNOLOGY SUITE 200
PEACHTREE CORNERS, GA 30092
CONTACT: RAHN WILLIAMS
678.301.2227

UTILITIES


SANITARY SEWER AND WATER
WARNER ROBINS UTILITIES
MAINTENANCE DEPARTMENT
95 GLENN DRIVE
WARNER ROBINS, GA 31088
WILLIAM ABARCA
WABARCA@WRGA.GOV
478.302.5438

ELECTRIC & TELEPHONE
FINT ENERGIES
98 CARL VINSON PARKWAY
WARNER ROBINS, GA 31088
LEE MARSH
LMARSH@FLINTEMC.COM
478.988.3950

VICINITY MAP

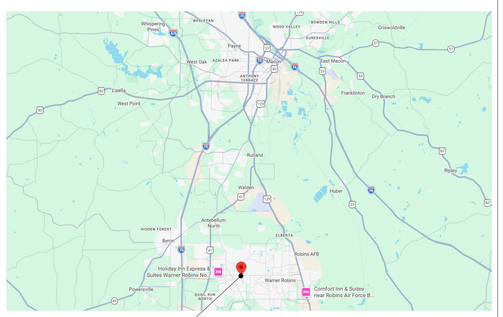

LOCATION MAP

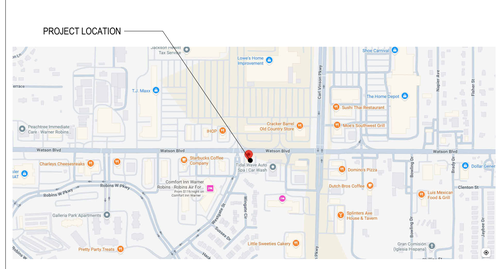

GENERAL NOTES

1. THE CONSTRUCTION NOTES AND DRAWINGS ARE SUPPLIED TO ILLUSTRATE THE DESIGN AND GENERAL TYPE OF CONSTRUCTION DESIRED AND ARE INTENDED TO IMPLY THE FINEST QUALITY OF CONSTRUCTION, MATERIAL AND WORKMANSHIP THROUGHOUT.
2. ALL WORK SHALL BE IN COMPLIANCE WITH APPLICABLE FEDERAL, STATE AND LOCAL BUILDING CODES, REGULATIONS, ORDINANCES & STANDARDS INCLUDING ADA & OTHER HANDICAP ACCESSIBILITY CODES.
3. PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION, CONTRACTOR SHALL VERIFY EXISTENCE AND LOCATION OF ALL ABOVE AND BELOW GRADE, UTILITIES, INCLUDING SANITARY SEWER, STORM SEWER, WATER, GAS, ELECTRICAL, TELEPHONE, ETC. ANY DISCREPANCIES IN UTILITY LOCATIONS SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE ARCHITECT. GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR SET UP AND COORDINATION OF ALL UTILITY SERVICES FOR THE PROJECT.
4. GENERAL CONTRACTOR SHALL COORDINATE SCHEDULING AND SEQUENCING OF THE WORK WITH OWNER'S REPRESENTATIVE. GENERAL CONTRACTOR IS RESPONSIBLE FOR COORDINATING THE OWNER'S VENDORS ON SITE DURING CONSTRUCTION.
5. GENERAL CONTRACTOR SHALL PROVIDE AN AS-BUILT SET OF DRAWINGS TO THE [SUPERVISOR(PROJECT MANAGEMENT)] (SPM) AT THE END OF THE PROJECT.
6. GENERAL CONTRACTOR WILL SECURE ALL BUILDING PERMITS & INSPECTIONS NECESSARY FOR THE CONSTRUCTION OF THE PROJECT. UPON COMPLETION OF PROJECT, OBTAIN ALL FINAL INSPECTIONS AS REQUIRED BY LOCAL JURISDICTIONS AND FURNISH OWNER WITH EVIDENCE OF ALL SUCH INSPECTIONS AND CERTIFICATES OF OCCUPANCY.
7. THE GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS PRIOR TO BEGINNING CONSTRUCTION AND REPORT ANY ERRORS OR INCONSISTENCIES TO THE ARCHITECT.
8. THE DRAWINGS ARE NOT TO BE SCALED. LARGE SCALE DRAWINGS HAVE PRECEDENCE OVER SMALL SCALE DRAWINGS.
9. THE CONTRACTOR, WITHOUT EXTRA CHARGE, SHALL MAKE SLIGHT ALTERATIONS - CUTTING, FITTING, OR PATCHING OF HIS WORK AS MAY BE NECESSARY TO MAKE ADJUSTABLE PARTS FIT TO FIXED PARTS, LEAVING ALL IN WORKING ORDER WHEN COMPLETED.
10. WHERE TRENCHING OR CORE DRILLING IS REQUIRED, SUBFLOORING AND/OR SUBSTRATE SHALL BE RETURNED TO A LEVEL CONDITION.
11. GENERAL CONTRACTOR SHALL PROVIDE TERMITE PROTECTION, TO COMPLY WITH FBC 1816.1, UNDER ANY TRENCHING WORK.
12. GENERAL CONTRACTOR IS RESPONSIBLE FOR ALL SITE CUT & FILL TO ATTAIN FINISH GRADES AS INDICATED ON THESE DRAWINGS. GENERAL CONTRACTOR SHALL INCLUDE THE COST OF ANY TOPSOIL REQUIRED IN ADDITION TO THAT ON SITE, AT THE TIME OF THE PRE-BID MEETING, IN BASE BID.
13. GENERAL CONTRACTOR TO BE RESPONSIBLE FOR SITE CLEAN UP NIGHTLY AND SECUREMENT OF THE WORK SITE.
14. ALL NEW CONSTRUCTION SHALL BE VERIFIED TO BE IN COMPLIANCE WITH THE LOCALLY ADOPTED ACCESSIBILITY REGULATIONS. ANYTHING FOUND NOT IN COMPLIANCE SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE. ALL SLOPES SHALL BE MEASURED WITH A 24" SMART LEVEL.
15. GENERAL CONTRACTOR SHALL PERFORM AS NECESSARY A TOPOGRAPHIC SURVEY PRIOR TO STARTING CONSTRUCTION AND REPORT ANY DISCREPANCIES IN GRADES AS COMPARED TO EXISTING GRADES INDICATED ON DRAWINGS. SUBMIT A COPY OF TOPOGRAPHIC SURVEY TO ARCHITECT AND INDICATE ANY DISCREPANCIES ON SURVEY PRIOR TO COMMENCING EARTHWORK WHEN SCOPE OF THE PROJECTS NECESSITATES IT.
16. NOTED ACCESSIBLE ITEMS AND DESCRIPTIONS FOR PARKING LOT, ARE TO BE A PORTION OF THE SHOWN ACCESSIBILITY WORK. COORDINATED WITH PROJECT MANAGER AS REQUIRED TO COMPLETE THE NOTED WORK. WHERE GRADES ARE AFFECTED THE CONTRACTOR SHALL USE A SURVEYOR AS NEEDED TO ENSURE PROPER GRADES ARE ACHIEVED. STRIPING SHALL BE COMPLETED PER THE REQUIREMENTS OF THE CURRENT ADAAG GUIDELINES, AND THE CUSTOMER PATH OF TRAVEL REMEDIATION GUIDELINES (LATEST REVISION) AS WELL AS APPLICABLE STATE AND LOCAL CODES.

SHEET #	SHEET NAME	DRAWINGS ISSUED: 07/02/2026 - PERMIT SET
GENERAL		
G-000	COVER SHEET	●
G-001	LIFE SAFETY PLAN	●
G-002	ACCESSIBILITY NOTES	●
G-003	COMCHECK	●
CIVIL		
C-0.0	COVER	●
C-0.1	GENERAL NOTES	●
C-0.11	GENERAL	●
C-0.12	GENERAL	●
C-1.0	DEMOLITION PLAN	●
C-2.0	ESPC - PHASE 1	●
C-2.1	ESPC - PHASE 2	●
C-2.2	ESPC - PHASE 3	●
C-2.3	ESPC NOTES - 1	●
C-2.4	ESPC NOTES - 2	●
C-2.5	ESPC DETAILS - 1	●
C-2.6	ESPC DETAILS - 2	●
C-3.0	SITE PLAN	●
C-4.0	GRADING PLAN	●
C-5.0	UTILITY PLAN	●
C-6.0	STORM PROFILES	●
C-6.1	SANITARY PROFILES	●
C-7.0	CONSTRUCTION DETAILS - 1	●
C-7.1	CONSTRUCTION DETAILS - 2	●
C-7.2	CONSTRUCTION DETAILS - 3	●
C-7.3	CONSTRUCTION DETAILS - 4	●
C-7.4	CONSTRUCTION DETAILS - 5	●
LANDSCAPE		
L-1.0	LANDSCAPE PLAN	●
L-1.1	LANDSCAPE DETAILS	●

SHEET #	SHEET NAME	DRAWINGS ISSUED: 07/02/2026 - PERMIT SET
ARCHITECTURAL		
A-110	FLOOR PLAN	●
A-120	DIMENSIONAL FLOOR PLAN	●
A-130	REFLECTED CEILING PLAN	●
A-131	ENLARGED REFLECTED CEILING PLAN	●
A-140	ROOF PLAN	●
A-150	FINISH PLAN	●
A-160	FURNITURE & EQUIPMENT	●
A-170	SCHEDULES	●
A-190	TRASH ENCLOSURE AND DETAILS	●
A-200	EXTERIOR ELEVATIONS	●
A-201	EXTERIOR ELEVATIONS	●
A-202	COLOR EXTERIOR ELEVATIONS	●
A-300	BUILDING SECTIONS	●
A-310	EXTERIOR WALL SECTIONS	●
A-311	EXTERIOR WALL SECTIONS	●
A-401	BANK EQUIPMENT PLANS & DETAILS	●
A-402	BANK EQUIPMENT CUT SHEETS	●
A-410	ENLARGED RESTROOM PLANS & ELEVATIONS	●
A-420	ENLARGED WING WALL PLANS & ELEVATIONS	●
A-430	SECTION DETAILS	●
A-440	PLAN DETAILS	●
A-450	ROOF DETAILS	●
A-600	DOOR SCHEDULE & DETAILS	●
A-601	HARDWARE SCHEDULES	●
A-610	WINDOW ELEVATIONS	●
A-620	INTERIOR PARTITION SCHEDULE & DETAILS	●
A-630	CEILING DETAILS	●
A-700	TRANSACTION BAR - ENLARGED PLAN & DETAILS	●
A-701	BACK COUNTER - ENLARGED PLAN & DETAILS	●
A-702	LIBRARY - ENLARGED PLAN & DETAILS	●
A-703	SERVICE COUNTER - ENLARGED PLAN & DETAILS	●
A-704	TECH WALL & LOUNGE BOOTH - ENLARGED PLAN & DETAILS	●
A-705	EMPLOYEE LOUNGE - ENLARGED PLAN & DETAILS	●
A-706	BOOTH - ENLARGED PLAN & DETAILS	●
A-707	WORK ROOM - ENLARGED PLAN & DETAILS	●
A-708	CHECK DESK - ENLARGED PLAN & DETAILS	●
STRUCTURAL		
S-001	GENERAL NOTES	●
S-002	GENERAL NOTES	●
S-003	SPECIAL INSPECTIONS SCHEDULES	●
S-201	STRUCTURAL PLAN - FOUNDATION	●
S-203	STRUCTURAL PLAN - ROOF	●
S-301	ELEVATIONS - STEEL FRAMES	●
S-410	EXTERIOR AXONOMETRICS	●
S-411	EXTERIOR AXONOMETRICS	●
S-600	WALL SECTIONS - FOUNDATION	●
S-601	WALL SECTIONS	●
S-602	WALL SECTIONS	●
S-603	WALL SECTIONS	●
S-680	TYPICAL DETAILS (FOUNDATION)	●
S-681	TYPICAL DETAILS (STEEL)	●
S-682	TYPICAL DETAILS (STEEL)	●
S-683	ENLARGED STEEL DETAILS	●
S-685	TYPICAL DETAILS (MISC)	●
MECHANICAL		
M-001	MECHANICAL NOTES AND SPECIFICATIONS	●
M-002	MECHANICAL NOTES AND LEGEND	●
M-101	MECHANICAL SCHEDULES	●
M-102	MECHANICAL VENTILATION SCHEDULES	●
M-301	MECHANICAL PROPOSED CEILING PLAN	●
M-302	MECHANICAL PROPOSED ROOF PLAN	●
M-401	MECHANICAL ISOMETRIC PLAN	●
M-501	MECHANICAL DETAILS	●
M-502	MECHANICAL DETAILS AND CONTROLS	●
M-503	MECHANICAL CONTROLS DETAILS	●
M-700	MECHANICAL DUCT SECTION VIEWS	●
PLUMBING		
P-001	PLUMBING SPECIFICATIONS AND NOTES	●
P-101	PLUMBING TABLES AND SCHEDULES	●
P-301	PLUMBING SANITARY FOUNDATION PLAN	●
P-302	PLUMBING DOMESTIC FLOOR PLAN	●
P-303	PLUMBING PROPOSED ROOF PLAN	●
P-401	PLUMBING BUILDING ISOMETRIC	●
P-402	PLUMBING ISOMETRIC RISER DIAGRAM	●
P-403	PLUMBING NATURAL GAS ISO PLAN	●
P-501	PLUMBING DETAILS	●
ELECTRICAL		
E-001	ELECTRICAL LEGEND AND ABBREVIATION	●
E-002	ELECTRICAL GENERAL NOTES	●
E-003	ELECTRICAL SPECIFICATIONS	●
E-004	COMCHECK	●
E-010	ELECTRICAL SITE PLAN AND REMOTE DRIVE THRU	●
E-011	ELECTRICAL PHOTOMETRIC SITE PLAN	●
E-012	ELECTRICAL SITE DETAILS	●
E-100	ELECTRICAL POWER & AUXILIARY PLAN	●
E-101	ELECTRICAL POWER ROOF PLAN	●
E-130	ELECTRICAL LIGHTING PLAN	●
E-150	ELECTRICAL SECURITY PLAN	●
E-160	ELECTRICAL FIRE ALARM PLAN	●
E-500	ELECTRICAL DETAILS	●
E-600	LUMINAIRE AND SENSOR SCHEDULES AND DETAILS	●
E-601	EXTERIOR LIGHTING CUTSHEETS	●
E-602	EXTERIOR LIGHTING CUTSHEETS	●
E-603	EXTERIOR LIGHTING CUTSHEETS	●
E-610	ELECTRICAL PANEL SCHEDULES	●
E-700	ELECTRICAL DEVICE PLAN	●
E-701	ELECTRICAL ELEVATIONS	●
E-702	ELECTRICAL ELEVATIONS	●
E-703	ELECTRICAL ELEVATIONS	●
E-704	ELECTRICAL ELEVATIONS	●
E-800	ELECTRICAL RISER DIAGRAM	●
FIRE ALARM		
FA-001	FIRE ALARM LEGEND AND GENERAL NOTES	●
FA-002	FIRE ALARM RISER & DETAILS	●
FA-101	FIRE ALARM PLAN	●
SECURITY (FOR REFERENCE ONLY)		
BS01	SECURITY DEVICE LOCATIONS	●
BS02	CCTV SWEEPS	●
BS03	PACOM PANEL DETAILS	●
BS04	ELECTRICAL DEVICE LOCATIONS	●

PRAXIS3
100 Peachtree St NW
Suite 1450
Atlanta, GA 30303
404-875-4500 tel
www.praxis3.com

STATE OF GEORGIA
STUART M. ROMM
07/02/26
CERTIFICATE NO. 3457
REGISTERED ARCHITECT

Copyright (c) 2026 Praxis3, LLC

All reports, plans, specifications, computer files, field data, notes and other documents and instruments prepared by Praxis3 shall retain all common law, statutory and other reserved rights, including copyright thereto.

This drawing may not be reproduced in whole or in part without written permission of Praxis3. It is to be returned upon request. Scales as stated are valid on the original drawings.

Rev	Date	Comments
	07/02/2026	PERMIT SET

Client:
FIFTH THIRD BANK

Project Number: 26302
Project Name:
WATSON BLVD.

2711 WATSON BOULEVARD
WARNER ROBINS, GA 31093

Key Plan:

Sheet Title:
COVER SHEET

Sheet Number:
G-000

7/8/2026 2:37:26 PM